

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

Overview


More information

Homepage, see www.siemens.com/sirius-circuit-breaker
 Industry Mall, see www.siemens.com/product?3RV2
 TIA Selection Tool Cloud (TST Cloud), see <https://www.siemens.com/tstcloud/?node=MotorStarterProtector>
 Conversion tool for article numbers, see www.siemens.com/sirius/conversion-tool

Application Manual "SIRIUS Controls with IE3/IE4 motors", see <https://support.industry.siemens.com/cs/ww/en/view/94770820>
 System Manual "SIRIUS – System Overview", see <https://support.industry.siemens.com/cs/ww/en/view/60311318>
 Equipment Manual, see <https://support.industry.siemens.com/cs/ww/en/view/60279172>
 Certificates, see <https://support.industry.siemens.com/cs/ww/en/ps/16245/cert>

The following illustration shows 3RV2 motor starter protectors/circuit breakers with the accessories which can be mounted for the sizes S00 to S3, see also "Introduction" → "Overview", page 7/2.

Accessories, see page 7/43 onwards.

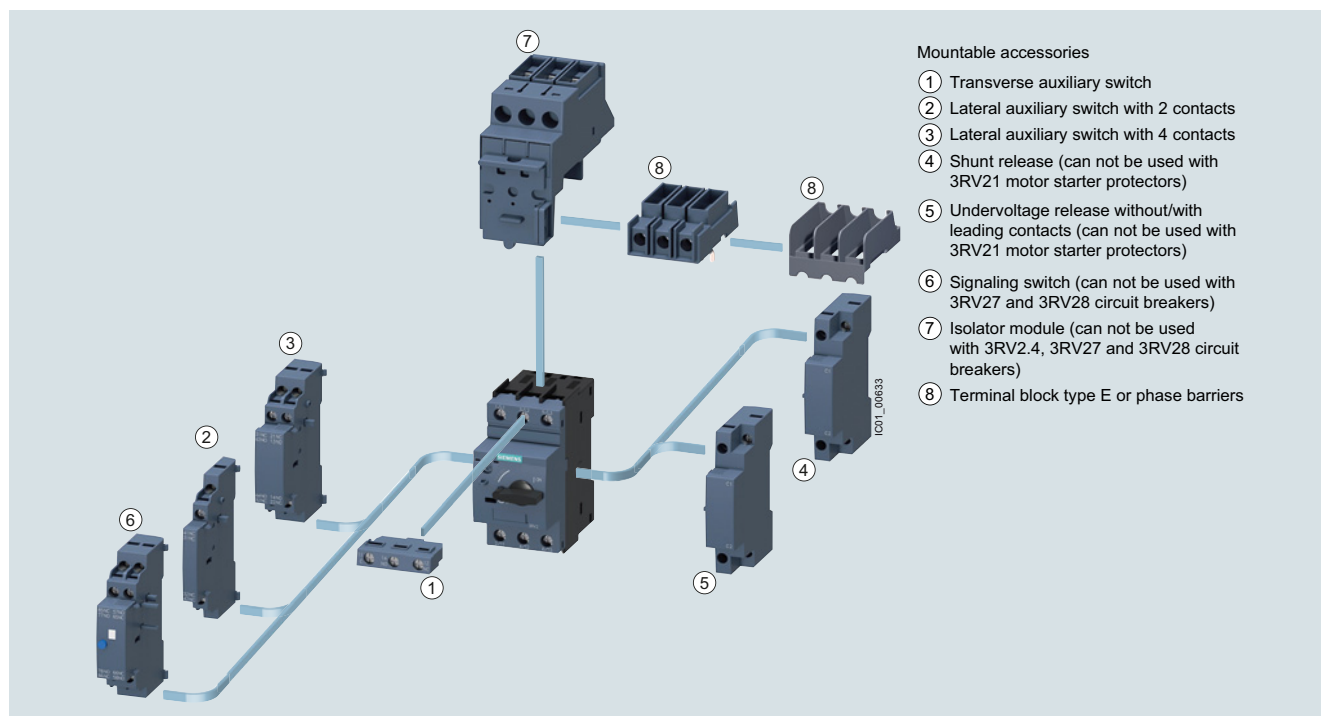

Mountable accessories for SIRIUS 3RV2 motor starter protectors/circuit breakers



SIRIUS motor starter protector with spring-loaded terminals, size S0 (left) and SIRIUS motor starter protector with screw terminals, size S00 (right)

The SIRIUS 3RV2 motor starter protectors/circuit breakers are compact, current limiting motor starter protectors/circuit breakers which are optimized for load feeders. The motor starter protectors/circuit breakers are used for switching and protecting three-phase motors of up to 55/45 kW at 400 V AC and for other loads with rated currents of up to 100 A.

The new 3RV2 motor starter protectors/circuit breakers are usually approved according to IEC and UL/CSA. According to UL 508/UL 60947-4-1, the 3RV2 motor starter protectors/circuit breakers in sizes S00 to S3 are approved as:

- "Manual Motor Controllers"
 - "Manual Motor Controllers" for "Group Installations"
 - "Manual Motor Controllers Suitable for Tab Conductor Protection in Group Installations"
 - "Self-Protected Combination Motor Controllers (Type E)"
- Please note that for this approval the 3RV20 motor starter protectors must be equipped with additional infeed terminals or phase barriers. For more information, see "Accessories" on page 7/52.

Corresponding short-circuit values, see pages 7/10 to 7/18.

The 3RV27 and 3RV28 are approved as circuit breakers according to UL 489; they are a special version of the 3RV2 motor starter protectors.

Thanks to their dimensions, the 3RV1011 motor starter protectors are suitable for installation in enclosures or under cramped installation conditions.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

Type of construction

The 3RV2 motor starter protectors are available in four sizes:

- Size S00 – width 45 mm, max. rated current 16 A, at 400 V AC suitable for three-phase motors up to 7.5 kW
- Size S0 – width 45 mm, max. rated current 40 A, at 400 V AC suitable for three-phase motors up to 18.5 kW
- Size S2 – width 55 mm, max. rated current 80 A, at 400 V AC suitable for three-phase motors up to 37 kW
- Size S3 – width 70 mm, max. rated current 100 A, at 400 V AC suitable for three-phase motors up to 45/55 kW

Circuit breakers acc. to UL 489

The 3RV27 and 3RV28 circuit breakers are available in two or three sizes:

- Size S00 – width 45 mm, max. rated current 15 A, for 480 Y/277 V AC
- Size S0 – width 45 mm, max. rated current 22 A, for 480 Y/277 V AC
- Size S3 – width 70 mm, max. rated current 70 A, for 480 Y/277 V AC

Connection methods

The 3RV2 motor starter protectors/circuit breakers can be supplied with screw terminals and spring-loaded terminals.



Screw terminals



Spring-loaded terminals

The terminals are indicated in the corresponding tables by the symbols shown on orange backgrounds.

Use in hazardous areas

The 3RV20 motor starter protectors for motor protection in sizes S00, S0, S2 and S3 have certification in accordance with both the European explosion protection directive ATEX and the international explosion protection standard (IECEx).

In accordance with the European directive (ATEX), the 3RV20 are able to switch and protect explosion-proof motors of type of protection "Increased Safety EEx e".

In accordance with the international guideline (IECEx), the 3RV20 are able to switch and protect motors of the types "Increased Safety Ex e" or "Flameproof enclosure Ex d".

Article No. scheme

Product versions		Article number									
Motor starter protectors/circuit breakers		3RV2	☐	☐	☐	☐	☐	☐	☐	☐	☐
Type of motor starter protector/circuit breaker	e.g. 0 = for motor protection/system protection	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
Size	e.g. 1 = 16 A (7.5 kW) for size S00	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
Breaking capacity	e.g. 1 = standard switching capacity	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
Setting range for overload release	e.g. 1A = 1.1 ... 1.6 A	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
Trip class (CLASS)	e.g. A = a (adjustable CLASS 10) / n (13 or 20 x I_n)	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
Connection methods	e.g. 1 = screw terminal	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
With or without auxiliary switch	e.g. 0 = without	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
Special versions		☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
Example		3RV2	0	1	1	-	1	A	A	1	0

Note:

The Article No. scheme shows an overview of product versions for better understanding of the logic behind the article numbers.

For your orders, please use the article numbers quoted in the selection and ordering data.

Application

Operating conditions

3RV2 motor starter protectors/circuit breakers are suitable for use in any climate. They are intended for use in enclosed rooms in which no severe operating conditions (such as dust, caustic vapors, hazardous gases) prevail. When installed in dusty and damp areas, suitable enclosures must be provided.

3RV2 motor starter protectors/circuit breakers can optionally be fed from the top or from below.

The permissible ambient temperatures, the maximum switching capacities, the tripping currents and other boundary conditions can be found in the technical specifications and tripping characteristics.

3RV2 motor starter protectors/circuit breakers are suitable for operation in IT systems (IT networks). In this case, the different short-circuit breaking capacity in the IT system must be taken into account, [see page 7/12](#).

Since operational currents, starting currents and current peaks are different even for motors with identical power ratings due to the inrush current, the motor ratings in the selection tables are only guide values. The specific rated and startup data of the motor to be protected is always paramount to the choice of the most suitable motor starter protector/circuit breaker. This also applies to motor starter protectors for transformer protection.

Possible uses

The 3RV motor starter protectors/circuit breakers can be used:

- For short-circuit protection
- For motor protection (also with overload relay function)
- For system protection
- For short-circuit protection for starter combinations
- For transformer protection
- As main and EMERGENCY STOP switches
- For operation in IT systems (IT networks)
- For switching of DC currents
- In hazardous areas (ATEX)
- As circuit breakers according to UL 489 (3RV27 and 3RV28)
- For fuse monitoring
- For distance protection

Special versions of 3RV2 motor starter protectors/circuit breakers can be used for low ambient temperatures down to -50 °C or also for system protection. More detailed information is available on request.

Use of SIRIUS protection devices in conjunction with IE3/IE4 motors

Note:

For the use of 3RV2 motor starter protectors/circuit breakers in conjunction with highly energy-efficient IE3/IE4 motors, please observe the information on dimensioning and configuring, [see Application Manual](#).

For more information, [see page 1/7](#).

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

Technical specifications

More information

System Manual "SIRIUS – System Overview", see <https://support.industry.siemens.com/cs/ww/en/view/60311318>
 Configuration Manual "Load Feeders – SIRIUS Modular System", see <https://support.industry.siemens.com/cs/ww/en/view/39714188>

Equipment Manual, see <https://support.industry.siemens.com/cs/ww/en/view/60279172>
 Technical specifications, see <https://support.industry.siemens.com/cs/ww/en/ps/16245/td>
 UL reports of the individual devices, see www.siemens.com/sirius/manuals

Short-circuit breaking capacity I_{cu} , I_{cs} according to IEC 60947-2

The table shows the rated ultimate short-circuit breaking capacity I_{cu} and the rated service short-circuit breaking capacity I_{cs} of the 3RV motor starter protectors/circuit breakers with different operating voltages dependent on the rated current I_n of the motor starter protectors/circuit breakers.

Power can be supplied to the motor starter protectors/circuit breakers via the terminals at the top or at the bottom without restricting the rated data. If the short-circuit current at installation location exceeds the motor starter protector/circuit breaker's specified rated short-circuit breaking capacity, you will need to

use a back-up fuse. It is also possible to install an upstream motor starter protector/circuit breaker with a limiter function.

The maximum rated current of this back-up fuse is indicated in the tables. The rated ultimate short-circuit breaking capacity then applies as specified on the fuse.

Fuseless design

Motor starter protector/contactors assemblies for short-circuit currents up to 150 kA can be ordered as 3RA2 fuseless load feeders, see page 8/4 onwards.

Motor starter protectors/ circuit breakers	Rated current I_n	Up to 240 V AC ¹⁾			Up to 400 V AC ^{1)/415 V AC²⁾}			Up to 440 V AC ^{1)/460 V AC²⁾}			Up to 500 V AC ^{1)/525 V AC²⁾}			Up to 690 V AC ¹⁾		
		I_{cu}	I_{cs}	Max. fuse (gG)	I_{cu}	I_{cs}	Max. fuse (gG) ³⁾	I_{cu}	I_{cs}	Max. fuse (gG) ³⁾	I_{cu}	I_{cs}	Max. fuse (gG) ³⁾	I_{cu}	I_{cs}	Max. fuse (gG) ³⁾⁴⁾
Type	A	kA	kA	A	kA	kA	A	kA	kA	A	kA	kA	A	kA	kA	A
Size S00																
3RV1011	0.16 ... 1	100	100	--	100	100	--	100	100	--	100	100	--	100	100	--
	1.25, 1.6	100	100	--	100	100	--	100	100	--	100	100	--	2	2	20
	2; 2.5	100	100	--	100	100	--	100	100	--	10	10	35	2	2	35
	3.2; 4	100	100	--	100	100	--	50	12.5	40	3	3	40	2	2	40
	5; 6.3	100	100	--	100	100	--	50	12.5	50	3	3	50	2	2	40
	8	100	100	--	50	12.5	80	50	12.5	63	3	3	63	2	2	50
	10	100	100	--	50	12.5	80	10	10	63	3	3	63	2	2	50
	12	100	100	--	50	12.5	80	10	10	80	3	3	80	2	2	50
3RV2.11	0.16 ... 1.6	100	100	--	100	100	--	100	100	--	100	100	--	100	100	--
	2; 2.5	100	100	--	100	100	--	100	100	--	100	100	--	10	10	25
	3.2	100	100	--	100	100	--	100	100	--	100	100	--	10	10	32
	4; 5	100	100	--	100	100	--	100	100	--	100	100	--	6	4	32
	6.3	100	100	--	100	100	--	100	100	--	100	100	--	6	4	50
	8	100	100	--	100	100	--	50	50	63	42	42	63	6	4	50
	10	100	100	--	100	100	--	50	50	80	42	42	63	6	4	50
	12.5	100	100	--	100	100	--	50	50	80	42	42	80	6	4	63
16	100	100	--	55	30	100	50	12.5	80	10	5	80	4	4	63	
3RV1611-0BD10	0.2	100	100	--	100	100	--	100	100	--	100	100	--	100	100	--
Size S0																
3RV2.21	0.16 ... 1.6	100	100	--	100	100	--	100	100	--	100	100	--	100	100	--
	2; 2.5	100	100	--	100	100	--	100	100	--	100	100	--	10	10	25
	3.2	100	100	--	100	100	--	100	100	--	100	100	--	10	10	32
	4; 5	100	100	--	100	100	--	100	100	--	100	100	--	6	4	32
	6.3	100	100	--	100	100	--	100	100	--	100	100	--	6	4	50
	8	100	100	--	100	100	--	50	50	63	42	42	63	6	4	50
	10	100	100	--	100	100	--	50	50	80	42	42	63	6	4	50
	12.5	100	100	--	100	100	--	50	50	80	42	42	80	6	4	63
	16	100	100	--	55	25	100	50	12.5	80	10	5	80	4	2	63
	20	100	100	--	55	25	125	50	10	80	10	5	80	4	2	63
	22; 25	100	100	--	55	25	125	50	10	100	10	5	80	4	2	63
	28; 32	100	100	--	55	25	125	30	10	125	10	5	100	4	2	100
	36; 40	100	100	--	20	10	125	12	8	125	6	3	100	3	2	100

-- No back-up fuse required, since short-circuit resistant up to 100 kA

1) 10% overvoltage.

2) 5% overvoltage.

3) Back-up fuse only required if short-circuit current at installation location is $> I_{cu}$.

4) Alternatively, fuseless limiter combinations for 690 V AC can also be used.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

Motor starter protectors/circuit breakers	Rated current I_n	Up to 240 V AC ¹⁾			Up to 400 V AC ^{1)/415 V AC²⁾}			Up to 440 V AC ^{1)/460 V AC²⁾}			Up to 500 V AC ^{1)/525 V AC²⁾}			Up to 690 V AC ¹⁾		
		I_{cu}	I_{cs}	Max. fuse (gG)	I_{cu}	I_{cs}	Max. fuse (gG) ³⁾	I_{cu}	I_{cs}	Max. fuse (gG) ³⁾	I_{cu}	I_{cs}	Max. fuse (gG) ³⁾	I_{cu}	I_{cs}	Max. fuse (gG) ³⁾⁴⁾
Type	A	kA	kA	A	kA	kA	A	kA	kA	A	kA	kA	A	kA	kA	A
Size S2																
3RV2.31	14; 17	100	100	--	65	30	100	50	25	100	12	6	63	5	3	63
	20	100	100	--	65	30	100	50	25	100	12	6	80	5	3	80
	25	100	100	--	65	30	100	50	15	100	12	6	80	5	3	80
	32; 36	100	100	--	65	30	125	50	15	125	10	5	100	4	2	100
	40; 45	100	100	--	65	30	160	50	15	125	10	5	100	4	2	100
	52	100	100	--	65	30	160	50	15	125	10	5	125	4	2	125
	59; 65	100	100	--	65	30	160	50	15	160	8	4	125	4	2	125
	73; 80	100	100	--	65	30	200	50	15	200	8	4	160	4	2	125
Size S2, with increased switching capacity																
3RV2.32	14; 17	100	100	--	100	50	--	65	30	100	18	10	63	8	5	63
	20; 25	100	100	--	100	50	--	65	30	100	18	10	80	8	5	80
	32 ... 45	100	100	--	100	50	--	65	30	125	15	8	100	6	4	100
	52	100	100	--	100	50	--	65	30	125	15	8	125	6	4	125
	59; 65	100	100	--	100	50	--	50	15	160	10	5	125	6	4	125
Size S3	73; 80	100	100	--	100	50	--	50	15	200	10	5	160	6	4	125
Size S3																
3RV2.41	40	100	100	--	65	30	125	65	30	125	12	6	100	6	3	63
	50	100	100	--	65	30	125	65	30	125	12	6	100	6	3	80
	63	100	100	--	65	30	160	65	30	160	12	6	100	6	3	80
	75	100	100	--	65	30	160	65	30	160	8	4	125	5	3	100
	84 ... 100	100	100	--	65	30	160	65	30	160	8	4	125	5	3	125
Size S3, with increased switching capacity																
3RV2.42	40	100	100	--	100	50	--	100	50	--	18	9	160	12	6	80
	50	100	100	--	100	50	--	100	50	--	15	7.5	160	10	5	100
	63	100	100	--	100	50	--	70	50	200	15	7.5	160	7.5	4	100
	75	100	100	--	100	50	--	70	50	200	10	5	160	6	3	125
	84 ... 100	100	100	--	100	50	--	70	50	200	10	5	160	6	3	160
3RV2742⁵⁾	up to 70 A	100	100	--	100	50	--	On request								

-- No back-up fuse required, since short-circuit resistant up to 100 kA

1) 10% overvoltage.

2) 5% overvoltage.

3) Back-up fuse only required if short-circuit current at installation location is $> I_{cu}$.

4) Alternatively, fuseless limiter combinations for 690 V AC can also be used.

5) The values for the 3RV2742 circuit breakers have been tested only up to 400 V/415 V AC.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

Short-circuit breaking capacity I_{cuIT} in the IT system (IT network) according to IEC 60947-2

3RV motor starter protectors/circuit breakers are suitable for use in IT systems. The values of I_{cu} and I_{cs} apply for the 3-pole short circuit. In the case of a double ground fault in different phases at the input and output side of a motor starter protector/circuit breaker, the special short-circuit breaking capacity I_{cuIT} applies. The specifications in the table below apply to 3RV motor starter protectors/circuit breakers.

If the short-circuit current at installation location exceeds the motor starter protector/circuit breaker's specified rated short-circuit breaking capacity, you will need to use a back-up fuse. The maximum rated current of this back-up fuse is indicated in the tables. The rated short-circuit breaking capacity then applies as specified on the fuse.

Motor starter protectors/ circuit breakers	Rated current I_n	Up to 240 V AC ¹⁾		Up to 400 V AC ^{1)/415 V AC²⁾}		Up to 440 V AC ^{1)/460 V AC²⁾}		Up to 500 V AC ^{1)/525 V AC²⁾}		Up to 690 V AC ¹⁾⁵⁾	
		I_{cuIT}	Max. fuse (gG) ³⁾	I_{cuIT}	Max. fuse (gG) ³⁾⁴⁾	I_{cuIT}	Max. fuse (gG) ³⁾	I_{cuIT}	Max. fuse (gG) ³⁾	I_{cuIT}	Max. fuse (gG) ³⁾
Type	A	kA	A	kA	A	kA	A	kA	A	kA	A
Size S00											
3RV1011	0.16 ... 0.4	100	--	100	--	100	--	100	--	100	--
	0.5	100	--	100	--	100	--	100	--	0.5	4
	0.63	100	--	100	--	6	6	6	6	0.5	6
	0.8	100	--	100	--	5	6	5	6	0.5	6
	1	100	--	4	10	2	10	2	10	0.5	10
	1.25	100	--	2	20	2	16	2	16	0.5	16
	1.6	100	--	2	20	2	20	2	20	1	16
	2	100	--	2	35	2	25	2	25	1	20
	2.5	100	--	2	35	2	25	2	25	1	25
	3.2	100	--	2	40	2	35	2	35	1	25
	4	100	--	2	40	2	35	2	35	1	35
	5	100	--	2	50	2	35	2	35	1	35
	6.3	100	--	2	50	2	40	2	40	1	40
	8	50	80	2	63	2	40	2	40	1	40
	10	50	80	2	63	2	50	2	50	1	50
	12	50	80	2	80	2	50	2	50	1	50
3RV2.11	0.16 ... 0.4	100	--	100	--	100	--	100	--	100	--
	0.5	100	--	100	--	100	--	100	--	0.5	4
	0.63; 0.8	100	--	100	--	100	--	100	--	0.5	6
	1	100	--	100	--	2	10	2	10	1.5	10
	1.25	100	--	100	--	2	16	2	16	1.5	16
	1.6	100	--	100	--	2	20	2	20	1.5	16
	2; 2.5	100	--	8	25	2	25	2	25	1.5	20
	3.2	100	--	8	32	2	32	2	32	1.5	25
	4; 5	100	--	4	32	1.5	32	1.5	32	1.5	25
	6.3; 8	100	--	4	50	1	40	1	40	1	35
	10	100	--	4	50	1	40	1	40	1	40
	12.5	100	--	4	63	1	50	1	50	1	40
	16	55	80	4	63	1	50	1	50	1	40
Size S0											
3RV2.21	0.16 ... 0.4	100	--	100	--	100	--	100	--	100	--
	0.5	100	--	100	--	100	--	100	--	0.5	4
	0.63; 0.8	100	--	100	--	100	--	100	--	0.5	6
	1	100	--	100	--	2	10	2	10	1.5	10
	1.25	100	--	100	--	2	16	2	16	1.5	16
	1.6	100	--	100	--	2	20	2	20	1.5	16
	2; 2.5	100	--	8	25	2	25	2	25	1.5	20
	3.2	100	--	8	32	2	32	2	32	1.5	25
	4; 5	100	--	4	32	1.5	32	1.5	32	1.5	25
	6.3; 8	100	--	4	50	1	40	1	40	1	35
	10	100	--	4	50	1	40	1	40	1	40
	12.5	100	--	4	63	1	50	1	50	1	40
	16	55	80	4	63	1	50	1	50	1	40
	20 ... 25	55	80	4	63	1	50	1	50	1	50
	28; 32	55	80	2	63	1	63	1	63	1	63
	36; 40	20	80	2	63	1	63	1	63	1	63

-- No back-up fuse required, since short-circuit resistant up to 100 kA

¹⁾ 5% overvoltage.

²⁾ Without overvoltage.

³⁾ Back-up fuse only required if short-circuit current at installation location is $> I_{cuIT}$.

⁴⁾ Alternatively, fuseless limiter combinations for 690 V AC can also be used.

⁵⁾ Overvoltage category II applies for applications in IT systems > 600 V.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

Motor starter protectors/circuit breakers	Rated current I_n	Up to 240 V AC ¹⁾		Up to 400 V AC ^{1)/415 V AC²⁾}		Up to 440 V AC ^{1)/460 V AC²⁾}		Up to 500 V AC ^{1)/525 V AC²⁾}		Up to 690 V AC ¹⁾⁵⁾	
		I_{cuIT}	Max. fuse (gG) ³⁾	I_{cuIT}	Max. fuse (gG) ³⁾⁴⁾	I_{cuIT}	Max. fuse (gG) ³⁾	I_{cuIT}	Max. fuse (gG) ³⁾	I_{cuIT}	Max. fuse (gG) ³⁾
Type	A	kA	A	kA	A	kA	A	kA	A	kA	A
Size S2											
3RV2031, 3RV2131, 3RV2331	14 ... 25	100	--	8	100	6	80	6	80	4	63
	32 ... 45	100	--	6	125	4	100	4	100	3	80
	52 ... 80	100	--	4	160	3	125	3	125	2	100
Size S2, with increased switching capacity											
3RV2032, 3RV2332	14 ... 25	100	--	8	100	6	80	6	80	4	63
	32 ... 45	100	--	6	125	6	100	6	100	4	80
	52	100	--	6	160	6	125	6	125	4	100
	59 ... 80	100	--	6	160	4	125	4	125	4	100
Size S3											
3RV2.41	40	65	125	10	63	5	50	5	50	5	50
	50	65	125	8	80	3	63	3	63	3	63
	63	65	160	6	80	3	63	3	63	3	63
	75	65	160	5	100	2	80	2	80	2	80
	84; 100	65	160	5	125	2	100	2	100	2	100
Size S3, with increased switching capacity											
3RV2.42	40	100	--	12	80	6	63	6	63	6	63
	50	100	--	10	100	4	80	4	80	4	80
	63	100	--	7.5	100	4	80	4	80	4	80
	75	100	--	6	125	3	100	3	100	3	100
	84; 100	100	--	6	160	3	125	3	125	3	125

-- No back-up fuse required, since short-circuit resistant up to 100 kA

1) 10% overvoltage.

2) 5% overvoltage.

3) Back-up fuse only required if short-circuit current at installation location is $> I_{cuIT}$.

4) Alternatively, fuseless limiter combinations for 690 V AC can also be used.

5) Overvoltage category II applies for applications in IT systems > 600 V.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

Limiter function with standard devices for 500 V AC and 690 V AC according to IEC 60947-2

The table shows the rated ultimate short-circuit breaking capacity I_{cu} and the rated service short-circuit breaking capacity I_{cs} with an upstream standard motor starter protector/circuit breaker that fulfills the limiter function at voltages 500 V AC and 690 V AC.

The short-circuit breaking capacity can be increased significantly with an upstream standard motor starter protector/circuit breaker with limiter function. The motor starter protector/circuit breaker which is connected downstream must be set to the rated current of the load.

With motor starter protector/circuit breaker assemblies, note the clearance to grounded parts and between the motor starter protectors/circuit breaker. Short-circuit proof wiring between the motor starter protectors/circuit breakers must be ensured. The motor starter protectors/circuit breakers can be mounted side by side in a modular arrangement.

Standard motor starter protectors/circuit breakers		Rated current I_n	Up to 500 V AC ^{1)/525 V AC²⁾}		Up to 690 V AC ¹⁾⁵⁾	
With limiter Rated current I_n			I_{cu} kA	I_{cs} kA	I_{cu} kA	I_{cs} kA
Type	Type	A				
Size S00						
Size S0: 3RV2321-4EC10 $I_n = 32$ A	3RV2011	2 ... 6.3 8 10 ... 16	-- 100 100	-- 50 50	50 50 20 ³⁾	25 25 10 ³⁾
Size S2: 3RV2331-4WC10 $I_n = 52$ A	3RV2011	10 ... 16	--	--	50	25
Size S0						
Size S0: 3RV2321-4EC10 $I_n = 32$ A	3RV2021	12 ... 32	100	50	20 ³⁾	10 ³⁾
Size S2: 3RV2331-4WC10 $I_n = 52$ A	3RV2021	16 ... 32	--	--	50	20
Size S2, with increased switching capacity						
Size S2: 3RV2332-4RC10 $I_n = 80$ A	3RV2032	14 ... 80	100	50	70	35
Size S3, with increased switching capacity						
Size S3 ⁴⁾ : 3RV2342-4MC10 $I_n = 100$ A	3RV2042	40 ... 100	100	50	50	25

-- No limiter required

¹⁾ 10% overvoltage.

²⁾ 5% overvoltage.

³⁾ Infeed to the limiter is always on the side 1L1/3L2/5L3.

⁴⁾ Infeed to the limiter only on the side 2T1/4T2/6T3. At the infeed side phase barriers have to be used.

⁵⁾ Use phase barriers on the infeed side.

These motor starter protectors/circuit breakers can be used as "Manual Motor Controllers" for "Group Installations", as "Manual Motor Controllers Suitable for Tap Conductor Protection in Group Installations" and as "Self-Protected Combination Motor Controllers (Type E)".

If used as a "Manual Motor Controller", the motor starter protector is always operated in combination with an upstream short-circuit protection device. Approved fuses or motor starter protectors/ circuit breakers according to UL 489/CSA C22.2 No. 5 may be used for this purpose. These devices must be dimensioned according to the National Electrical Code (UL) or Canadian Electrical Code (CSA).

- UL File No. 47705, CCN: NLRV
- CSA Master Contract 165071, Product Class: 3211

- No approval

³⁾ Corresponds to "short-circuit breaking capacity" according to UL/CSA.

6) With Class J fuse 300 A.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

3RV20 motor starter protectors (up to 100 A) as "Manual Motor Controllers Suitable for Tap Conductor Protection in Group Installations"

The application as "Manual Motor Controllers Suitable for Tap Conductor Protection in Group Installations" is only available for UL. CSA does not recognize this approval! When the motor starter protector is used as a "Manual Motor Controller Suitable for Tap Conductor Protection in Group Installations", it must always be combined with upstream short-circuit protection. Approved fuses or a circuit breaker according to UL 489 may be used for this purpose. These devices must be dimensioned according to the National Electrical Code.

The 3RV20 motor starter protectors are approved as "Manual Motor Controllers Suitable for Tap Conductor Protection in Group Installations" under the following file number:

- UL File No. 47705, CCN: NLRV

Motor starter protectors/ circuit breakers		hp rating ¹⁾ for FLA ²⁾ max.		Rated current I_n	240 V AC	480 Y/277 V AC	600 Y/347 V AC
Type	V	Single- phase	Three- phase	A	UL I_{bc} ³⁾ kA	UL I_{bc} ³⁾ kA	UL I_{bc} ³⁾ kA
Size S00							
3RV1011				0.16 ... 0.8	65	65	10
FLA ²⁾ max. 8 A, 480 V	115	1/3	--	1	65	65	10
	200	3/4	2	1.25	65	65	10
	230	1	2	2	65	65	10
	460	--	5	2.5	65	65	10
	575/600	--	--	3.2	65	65	10
				4	65	65	10
				5	65	65	10
				6.3	65	65	10
				8	65	65	10
3RV2011				0.16 ... 12.5	65	65	30
FLA ²⁾ max. 16 A, 480 V 12.5 A, 600 V	115/120	1	2	16	65	65	--
	200/208	2	3				
	230/240	2	5				
	460/480	--	10				
	575/600	--	10				
Size S0							
3RV2021				0.16 ... 12.5	65	65	30
FLA ²⁾ max. 32 A, 480 V 12.5 A, 600 V	115/120	2	5	16 ... 25	65	65	--
	200/208	3	10	28; 32	50	50	--
	230/240	5	10				
	460/480	--	20				
	575/600	--	--				
Size S2							
3RV2031				14 ... 36	65	65	25
FLA ²⁾ max. 80 A, 480 V 52 A, 600 V	115/120	7 1/2	10	40 ... 52	65	65	22
	200/208	15	25	59 ... 65	65	30	--
	230/240	15	30	73	65	20	--
	460/480	--	60	80	65	10	--
	575/600	--	75				
Size S2, with increased switching capacity							
3RV2032				14 ... 36	100	100	25
FLA ²⁾ max. 80 A, 480 V 52 A, 600 V	115/120	7 1/2	10	40 ... 52	100	100	22
	200/208	15	25	59 ... 65	100	42	--
	230/240	15	30	73	100	30	--
	460/480	--	60	80	100	10	--
	575/600	--	75				
Size S3							
3RV204.				40 ... 75	65	65	30
FLA ²⁾ max. 100 A, 480 V 75 A, 600 V	115/120	7 1/2	15	84 ... 100	65	65	--
	200/208	15	30				
	230/240	20	40				
	460/480	--	75				
	575/600	--	75				

-- No approval

¹⁾ hp rating = Power rating in horse power (maximum motor rating).

²⁾ FLA = Full Load Amps/motor full load current.

³⁾ Corresponds to "short-circuit breaking capacity" according to UL.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

3RV20 motor starter protectors (up to 100 A) as "Self-Protected Combination Motor Controllers (Type E)"

UL 508/UL 60947-4-1 approval demands 1-inch clearance and 2-inch creepage distance at line side for "Self-Protected Combination Motor Controllers".

Therefore, 3RV20 motor starter protectors of sizes S00 to S3 are approved according to UL 508/UL 60947-4-1 in combination with the terminal blocks listed below.

CSA does not require these extended clearances. According to CSA, these terminal blocks can be omitted when the device is used as a "Self-Protected Combination Motor Controller".

The 3RV20 motor starter protectors are approved as "Self-Protected Combination Motor Controllers" under the following file numbers:

- UL File No. E156943, CCN: NKJH
- CSA Master Contract 165071, Product Class: 3211 08

Motor starter protectors/ circuit breakers		hp rating ¹⁾ for FLA ²⁾ max.		Rated current I_n A	Up to 240 V AC		Up to 480 V/277 V AC		Up to 600 V/347 V AC	
		Single- phase	Three- phase		UL I_{bc} ³⁾ kA	CSA I_{bc} ³⁾ kA	UL I_{bc} ³⁾ kA	CSA I_{bc} ³⁾ kA	UL I_{bc} ³⁾ kA	CSA I_{bc} ³⁾ kA
Type	V									
Size S00										
3RV2011 + 3RV2928-1H⁴⁾⁵⁾					0.16 ... 12.5 16	65 65	65 65	65 65	30 --	30 --
FLA ²⁾ max.	115/120	1	2							
16 A, 480 V	200/208	2	3							
12.5 A, 600 V	230/240	2	5							
	460/480	--	10							
	575/600	--	10							
Size S0										
3RV2021 + 3RV2928-1H⁴⁾⁵⁾					0.16 ... 12.5 16 ... 25 28; 32	65 65 50	65 65 50	65 65 50	30 -- --	30 -- --
FLA ²⁾ max.	115/120	2	5							
32 A, 480 V	200/208	3	10							
12.5 A, 600 V	230/240	5	10							
	460/480	--	20							
	575/600	--	--							
Size S2										
3RV2031+ 3RV2938-1K⁴⁾					14 ... 36 40 ... 52 59 ... 73	65 65 65	65 65 20	65 65 20	25 22 --	25 22 --
FLA ²⁾ max.	115/120	7 1/2	10							
73 A, 480 V	200/208	15	25							
52 A, 600 V	230/240	15	30							
	460/480	--	60							
	575/600	--	75							
Size S2, with increased switching capacity										
3RV2032 + 3RV2938-1K⁴⁾					14 ... 36 40 ... 52 59 ... 73	100 100 100	100 100 30	100 100 30	25 22 --	25 22 --
FLA ²⁾ max.	115/120	7 1/2	10							
73 A, 480 V	200/208	15	25							
52 A, 600 V	230/240	15	30							
	460/480	--	60							
	575/600	--	75							
Size S3										
3RV2041/2042 + 3RT2946-4GA07⁴⁾					40 ... 75 84 ... 100	65 65	65 65	65 65	30 --	30 --
FLA ²⁾ max.	115/120	7 1/2	15							
100 A, 480 V	200/208	15	30							
75 A, 600 V	230/240	20	40							
	460/480	--	75							
	575/600	--	75							

-- No approval

¹⁾ hp rating = Power rating in horse power (maximum motor rating).

²⁾ FLA = Full Load Amps/motor full load current.

³⁾ Corresponds to "short-circuit breaking capacity" according to UL/CSA.

⁴⁾ Not required for CSA.

⁵⁾ Alternatively phase barrier 3RV2928-1K can be used.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

3RV27 and 3RV28 motor starter protectors as "circuit breakers"

These motor starter protectors are approved as circuit breakers according to UL 489 and CSA C22.2 No. 5. They can be used therefore as upstream short-circuit protective devices for "Manual Motor Controllers" and "Manual Motor Controllers Suitable for Tap Conductor Protection in Group Installations".

3RV27 and 3RV28 motor starter protectors are approved as "circuit breakers" under the following file numbers:

- UL File No. E235044, CCN: DIVQ
- CSA Master Contract 165071, Product Class: 1432 01

Motor starter protectors/ circuit breakers	Rated current I_n Type	240 V AC		480 Y/277 V AC		480 V AC		600 Y/347 V AC		600 V AC	
		UL $I_{bc}^{1)}$	CSA $I_{bc}^{1)}$	UL $I_{bc}^{1)}$	CSA $I_{bc}^{1)}$	UL $I_{bc}^{1)}$	CSA $I_{bc}^{1)}$	UL $I_{bc}^{1)}$	CSA $I_{bc}^{1)}$	UL $I_{bc}^{1)}$	CSA $I_{bc}^{1)}$
		kA	kA	kA	kA	kA	kA	kA	kA	kA	kA
Size S00											
3RV2711	0.16 ... 12.5	65	65	65	65	--	--	10	10	--	--
	15	65	65	65	65	--	--	--	--	--	--
3RV2811	0.16 ... 12.5	65	65	65	65	--	--	10	10	--	--
	15	65	65	65	65	--	--	--	--	--	--
Size S0											
3RV2721	20; 22	50	50	50	50	--	--	--	--	--	--
3RV2821	20; 22	50	50	50	50	--	--	--	--	--	--
Size S3											
3RV2742	10; 15	65	65	65	65	65	65	20	20	20	20
	20 ... 30	65	65	65	65	65	65	20	20	--	--
	35 ... 60	65	65	65	65	--	--	20	20	--	--
	70	65	65	65	65	--	--	10	10	--	--

-- No approval

¹⁾ Corresponds to "short-circuit breaking capacity" according to UL.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data


General data							
Type			3RV2.1.	3RV2.2.	3RV2.3.	3RV2.4.	3RV27, 3RV28
Size			S00	S0	S2	S3	S00, S0
Dimensions (W x H x D)							
• Screw terminals			45 x 97 x 92	45 x 97 x 92	55 x 140 x 149	70 x 165 x 169	45 x 144 x 92
• Spring-loaded terminals			45 x 106 x 92	45 x 119 x 92	--	--	--
Standards							
• IEC/EN 60947-1 (VDE 0660 Part 100)			Yes				
• IEC/EN 60947-2 (VDE 0660 Part 101)			Yes				
• IEC/EN 60947-4-1 (VDE 0660 Part 102)			Yes				
• UL 508/UL 60947-4-1, CSA C22.2 No. 14/CSA C22.2 No. 60947-4-1			Yes				--
• UL 489, CSA C22.2 No. 5			--				Yes
Number of poles			3				
Max. rated current $I_{n \max}$ (= max. rated operational current I_e)	A		16	40	80	100	22
Permissible ambient temperature							
• Storage/transport		°C	-50 ... +80				
• Operation		°C	-20 ... +70				
	I_n : 0.16 ... 32 A	°C	(current reduction above +60 °C)	--			
	I_n : 36 ... 40 A	°C	--	-20 ... +40 (the devices must not be mounted side-by-side and they must not be assembled with link modules with contactors. A lateral clearance of 9 mm is required.)	--		
	I_n : 14 ... 80 A	°C	--		-20 ... +70 (current reduction above +60 °C)	--	
	I_n : 40 ... 100 A	°C	--		--	-20 ... +70 (current reduction above +60 °C)	--
Permissible rated current at inside temperature of control cabinet							
• +60 °C	%		100				
• +70 °C	%		87				
Permissible rated current at ambient temperature of enclosure (applies to motor starter protector/circuit breaker inside enclosure: S00/S0 ≤ 32 A, S2 ≤ 52 A)							
• +35 °C	%		100			--	
• +60 °C	%		--		--		
Rated operational voltage U_e							
• Acc. to IEC	V AC		690 (when a molded-plastic enclosure is used only 500 V)				
• Acc. to UL/CSA	V AC		600				
Rated frequency	Hz		50/60				
Rated insulation voltage U_i	V		690			1 000	690
Rated impulse withstand voltage U_{imp}	kV		6			8	6
Utilization category							
• IEC 60947-2 (motor starter protector/circuit breaker)	A		AC-3				
• IEC 60947-4-1 (motor starter)							
Trip class CLASS	Acc. to IEC 60947-4-1		10		10/20		--
Power loss P_v per motor starter protector							
dependent upon	I_n : 0.16 ... 0.63 A	W	5.5		--		5.5
rated current I_n	I_n : 0.8 ... 6.3 A	W	7.3		--		7.3
(upper setting range)	I_n : 8 ... 16 A	W	9.3		--		9.3
	I_n : 14 ... 16 A	W	--	9.3	12.5	--	9.3
	I_n : 17 ... 25 A	W	--	10.5	14.5	--	10.5
	I_n : 28 ... 32 A	W	--	13.3	18	--	
	I_n : 36 ... 40 A	W	--	16.3	20	--	
	I_n : 45 ... 52 A	W	--		24.5	--	
	I_n : 59 ... 65 A	W	--		26	--	
	I_n : 73 ... 80 A	W	--		29.5	--	
	I_n : 40 ... 50 A	W	--		--	27	--
	I_n : 63 ... 75 A	W	--		--	38	--
	I_n : 84 ... 93 A	W	--		--	39	--
	I_n : 100 A	W	--		--	44	--
Shock resistance	Acc. to IEC 60068-2-27	g/ms	25/11 (square and sine pulse)				


Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

General data (continued)					
Type					
Size		3RV2.1.	3RV2.2.	3RV2.3.	3RV2.4.
Dimensions (W x H x D)		S00	S0	S2	S3
• Screw terminals • Spring-loaded terminals		45 x 97 x 92 45 x 106 x 92	45 x 97 x 92 45 x 119 x 92	55 x 140 x 149 --	70 x 165 x 169 --
Degree of protection	Acc. to IEC 60529	IP20	- IP20 (front side) - Terminal IP00 (use additional terminal covers for higher degree of protection)		
Touch protection	Acc. to IEC 60529	Finger-safe	Finger-safe, for vertical contact from the front		
Temperature compensation	Acc. to IEC 60947-4-1 °C	-20 ... +60			
Phase failure sensitivity	Acc. to IEC 60947-4-1	Yes (not for 3RV23 motor starter protectors)	No		
Protection of motors in hazardous environments		Yes (only for 3RV20 motor starter protectors)	No		
• EC type-examination certificate number according to European Directive 2014/34/EU (ATEX)		DMT 02 ATEX F 001  II (2) GD	No		
• according to international standard IECEx		IECEx BVS14.0102 [Ex]	No		
Isolating function	Acc. to IEC 60947-2	Yes			
Main and EMERGENCY STOP switch characteristics (with corresponding accessories)	Acc. to EN 60204-1 VDE 0113	Yes			
Protective separation between main and auxiliary circuits required for PELV applications	Acc. to IEC 60947-1	Yes			
• Up to 400 V + 10% • Up to 415 V + 5% (higher voltages on request)		Yes			
Permissible mounting position		Any, acc. to IEC 60447 start command "I" right-hand side or top			
Mechanical endurance (operating cycles)		100 000	52 A: 50 000, 80 A: 20 000	25 000	100 000
Electrical endurance (operating cycles)		100 000	52 A: 50 000, 80 A: 20 000	25 000	100 000
Max. switching frequency per hour (motor starts)	1/h	15			

General data					
Type					
Size		3RV2742	3RV1611-0BD10¹⁾	3RV1011	
Dimensions (W x H x D)		S3	S00	S00	
		70 x 168 x 169	45 x 90 x 70	45 x 90 x 70	
Standards					
• IEC/EN 60947-1 (VDE 0660 Part 100)		Yes			
• IEC/EN 60947-2 (VDE 0660 Part 101)		Yes			
• UL 508/UL 60947-4-1, CSA C22.2 No. 14/CSA 60947-4-1		No	Yes		
• UL 489, CSA C22.2 No. 5		Yes	No		
Number of poles		3			
Max. rated current $I_{n \max}$ (= max. rated operational current I_B)	A	70	0.2	12	
Permissible ambient temperature					
• Storage/transport	°C	-50 ... +80			
• Operation	°C	-20 ... +70 (current reduction above +60 °C)			
Permissible rated current at inside temperature of control cabinet					
• +60 °C	%	100			
• +70 °C	%	87			
Permissible rated current at ambient temperature of enclosure (applies to motor starter protector/circuit breaker inside enclosure)					
• +35 °C	%	--		100	
• +60 °C	%	--		--	
Rated operational voltage U_e					
• Acc. to IEC	V AC	690 (with molded-plastic enclosure 500 V)			
• Acc. to UL/CSA	V AC	600			
Rated frequency	Hz	50/60			
Rated insulation voltage U_i	V	1 000	690		
Rated impulse withstand voltage U_{imp}	kV	8	6		
Utilization category					
• IEC 60947-2 (motor starter protector/circuit breaker)		A			
• IEC 60947-4-1 (motor starter)		AC-3			

¹⁾ "Technical specifications" for 3RV1611 voltage transformer circuit breakers, see page 7/25.


Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

General data (continued)

Type			3RV2742	3RV1611-0BD10 ¹⁾	3RV1011
Size			S3	S00	S00
Dimensions (W x H x D)		mm	70 x 168 x 169	45 x 90 x 70	45 x 90 x 70
Power loss P_v per motor starter protector	$I_n: 0.2 \text{ A}$	W	--	5	--
dependent upon rated current I_n	$I_n: 10 \text{ A}$	W	10	--	--
(upper setting range)	$I_n: 15 \dots 35 \text{ A}$	W	14	--	--
	$I_n: 40 \dots 70 \text{ A}$	W	23.5	--	--
$R_{\text{per conducting path}} = \frac{P}{I^2 \times 3}$	$I_n: \dots 1.25 \text{ A}$	W	--	--	5.5
	$I_n: 1.65 \dots 6.3 \text{ A}$	W	--	--	7.3
	$I_n: 8 \dots 12 \text{ A}$	W	--	--	9.3
Shock resistance	Acc. to IEC 60068-2-27	g/ms	25/11 (square and sine pulse)		
Degree of protection	Acc. to IEC 60529		- IP20 (front side) - Connecting terminal IP00	IP20	
Touch protection	Acc. to IEC 60529		Finger-safe, for vertical contact from the front	Finger-safe	
Temperature compensation	Acc. to IEC 60947-4-1	°C	-20 ... +60		
Phase failure sensitivity	Acc. to IEC 60947-4-1		No	Yes	
Explosion protection – Safe operation of motors with "increased safety" type of protection			No		Yes
EC type-examination certificate number according to directive 2014/34/EU (ATEX)					
Isolating function	Acc. to IEC 60947-2		Yes		
Main and EMERGENCY STOP switch characteristics	Acc. to EN 60204-1		Yes		
(with corresponding accessories)					
Protective separation between main and auxiliary circuits, required for PELV applications	Acc. to IEC 60947-1				
• Up to 400 V + 10%			Yes		
• Up to 415 V + 5% (higher voltages on request)			Yes		
Permissible mounting position			Any, acc. to IEC 60447 start command "I" right-hand side or top		
Mechanical endurance	Operating cycles		25 000	100 000	
Electrical endurance	Operating cycles		25 000	100 000	
Max. switching frequency per hour (motor starts)	1/h		15		

¹⁾ "Technical specifications" for 3RV1611 voltage transformer circuit breakers, see page 7/25.

Rated data of the auxiliary switches and signaling switches

		Lateral auxiliary switch with 1 NO + 1 NC, 2 NO, 2 NC, 2 NO + 2 NC	Signaling switch	Transverse auxiliary switch with 1 CO	1 NO + 1 NC, 2 NO
Max. rated voltage					
• Acc. to NEMA (UL)	V AC	600		250	
• Acc. to NEMA (CSA)	V AC	600		250	
Uninterrupted current	A	10		5	2.5
Switching capacity		1 NO + 1 NC, 2 NO, 2 NC: A600, Q300; 2 NO + 2 NC: A300, Q300	A600, Q300	B600, R300	C300, R300

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

Front transverse auxiliary switches			
		Switching capacity for different voltages	
		1 CO	1 NO + 1 NC, 2 NO
Rated operational current I_e			
• At AC-15, alternating voltage	- 24 V	A 4	2
	- 230 V	A 3	0.5
• At AC-12 = I_{th} , alternating voltage	- 24 V	A 10	2.5
	- 230 V	A 10	2.5
• At DC-13, direct voltage L/R 200 ms	- 24 V	A 1	1
	- 48 V	A --	0.3
	- 60 V	A --	0.15
	- 110 V	A 0.22	--
	- 220 V	A 0.1	--
Minimum load capacity		V 17	
		mA 1	

Front transverse solid-state compatible auxiliary switches			
		Switching capacity for different voltages	
		1 CO	
Rated operational voltage U_e	Alternating voltage	V 125	
Rated operational current I_e /AC-14	At $U_e = 125$ V	A 0.1	
Rated operational voltage U_e	Direct voltage L/R 200 ms	V 60	
Rated operational current I_e /DC-13	At $U_e = 60$ V	A 0.3	
Minimum load capacity		V 5	
		mA 1	

Lateral auxiliary switches with signaling switch			
		Switching capacity for different voltages: Lateral auxiliary switch with 1 NO + 1 NC, 2 NO, 2 NC, 2 NO + 2 NC, Signaling switch	
Rated operational current I_e			
• At AC-15, alternating voltage	- 24 V	A	6
	- 230 V	A	4
	- 400 V	A	3
	- 690 V	A	1
• At AC-12 = I_{th} , alternating voltage	- 24 V	A	10
	- 230 V	A	10
	- 400 V	A	10
	- 690 V	A	10
• At DC-13, direct voltage L/R 200 ms	- 24 V	A	2
	- 110 V	A	0.5
	- 220 V	A	0.25
	- 440 V	A	0.1
Minimum load capacity		V	17
		mA	1

Auxiliary releases			
		Undervoltage releases	Shunt releases
Power consumption			
• During pick-up	- AC voltages	VA/W 20.2/13	13 ... 80
	- DC voltages	W 20	
• During uninterrupted duty	- AC voltages	VA/W 7.2/2.4	--
	- DC voltages	W 2.1	--
Response voltage			
• Tripping	V	0.35 ... 0.7 × U_s	0.7 ... 1.1 × U_s
• Pick-up	V	0.85 ... 1.1 × U_s	--
Opening time maximum	ms	20	

Short-circuit protection for auxiliary and control circuits			
Melting fuses operational class gG	A	10	
Miniature circuit breakers C characteristic	A	6 (prospective short-circuit current < 0.4 kA)	

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

Conductor cross-sections of main circuit						
Type		3RV2.11	3RV2.21	3RV2.31-4B.1., 3RV2.31-4D.1., 3RV2.31-4E.1., 3RV2.31-4P.1., 3RV2.31-4S.1., 3RV2.31-4T.1., 3RV2.31-4U.1., 3RV2.31-4V.1.	3RV2.31-4J.1., 3RV2.31-4K.1., 3RV2.31-4R.1., 3RV2.31-4W.1., 3RV2.31-4X.1., 3RV2431-4VA1., 3RV2.32	3RV27, 3RV28
Size		S00	S0	S2		S00, S0
Connection type		 Screw terminals				
Terminal screw		M3, Pozidriv size 2	M4, Pozidriv size 2	M6, Pozidriv size 2		M4, Pozidriv size 2
Operating devices		mm	∅ 5 ... 6	∅ 5 ... 6		∅ 5 ... 6
Prescribed tightening torque		Nm	0.8 ... 1.2	2 ... 2.5	3.0 ... 4.5	2.5 ... 3
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected						
• Solid or stranded	mm ²	2 x (0.75 ... 2.5) ¹⁾ , 2 x 4	2 x (1 ... 2.5) ¹⁾ , 2 x (2.5 ... 10) ¹⁾	2 x (1 ... 25) ¹⁾ , 1 x (1 ... 35) ¹⁾	2 x (1 ... 35) ¹⁾ , 1 x (1 ... 50) ¹⁾	2 x (1 ... 10) ¹⁾ , max. 1 x 25
• Finely stranded with end sleeve (DIN 46228)	mm ²	2 x (0.5 ... 1.5) ¹⁾ , 2 x (0.75 ... 2.5) ¹⁾	2 x (1 ... 2.5) ¹⁾ , 2 x (2.5 ... 6) ¹⁾ , 1 x 10	2 x (1 ... 16) ¹⁾ , 1 x (1 ... 25) ¹⁾	2 x (1 ... 25) ¹⁾ , 1 x (1 ... 35) ¹⁾	1 x (1 ... 16), max. 6 + 16
• AWG cables, solid or stranded	AWG	2 x (20 ... 16) ¹⁾ , 2 x (18 ... 12) ¹⁾	2 x (16 ... 12) ¹⁾ , 2 x (14 ... 8) ¹⁾	2 x (18 ... 3) ¹⁾ , 1 x (18 ... 2) ¹⁾	2 x (18 ... 2) ¹⁾ , 1 x (18 ... 1) ¹⁾	2 x (14 ... 10)
Connection type		 Spring-loaded terminals				
Operating devices		mm	3.0 x 0.5			
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected						
• Solid or stranded	mm ²	2 x (0.5 ... 4)	2 x (1 ... 10)	--		
• Finely stranded without end sleeve	mm ²	2 x (0.5 ... 2.5)	2 x (1 ... 6)	--		
• Finely stranded with end sleeve (DIN 46228)	mm ²	2 x (0.5 ... 2.5)	2 x (1 ... 6)	--		
• AWG cables, solid or stranded	AWG	2 x (20 ... 12)	2 x (18 ... 8)	--		
Max. external diameter of the conductor insulation		mm	3.6	6.4	--	

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.


Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

Conductor cross-sections of main circuit (continued)			
Type		3RV2.4/ 3RV2742	3RV1611-0BD10 ¹⁾ / 3RV1011
Size		S3	S00
Connection type		 Screw terminals with box terminal	 Screw terminals
Terminal screw		M6	Pozidriv size 2
Prescribed tightening torque	Nm	4.5 ... 6	0.8 ... 1.2
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected			
• Solid or stranded	mm ²	2 x (2.5 ... 16) ²⁾ , 2 x (10 ... 50) ²⁾ , 1 x (10 ... 70) ²⁾	2 x (0.5 ... 1.5) ²⁾ , 2 x (0.75 ... 2.5) ²⁾
• Finely stranded with end sleeve (DIN 46228)	mm ²	2 x (2.5 ... 35) ²⁾ , 1 x (2.5 ... 50) ²⁾	2 x (0.5 ... 1.5) ²⁾ , 2 x (0.75 ... 2.5) ²⁾
• AWG cables, solid or stranded	AWG	2 x (10 ... 1/0) ²⁾ , 1 x (10 ... 2/0) ²⁾	2 x (18 ... 14)
Ribbon cable conductors (number x width x thickness)	mm	2 x (6 x 9 x 0.8)	--
Removable box terminals³⁾			
• With copper bars ⁴⁾	mm	2 x 12 x 4	--
• With cable lugs ⁵⁾			
- Terminal screw		M6	
- Prescribed tightening torque	Nm	4.5 ... 6	
- Usable ring terminal lugs	mm	d ₂ = min. 6.3 d ₃ = max. 19	



¹⁾ "Technical specifications" for 3RV16 voltage transformer circuit breakers, see page 7/25.

²⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.

³⁾ Cable lug and busbar connection possible after removing the box terminals. This does not apply for 3RV2742.

⁴⁾ If bars larger than 12 mm x 10 mm are connected, a 3RT2946-4EA2 cover is needed to maintain the required phase clearance, see page 7/54.

⁵⁾ If conductors larger than 25 mm² are connected, the 3RT2946-4EA2 cover is needed to maintain the required phase clearance, see page 7/54.

Conductor cross-sections for auxiliary and control circuits							
Type		3RV2.11	3RV1011/ 3RV1611- 0BD10 ¹⁾	3RV2.21	3RV2.3	3RV2.4	3RV27, 3RV28
Size		S00		S0	S2	S3	S00, S0, S3
Connection type		 Screw terminals					
Terminal screw		M3, Pozidriv size 2					
Operating devices	mm	ø 5 ... 6					
Prescribed tightening torque	Nm	0.8 ... 1.2					
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected							
• Solid or stranded	mm ²	2 x (0.5 ... 1.5) ²⁾ , 2 x (0.75 ... 2.5) ²⁾					
• Finely stranded with end sleeve (DIN 46228)	mm ²	2 x (0.5 ... 1.5) ²⁾ , 2 x (0.75 ... 2.5) ²⁾					
• AWG cables, solid or stranded	AWG	2 x (18 ... 14) ²⁾ , 2 x (20 ... 16) ²⁾					
Connection type		 Spring-loaded terminals					
Operating devices	mm	3.0 x 0.5					
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected							
• Solid or stranded	mm ²	2 x (0.5 ... 2.5)					
• Finely stranded without end sleeve	mm ²	2 x (0.5 ... 2.5)					
• Finely stranded with end sleeve (DIN 46228)	mm ²	2 x (0.5 ... 1.5)					
• AWG cables, solid or stranded	AWG	2 x (20 ... 14)					
Max. external diameter of the conductor insulation	mm	3.6					

¹⁾ *Technical specifications* for 3RV16 voltage transformer circuit breakers, see page 7/25.

²⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.

¹⁾ "Technical specifications" for 3RV16 voltage transformer circuit breakers, see page 7/25.

²⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.


Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

Voltage transformer circuit breakers

General data				
Type		3RV1611-1AG14	3RV1611-1CG14	3RV1611-1DG14
Size		S00	S00	S00
Dimensions (W x H x D)		45 x 90 x 70	45 x 90 x 70	45 x 90 x 70
		mm		
Rated current I_n	A	1.4	2.5	3
Ambient temperature				
• During storage/transport	°C	-50 ... +80		
• During operation	°C	-20 ... +60 (up to +70 °C possible with current reduction)		
Rated operational voltage U_e	V	400		
Rated frequency	Hz	16.66 ... 60		
Rated insulation voltage U_i	V	690		
Short-circuit breaking capacity I_{cu} at 400 V AC	kA	50		
Set value of the thermal overload release	A	1.4	2.5	3
Response value of the instantaneous electronic release	A	6 ± 20%	10.5 ± 20%	20 ± 20%
Tripping time of the instantaneous electronic release	ms	Approx. 6 at 12 A	Approx. 6 at 20 A	Approx. 6 at 40 A
Internal resistance				
• In cold state	Ω	> 0.25 ± 6.5%		
• In heated state	Ω	> 0.30 ± 6.5%		
Shock resistance acc. to IEC 60068-2-27	g/ms	15		
Degree of protection acc. to IEC 60529		IP20		
Touch protection acc. to IEC 60529		Finger-safe for vertical contact from the front		
Endurance				
• Mechanical	Operating cycles	10 000		
• Electrical	Operating cycles	10 000		
Permissible mounting position		Any		

Type			3RV1611-1AG14	3RV1611-1CG14	3RV1611-1DG14
Conductor cross-sections, main circuit, 1 or 2 conductors					
Connection type			 Screw terminals		
Terminal screw			Pozidriv size 2		
Conductor cross-sections (min./max.), 1 or 2 conductors can be connected			2 x (0.5 ... 1.5) ¹⁾ , 2 x (0.75 ... 2.5) ¹⁾ , 2 x (1 ... 4) 2 x (0.5 ... 1.5) ¹⁾ , 2 x (0.75 ... 2.5) ¹⁾		
• Solid or stranded	mm ²				
• Finely stranded with end sleeve (DIN 46228)	mm ²				
Auxiliary switches for blocking the distance protection					
With defined lateral assignment for blocking distance protection			1 CO (for use as 1 NO or 1 NC)		
Rated operational voltage U_e	Alternating voltage	V	125		
Rated operational current I_e /AC-14	At U_e = 125 V	A	0.1		
Rated operational voltage U_e	Direct voltage L/R 200 ms	V	60		
Rated operational current I_e /DC-13	At U_e = 60 V	A	0.3		
Minimum load capacity		V	5		
		mA	1		
Short-circuit protection for auxiliary circuit					
Melting fuse		A	250 V type FF 2A (prospective short-circuit current < 1.1 kA)		

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

Terminals for "Self-Protected Combination Motor Controllers (Type E) according to UL 508/UL 60947-4-1"

Type		3RV2928-1H
Prescribed tightening torque	Nm	2.5 ... 3
Conductor cross-sections		
Front clamping point connected		
		
- Solid	mm ²	1 ... 10
- Finely stranded with end sleeve	mm ²	1 ... 16
- Stranded	mm ²	2.5 ... 25
- AWG cables, solid or stranded	AWG	14 ... 3
- Terminal screw		M4
Rear clamping point connected		
		
- Solid	mm ²	1 ... 10
- Finely stranded with end sleeve	mm ²	1 ... 16
- Stranded	mm ²	1.5 ... 25
- AWG cables, solid or stranded	AWG	14 ... 6
- Terminal screw		M4
Both clamping points connected		
		
- Front clamping point:		
- Solid	mm ²	1 ... 10
- Finely stranded with end sleeve	mm ²	1 ... 10 ¹⁾ , 1 ... 6 ¹⁾
- Stranded	mm ²	2.5 ... 10
- AWG cables, solid or stranded	AWG	14 ... 6
- Terminal screw		M4
- Rear clamping point:		
- Solid	mm ²	1 ... 10
- Finely stranded with end sleeve	mm ²	1 ... 10 ¹⁾ , 1 ... 16 ¹⁾
- Stranded	mm ²	2.5 ... 10
- AWG cables, solid or stranded	AWG	16 ... 3
- Terminal screw		M4

¹⁾ The following connections are possible when both clamping points are connected:

- Front 1 to 10 mm² and rear 1 to 10 mm²,
- Front 1 to 6 mm² and rear 1 to 16 mm².

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

General data

Connection module (plug and adapter) for motor starter protectors/circuit breakers with screw terminals		
Version	Type	
		3RT1900-4RE01 Motor feeder connector S0
		3RT1926-4RD01 Adapter S0
General data		
Rated insulation voltage U_i (pollution degree 3)	V	690
Rated impulse withstand voltage U_{imp} (pollution degree 3)	kV	6
Rated operational voltage U_e	V	440
Rated frequency f For AC operation	Hz	50/60
Rated operational current I_e AC-3 at 400 V	A	25
Mechanical endurance	Operating cycles	10 million
Electrical endurance at I_e	Operating cycles	1 million
Protective separation according to IEC 60947-1 (pollution degree 3)	V	400
Permissible ambient temperature		
• During operation	°C	-25 ... +60
• During storage	°C	-50 ... +80
Degree of protection acc. to IEC 60529		IP20 (front side)
Conductor cross-sections		
Connection type		 Screw terminals
• Solid	mm ²	1 x (0.5 ... 6)
• Finely stranded without/with end sleeve	mm ²	1 x (0.5 ... 6)
• Stranded	mm ²	1 x (0.5 ... 6)
• AWG cables, solid or stranded	AWG	1 x (20 ... 10)
• Tightening torque	Nm	0.6 ... 0.8
• Corresponding opening tool		Cross-tip screwdriver PZ2
UL and UL rated data		
Rated operational voltage U_e	V	480
Rated insulation voltage U_i	V	600
Uninterrupted current, at 40 °C	A	25
Short-circuit protection ¹⁾		
• At 600 V	kA	5
• CLASS RK5 fuse	A	100
• Circuit breakers with overload protection acc. to UL 489	A	100
Combination Motor Controllers (Type E) according to UL 508		
At 480 V	Type	3RV202
	A	22
	kA	65
At 600 V	Type	3RV202
	A	22
	kA	10

¹⁾ For more information about short-circuit values, e.g. for protection against high short-circuit currents, see the UL reports of the individual devices, www.siemens.com/sirius/manuals.

Protection Equipment

Motor Starter Protectors/Circuit Breakers


SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

For motor protection **IE3/IE4 ready**

Selection and ordering data

CLASS 10, without auxiliary switches

PU (UNIT, SET, M) = 1
PS* = 1 unit
PG = 41E



3RV2011-0AA10



3RV2011-0EA20

Rated current	Suitable for three-phase motors ¹⁾ with P	Setting range for thermal overload release	Instantaneous electronic release	Short-circuit breaking capacity at 400 V AC	SD	Screw terminals	SD	Spring-loaded terminals
I_n			$I >$	I_{cu}		Article No.	Price per PU	Article No.
A	kW	A	A	kA	d			
Size S00								
0.16	0.04	0.11 ... 0.16	2.1	100	▶	3RV2011-0AA10	▶	3RV2011-0AA20
0.2	0.06	0.14 ... 0.2	2.6	100	▶	3RV2011-0BA10	▶	3RV2011-0BA20
0.25	0.06	0.18 ... 0.25	3.3	100	▶	3RV2011-0CA10	▶	3RV2011-0CA20
0.32	0.09	0.22 ... 0.32	4.2	100	▶	3RV2011-0DA10	▶	3RV2011-0DA20
0.4	0.09	0.28 ... 0.4	5.2	100	▶	3RV2011-0EA10	▶	3RV2011-0EA20
0.5	0.12	0.35 ... 0.5	6.5	100	▶	3RV2011-0FA10	▶	3RV2011-0FA20
0.63	0.18	0.45 ... 0.63	8.2	100	▶	3RV2011-0GA10	▶	3RV2011-0GA20
0.8	0.18	0.55 ... 0.8	10	100	▶	3RV2011-0HA10	▶	3RV2011-0HA20
1	0.25	0.7 ... 1	13	100	▶	3RV2011-0JA10	▶	3RV2011-0JA20
1.25	0.37	0.9 ... 1.25	16	100	▶	3RV2011-0KA10	▶	3RV2011-0KA20
1.6	0.55	1.1 ... 1.6	21	100	▶	3RV2011-1AA10	▶	3RV2011-1AA20
2	0.75	1.4 ... 2	26	100	▶	3RV2011-1BA10	▶	3RV2011-1BA20
2.5	0.75	1.8 ... 2.5	33	100	▶	3RV2011-1CA10	▶	3RV2011-1CA20
3.2	1.1	2.2 ... 3.2	42	100	▶	3RV2011-1DA10	▶	3RV2011-1DA20
4	1.5	2.8 ... 4	52	100	▶	3RV2011-1EA10	▶	3RV2011-1EA20
5	1.5	3.5 ... 5	65	100	▶	3RV2011-1FA10	▶	3RV2011-1FA20
6.3	2.2	4.5 ... 6.3	82	100	▶	3RV2011-1GA10	▶	3RV2011-1GA20
8	3	5.5 ... 8	104	100	▶	3RV2011-1HA10	▶	3RV2011-1HA20
10	4	7 ... 10	130	100	▶	3RV2011-1JA10	▶	3RV2011-1JA20
12.5	5.5	9 ... 12.5	163	100	▶	3RV2011-1KA10	▶	3RV2011-1KA20
16	7.5	10 ²⁾ ... 16	208	55	▶	3RV2011-4AA10	▶	3RV2011-4AA20

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ The setting range of the thermal overload releases has been extended.

Auxiliary switches and other accessories can be ordered separately (see "Accessories", page 7/44 onwards).

Protection Equipment

Motor Starter Protectors/Circuit Breakers


SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

IE3/IE4 ready

For motor protection

CLASS 10, without auxiliary switches

PU (UNIT, SET, M) = 1
 PS* = 1 unit
 PG = 41E



3RV2021-4AA10



3RV2021-4AA20

Rated current	Suitable for three-phase motors ¹⁾ with <i>P</i>	Setting range for thermal overload release	Instantaneous electronic release	Short-circuit breaking capacity at 400 V AC	SD	Screw terminals		SD	Spring-loaded terminals	
<i>I</i> _n				<i>I</i> _{cu}		Article No.	Price per PU		Article No.	Price per PU
A	kW	A	A	kA	d			d		
Size S0										
0.16	0.04	0.11 ... 0.16	2.1	100	6	3RV2021-0AA10			--	
0.2	0.06	0.14 ... 0.2	2.6	100	6	3RV2021-0BA10			--	
0.25	0.06	0.18 ... 0.25	3.3	100	6	3RV2021-0CA10			--	
0.32	0.09	0.22 ... 0.32	4.2	100	6	3RV2021-0DA10			--	
0.4	0.09	0.28 ... 0.4	5.2	100	6	3RV2021-0EA10			--	
0.5	0.12	0.35 ... 0.5	6.5	100	6	3RV2021-0FA10			--	
0.63	0.18	0.45 ... 0.63	8.2	100	2	3RV2021-0GA10		2	3RV2021-0GA20	
0.8	0.18	0.55 ... 0.8	10	100	2	3RV2021-0HA10		2	3RV2021-0HA20	
1	0.25	0.7 ... 1	13	100	2	3RV2021-0JA10		2	3RV2021-0JA20	
1.25	0.37	0.9 ... 1.25	16	100	2	3RV2021-0KA10		2	3RV2021-0KA20	
1.6	0.55	1.1 ... 1.6	21	100	2	3RV2021-1AA10		2	3RV2021-1AA20	
2	0.75	1.4 ... 2	26	100	2	3RV2021-1BA10		2	3RV2021-1BA20	
2.5	0.75	1.8 ... 2.5	33	100	2	3RV2021-1CA10		2	3RV2021-1CA20	
3.2	1.1	2.2 ... 3.2	42	100	2	3RV2021-1DA10		2	3RV2021-1DA20	
4	1.5	2.8 ... 4	52	100	2	3RV2021-1EA10		2	3RV2021-1EA20	
5	1.5	3.5 ... 5	65	100	2	3RV2021-1FA10		2	3RV2021-1FA20	
6.3	2.2	4.5 ... 6.3	82	100	2	3RV2021-1GA10		2	3RV2021-1GA20	
8	3	5.5 ... 8	104	100	2	3RV2021-1HA10		2	3RV2021-1HA20	
10	4	7 ... 10	130	100	2	3RV2021-1JA10		2	3RV2021-1JA20	
12.5	5.5	9 ... 12.5	163	100	2	3RV2021-1KA10		2	3RV2021-1KA20	
16	7.5	10 ²⁾ ... 16	208	55	▶	3RV2021-4AA10		▶	3RV2021-4AA20	
20	7.5	13 ²⁾ ... 20	260	55	▶	3RV2021-4BA10		▶	3RV2021-4BA20	
22	11	16 ²⁾ ... 22	286	55	▶	3RV2021-4CA10		▶	3RV2021-4CA20	
25	11	18 ²⁾ ... 25	325	55	▶	3RV2021-4DA10		▶	3RV2021-4DA20	
28	15	23 ... 28	364	55	▶	3RV2021-4NA10		▶	3RV2021-4NA20	
32 ³⁾	15	27 ... 32	400	55	▶	3RV2021-4EA10		▶	3RV2021-4EA20	
36 ⁴⁾	18.5	30 ... 36	432	20	▶	3RV2021-4PA10			--	
40 ⁴⁾	18.5	34 ... 40	480	20	▶	3RV2021-4FA10			--	

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ The setting range of the thermal overload releases has been extended.

³⁾ Suitable for use with IE3/IE4 motors up to a starting current of 256 A. For higher starting currents we recommend using 3RV2 motor starter protectors size S2.

⁴⁾ The devices must not be mounted side-by-side and they must not be assembled with link modules with contactors. A lateral clearance of 9 mm is required. For use with IE3/IE4 motors we recommend using 3RV2 motor starter protectors size S2.

Auxiliary switches and other accessories can be ordered separately (see "Accessories", page 7/44 onwards).


Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

For motor protection **IE3/IE4 ready**

CLASS 10, without auxiliary switches



3RV2031-4SA10



3RV2032-4RA10



3RV2042-4MA10

Rated current	Suitable for three-phase motors ¹⁾ with P	Setting range for thermal overload release	Instantaneous electronic release	Short-circuit breaking capacity at 400 V AC	SD	Screw terminals	PU (UNIT, SET, M)	PS*	PG
I_n				I_{cu}		Article No.	Price per PU		
A	kW	A	A	kA	d				
Size S2									
14	5.5	9.5 ... 14	208	65	▶	3RV2031-4SA10	1	1 unit	41E
17	7.5	12 ... 17	260	65	▶	3RV2031-4TA10	1	1 unit	41E
20	7.5	14 ... 20	260	65	▶	3RV2031-4BA10	1	1 unit	41E
25	11	18 ... 25	325	65	▶	3RV2031-4DA10	1	1 unit	41E
32	15	22 ... 32	416	65	▶	3RV2031-4EA10	1	1 unit	41E
36	18.5	28 ... 36	520	65	▶	3RV2031-4PA10	1	1 unit	41E
40	18.5	32 ... 40	585	65	▶	3RV2031-4UA10	1	1 unit	41E
45	22	35 ... 45	650	65	▶	3RV2031-4VA10	1	1 unit	41E
52	22	42 ... 52	741	65	▶	3RV2031-4WA10	1	1 unit	41E
59	30	49 ... 59	845	65	▶	3RV2031-4XA10	1	1 unit	41E
65	30	54 ... 65	845	65	▶	3RV2031-4JA10	1	1 unit	41E
73	37	62 ... 73	949	65	▶	3RV2031-4KA10	1	1 unit	41E
80 ²⁾	37	70 ... 80	1 040	65	▶	3RV2031-4RA10	1	1 unit	41E
Size S2, with increased switching capacity									
14	5.5	9.5 ... 14	208	100	▶	3RV2032-4SA10	1	1 unit	41E
17	7.5	12 ... 17	260	100	▶	3RV2032-4TA10	1	1 unit	41E
20	7.5	14 ... 20	260	100	▶	3RV2032-4BA10	1	1 unit	41E
25	11	18 ... 25	325	100	▶	3RV2032-4DA10	1	1 unit	41E
32	15	22 ... 32	416	100	▶	3RV2032-4EA10	1	1 unit	41E
36	18.5	28 ... 36	520	100	▶	3RV2032-4PA10	1	1 unit	41E
40	18.5	32 ... 40	585	100	▶	3RV2032-4UA10	1	1 unit	41E
45	22	35 ... 45	650	100	▶	3RV2032-4VA10	1	1 unit	41E
52	22	42 ... 52	741	100	▶	3RV2032-4WA10	1	1 unit	41E
59	30	49 ... 59	845	100	▶	3RV2032-4XA10	1	1 unit	41E
65	30	54 ... 65	845	100	▶	3RV2032-4JA10	1	1 unit	41E
73	37	62 ... 73	949	100	▶	3RV2032-4KA10	1	1 unit	41E
80 ²⁾	37	70 ... 80	1 040	100	▶	3RV2032-4RA10	1	1 unit	41E
Size S3									
40	18.5	28 ... 40	520	65	▶	3RV2041-4FA10	1	1 unit	41E
50	22	36 ... 50	650	65	▶	3RV2041-4HA10	1	1 unit	41E
63	30	45 ... 63	819	65	▶	3RV2041-4JA10	1	1 unit	41E
75	37	57 ... 75	975	65	▶	3RV2041-4KA10	1	1 unit	41E
84	45	65 ... 84	1 170	65	▶	3RV2041-4RA10	1	1 unit	41E
93	45	75 ... 93	1 300	65	▶	3RV2041-4YA10	1	1 unit	41E
100 ³⁾	45, 55	80 ... 100	1 300	65	▶	3RV2041-4MA10	1	1 unit	41E
Size S3, with increased switching capacity									
40	18.5	28 ... 40	520	100	▶	3RV2042-4FA10	1	1 unit	41E
50	22	36 ... 50	650	100	▶	3RV2042-4HA10	1	1 unit	41E
63	30	45 ... 63	819	100	▶	3RV2042-4JA10	1	1 unit	41E
75	37	57 ... 75	975	100	▶	3RV2042-4KA10	1	1 unit	41E
84	45	65 ... 84	1 170	100	▶	3RV2042-4RA10	1	1 unit	41E
93	45	75 ... 93	1 300	100	▶	3RV2042-4YA10	1	1 unit	41E
100 ³⁾	45, 55	80 ... 100	1 300	100	▶	3RV2042-4MA10	1	1 unit	41E

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ Suitable for use with IE3/IE4 motors up to a starting current of 720 A. For higher starting currents we recommend using 3RV2 motor starter protectors size S3.

³⁾ Suitable for use with IE3/IE4 motors up to a starting current of 780 A. For higher starting currents we recommend using 3VA circuit breakers (see Catalog LV 10).

Auxiliary switches and other accessories can be ordered separately (see "Accessories", page 7/44 onwards).


Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

IE3/IE4 ready**For motor protection****CLASS 10, with transverse auxiliary switch (1 NO + 1 NC)**

PU (UNIT, SET, M) = 1
 PS* = 1 unit
 PG = 41E



3RV2011-4AA15
with integrated transverse
auxiliary switch



3RV2011-0EA25
with integrated transverse
auxiliary switch



3RV2021-4AA15
with integrated transverse
auxiliary switch



3RV2021-4AA25
with integrated transverse
auxiliary switch

Rated current	Suitable for three-phase motors ¹⁾ with <i>P</i>	Setting range for thermal overload release	Instantaneous electronic release	Short-circuit breaking capacity at 400 V AC	SD	Screw terminals		SD	Spring-loaded terminals	
<i>I</i> _n				<i>I</i> _{cu}		Article No.	Price per PU		Article No.	Price per PU
A	kW	A	A	kA	d			d		
Size S00										
0.16	0.04	0.11 ... 0.16	2.1	100	▶	3RV2011-0AA15	▶		3RV2011-0AA25	
0.2	0.06	0.14 ... 0.2	2.6	100	▶	3RV2011-0BA15	▶		3RV2011-0BA25	
0.25	0.06	0.18 ... 0.25	3.3	100	▶	3RV2011-0CA15	▶		3RV2011-0CA25	
0.32	0.09	0.22 ... 0.32	4.2	100	▶	3RV2011-0DA15	▶		3RV2011-0DA25	
0.4	0.09	0.28 ... 0.4	5.2	100	▶	3RV2011-0EA15	▶		3RV2011-0EA25	
0.5	0.12	0.35 ... 0.5	6.5	100	▶	3RV2011-0FA15	▶		3RV2011-0FA25	
0.63	0.18	0.45 ... 0.63	8.2	100	▶	3RV2011-0GA15	▶		3RV2011-0GA25	
0.8	0.18	0.55 ... 0.8	10	100	▶	3RV2011-0HA15	▶		3RV2011-0HA25	
1	0.25	0.7 ... 1	13	100	▶	3RV2011-0JA15	▶		3RV2011-0JA25	
1.25	0.37	0.9 ... 1.25	16	100	▶	3RV2011-0KA15	▶		3RV2011-0KA25	
1.6	0.55	1.1 ... 1.6	21	100	▶	3RV2011-1AA15	▶		3RV2011-1AA25	
2	0.75	1.4 ... 2	26	100	▶	3RV2011-1BA15	▶		3RV2011-1BA25	
2.5	0.75	1.8 ... 2.5	33	100	▶	3RV2011-1CA15	▶		3RV2011-1CA25	
3.2	1.1	2.2 ... 3.2	42	100	▶	3RV2011-1DA15	▶		3RV2011-1DA25	
4	1.5	2.8 ... 4	52	100	▶	3RV2011-1EA15	▶		3RV2011-1EA25	
5	1.5	3.5 ... 5	65	100	▶	3RV2011-1FA15	▶		3RV2011-1FA25	
6.3	2.2	4.5 ... 6.3	82	100	▶	3RV2011-1GA15	▶		3RV2011-1GA25	
8	3	5.5 ... 8	104	100	▶	3RV2011-1HA15	▶		3RV2011-1HA25	
10	4	7 ... 10	130	100	▶	3RV2011-1JA15	▶		3RV2011-1JA25	
12.5	5.5	9 ... 12.5	163	100	▶	3RV2011-1KA15	▶		3RV2011-1KA25	
16	7.5	10 ²⁾ ... 16	208	55	▶	3RV2011-4AA15	▶		3RV2011-4AA25	
Size S0										
16	7.5	10 ²⁾ ... 16	208	55	▶	3RV2021-4AA15	▶		3RV2021-4AA25	
20	7.5	13 ²⁾ ... 20	260	55	▶	3RV2021-4BA15	▶		3RV2021-4BA25	
22	11	16 ²⁾ ... 22	286	55	▶	3RV2021-4CA15	▶		3RV2021-4CA25	
25	11	18 ²⁾ ... 25	325	55	▶	3RV2021-4DA15	▶		3RV2021-4DA25	
28	15	23 ... 28	364	55	▶	3RV2021-4NA15	▶		3RV2021-4NA25	
32 ³⁾	15	27 ... 32	400	55	▶	3RV2021-4EA15	▶		3RV2021-4EA25	
36 ⁴⁾	18.5	30 ... 36	432	20	▶	3RV2021-4PA15			--	
40 ⁴⁾	18.5	34 ... 40	480	20	▶	3RV2021-4FA15			--	

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ The setting range of the thermal overload releases has been extended.

³⁾ Suitable for use with IE3/IE4 motors up to a starting current of 256 A. For higher starting currents we recommend using 3RV2 motor starter protectors size S2.

⁴⁾ The devices must not be mounted side-by-side and they must not be assembled with link modules with contactors. A lateral clearance of 9 mm is required. For use with IE3/IE4 motors we recommend using 3RV2 motor starter protectors size S2.

Auxiliary switches and other accessories can be ordered separately (see "Accessories", page 7/44 onwards).


Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

For motor protection **IE3/IE4 ready**

CLASS 10, with integrated auxiliary switch (1 NO + 1 NC)



3RV2031-4SA15
With integrated
auxiliary switch



3RV2032-4SA15
With integrated
auxiliary switch



3RV2041-4FA15
With integrated
auxiliary switch

Rated current	Suitable for three-phase motors ¹⁾ with P	Setting range for thermal overload release	Instantaneous electronic release	Short-circuit breaking capacity at 400 V AC	SD	Screw terminals	PU (UNIT, SET, M)	PS*	PG
I_n				I_{cu}		Article No.	Price per PU		
A	kW	A	A	kA	d				
Size S2									
14	5.5	9.5 ... 14	208	65	5	3RV2031-4SA15	1	1 unit	41E
17	7.5	12 ... 17	260	65	5	3RV2031-4TA15	1	1 unit	41E
20	7.5	14 ... 20	260	65	5	3RV2031-4BA15	1	1 unit	41E
25	11	18 ... 25	325	65	5	3RV2031-4DA15	1	1 unit	41E
32	15	22 ... 32	416	65	▶	3RV2031-4EA15	1	1 unit	41E
36	18.5	28 ... 36	520	65	▶▶	3RV2031-4PA15	1	1 unit	41E
40	18.5	32 ... 40	585	65	▶▶▶	3RV2031-4UA15	1	1 unit	41E
45	22	35 ... 45	650	65	▶▶▶▶	3RV2031-4VA15	1	1 unit	41E
52	22	42 ... 52	741	65	▶▶▶▶▶	3RV2031-4WA15	1	1 unit	41E
59	30	49 ... 59	845	65	▶▶▶▶▶▶	3RV2031-4XA15	1	1 unit	41E
65	30	54 ... 65	845	65	▶▶▶▶▶▶▶	3RV2031-4JA15	1	1 unit	41E
73	37	62 ... 73	949	65	▶▶▶▶▶▶▶▶	3RV2031-4KA15	1	1 unit	41E
80 ²⁾	37	70 ... 80	1 040	65	▶▶▶▶▶▶▶▶▶	3RV2031-4RA15	1	1 unit	41E
Size S2, with increased switching capacity									
14	5.5	9.5 ... 14	208	10	5	3RV2032-4SA15	1	1 unit	41E
17	7.5	12 ... 17	260	100	5	3RV2032-4TA15	1	1 unit	41E
20	7.5	14 ... 20	260	100	5	3RV2032-4BA15	1	1 unit	41E
25	11	18 ... 25	325	100	5	3RV2032-4DA15	1	1 unit	41E
32	15	22 ... 32	416	100	5	3RV2032-4EA15	1	1 unit	41E
36	18.5	28 ... 36	520	100	5	3RV2032-4PA15	1	1 unit	41E
40	18.5	32 ... 40	585	100	5	3RV2032-4UA15	1	1 unit	41E
45	22	35 ... 45	650	100	5	3RV2032-4VA15	1	1 unit	41E
52	22	42 ... 52	741	100	5	3RV2032-4WA15	1	1 unit	41E
59	30	49 ... 59	845	100	5	3RV2032-4XA15	1	1 unit	41E
65	30	54 ... 65	845	100	5	3RV2032-4JA15	1	1 unit	41E
73	37	62 ... 73	949	100	5	3RV2032-4KA15	1	1 unit	41E
80 ²⁾	37	70 ... 80	1 040	100	5	3RV2032-4RA15	1	1 unit	41E
Size S3									
40	18.5	28 ... 40	520	65	5	3RV2041-4FA15	1	1 unit	41E
50	22	36 ... 50	650	65	5	3RV2041-4HA15	1	1 unit	41E
63	30	45 ... 63	819	65	2	3RV2041-4JA15	1	1 unit	41E
75	37	57 ... 75	975	65	5	3RV2041-4KA15	1	1 unit	41E
84	45	65 ... 84	1 170	65	X	3RV2041-4RA15	1	1 unit	41E
93	45	75 ... 93	1 300	65	2	3RV2041-4YA15	1	1 unit	41E
100 ³⁾	45, 55	80 ... 100	1 300	65	5	3RV2041-4MA15	1	1 unit	41E

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ Suitable for use with IE3/IE4 motors up to a starting current of 720 A. For higher starting currents we recommend using 3RV2 motor starter protectors size S3.


³⁾ Suitable for use with IE3/IE4 motors up to a starting current of 780 A. For higher starting currents we recommend using 3VA circuit breakers (see Catalog LV 10).

Auxiliary switches and other accessories can be ordered separately (see "Accessories", page 7/44 onwards).

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

IE3/IE4 ready**For motor protection****CLASS 20, without auxiliary switches**

3RV2031-4SB10



3RV2031-4WB10



3RV2042-4FB10



3RV2042-4KB10

Rated current	Suitable for three-phase motors ¹⁾ with P	Setting range for thermal overload release	Instantaneous electronic release	Short-circuit breaking capacity at 400 V AC	SD	Screw terminals	PU (UNIT, SET, M)	PS*	PG
I_n				I_{cu}		Article No.	Price per PU		
A	kW	A	A	kA	d				
Size S2									
14	5.5	9.5 ... 14	208	65	2	3RV2031-4SB10	1	1 unit	41E
17	7.5	12 ... 17	260	65	2	3RV2031-4TB10	1	1 unit	41E
20	7.5	14 ... 20	260	65	▶	3RV2031-4BB10	1	1 unit	41E
25	11	18 ... 25	325	65	▶	3RV2031-4DB10	1	1 unit	41E
32	15	22 ... 32	416	65	▶	3RV2031-4EB10	1	1 unit	41E
36	18.5	28 ... 36	520	65	▶	3RV2031-4PB10	1	1 unit	41E
40	18.5	32 ... 40	585	65	▶	3RV2031-4UB10	1	1 unit	41E
45	22	35 ... 45	650	65	▶	3RV2031-4VB10	1	1 unit	41E
52	22	42 ... 52	741	65	▶	3RV2031-4WB10	1	1 unit	41E
59	30	49 ... 59	845	65	▶	3RV2031-4XB10	1	1 unit	41E
65	30	54 ... 65	845	65	▶	3RV2031-4JB10	1	1 unit	41E
Size S3, with increased switching capacity									
40	18.5	28 ... 40	520	100	2	3RV2042-4FB10	1	1 unit	41E
50	22	36 ... 50	650	100	2	3RV2042-4HB10	1	1 unit	41E
63	30	45 ... 63	819	100	2	3RV2042-4JB10	1	1 unit	41E
75	37	57 ... 75	975	100	2	3RV2042-4KB10	1	1 unit	41E
84	45	65 ... 84	1 170	100	2	3RV2042-4RB10	1	1 unit	41E
93	45	75 ... 93	1 300	100	2	3RV2042-4YB10	1	1 unit	41E
100 ²⁾	45, 55	80 ... 100	1 300	100	2	3RV2042-4MB10	1	1 unit	41E

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ Suitable for use with IE3/IE4 motors up to a starting current of 780 A. For higher starting currents we recommend using 3VA circuit breakers (see Catalog LV 10).

Auxiliary switches and other accessories can be ordered separately (see "Accessories", page 7/44 onwards).


Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

For motor protection **IE3/IE4 ready**

CLASS 20, with integrated auxiliary switch (1 NO + 1 NC)



3RV2031-4SB15



3RV2031-4WB15

Rated current	Suitable for three-phase motors ¹⁾ with P	Setting range for thermal overload release	Instantaneous electronic release	Short-circuit breaking capacity at 400 V AC	SD	Screw terminals	PU (UNIT, SET, M)	PS*	PG
I_n				I_{cu}		Article No.	Price per PU		
A	kW	A	A	kA	d				
Size S2									
14	5.5	9.5 ... 14	208	65	5	3RV2031-4SB15	1	1 unit	41E
17	7.5	12 ... 17	260	65	5	3RV2031-4TB15	1	1 unit	41E
20	7.5	14 ... 20	260	65	5	3RV2031-4BB15	1	1 unit	41E
25	11	18 ... 25	325	65	5	3RV2031-4DB15	1	1 unit	41E
32	15	22 ... 32	416	65	5	3RV2031-4EB15	1	1 unit	41E
36	18.5	28 ... 36	520	65	5	3RV2031-4PB15	1	1 unit	41E
40	18.5	32 ... 40	585	65	5	3RV2031-4UB15	1	1 unit	41E
45	22	35 ... 45	650	65	5	3RV2031-4VB15	1	1 unit	41E
52	22	42 ... 52	741	65	5	3RV2031-4WB15	1	1 unit	41E
59	30	49 ... 59	845	65	5	3RV2031-4XB15	1	1 unit	41E
65	30	54 ... 65	845	65	▶	3RV2031-4JB15	1	1 unit	41E

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

Auxiliary switches and other accessories can be ordered separately (see "Accessories", page 7/44 onwards).


Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

IE3/IE4 ready

For motor protection with overload relay function

Selection and ordering data**CLASS 10, with overload relay function (Automatic RESET), without auxiliary switches**

3RV2111-4FA10



3RV2111-0BA10

Rated current	Suitable for three-phase motors ¹⁾ with P	Setting range for thermal overload release	Instantaneous electronic release	Short-circuit breaking capacity at 400 V AC	SD	Screw terminals	PU (UNIT, SET, M)	PS*	PG
I_n				I_{cu}		Article No.	Price per PU		
A	kW	A	A	kA	d				
Size S00²⁾									
0.16	0.04	0.11 ... 0.16	2.1	100	2	3RV2111-0AA10	1	1 unit	41E
0.2	0.06	0.14 ... 0.2	2.6	100	2	3RV2111-0BA10	1	1 unit	41E
0.25	0.06	0.18 ... 0.25	3.3	100	2	3RV2111-0CA10	1	1 unit	41E
0.32	0.09	0.22 ... 0.32	4.2	100	2	3RV2111-0DA10	1	1 unit	41E
0.4	0.09	0.28 ... 0.4	5.2	100	2	3RV2111-0EA10	1	1 unit	41E
0.5	0.12	0.35 ... 0.5	6.5	100	2	3RV2111-0FA10	1	1 unit	41E
0.63	0.18	0.45 ... 0.63	8.2	100	2	3RV2111-0GA10	1	1 unit	41E
0.8	0.18	0.55 ... 0.8	10	100	2	3RV2111-0HA10	1	1 unit	41E
1	0.25	0.7 ... 1	13	100	2	3RV2111-0JA10	1	1 unit	41E
1.25	0.37	0.9 ... 1.25	16	100	2	3RV2111-0KA10	1	1 unit	41E
1.6	0.55	1.1 ... 1.6	21	100	2	3RV2111-1AA10	1	1 unit	41E
2	0.75	1.4 ... 2	26	100	2	3RV2111-1BA10	1	1 unit	41E
2.5	0.75	1.8 ... 2.5	33	100	2	3RV2111-1CA10	1	1 unit	41E
3.2	1.1	2.2 ... 3.2	42	100	2	3RV2111-1DA10	1	1 unit	41E
4	1.5	2.8 ... 4	52	100	2	3RV2111-1EA10	1	1 unit	41E
5	1.5	3.5 ... 5	65	100	2	3RV2111-1FA10	1	1 unit	41E
6.3	2.2	4.5 ... 6.3	82	100	2	3RV2111-1GA10	1	1 unit	41E
8	3	5.5 ... 8	104	100	2	3RV2111-1HA10	1	1 unit	41E
10	4	7 ... 10	130	100	2	3RV2111-1JA10	1	1 unit	41E
12.5	5.5	9 ... 12.5	163	100	2	3RV2111-1KA10	1	1 unit	41E
16	7.5	10 ³⁾ ... 16	208	55	2	3RV2111-4AA10	1	1 unit	41E
Size S0²⁾									
16	7.5	10 ³⁾ ... 16	208	55	2	3RV2121-4AA10	1	1 unit	41E
20	7.5	13 ³⁾ ... 20	260	55	2	3RV2121-4BA10	1	1 unit	41E
22	11	16 ³⁾ ... 22	286	55	2	3RV2121-4CA10	1	1 unit	41E
25	11	18 ³⁾ ... 25	325	55	2	3RV2121-4DA10	1	1 unit	41E
28	15	23 ... 28	364	55	2	3RV2121-4NA10	1	1 unit	41E
32 ⁴⁾	15	27 ... 32	400	55	2	3RV2121-4EA10	1	1 unit	41E

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ Accessories for mounting on the right and 3RV2915 three-phase busbars cannot be used.

³⁾ The setting range of the thermal overload releases has been extended.

⁴⁾ Suitable for use with IE3/IE4 motors up to a starting current of 256 A. For higher starting currents we recommend using 3RV2 motor starter protectors size S2.

Auxiliary switches and other accessories can be ordered separately (see "Accessories", page 7/44 onwards).


Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

For motor protection with overload relay function

CLASS 10, with overload relay function (Automatic RESET), without auxiliary switches



3RV2131-4WB10



3RV2142-4FA10

Rated current	Suitable for three-phase motors ¹⁾ with P	Setting range for thermal overload release	Instantaneous electronic release	Short-circuit breaking capacity at 400 V AC	SD	Screw terminals	PU (UNIT, SET, M)	PS*	PG
I_n				I_{cu}		Article No.	Price per PU		
A	kW	A	A	kA	d				
Size S2²⁾									
14	5.5	9.5 ... 14	208	65	2	3RV2131-4SA10	1	1 unit	41E
17	7.5	12 ... 17	260	65	2	3RV2131-4TA10	1	1 unit	41E
20	7.5	14 ... 20	260	65	2	3RV2131-4BA10	1	1 unit	41E
25	11	18 ... 25	325	65	2	3RV2131-4DA10	1	1 unit	41E
32	15	22 ... 32	416	65	2	3RV2131-4EA10	1	1 unit	41E
36	18.5	28 ... 36	520	65	2	3RV2131-4PA10	1	1 unit	41E
40	18.5	32 ... 40	585	65	2	3RV2131-4UA10	1	1 unit	41E
45	22	35 ... 45	650	65	2	3RV2131-4VA10	1	1 unit	41E
52	32	42 ... 52	741	65	2	3RV2131-4WA10	1	1 unit	41E
59	30	49 ... 59	845	65	2	3RV2131-4XA10	1	1 unit	41E
65	30	54 ... 65	845	65	2	3RV2131-4JA10	1	1 unit	41E
73	37	62 ... 73	949	65	2	3RV2131-4KA10	1	1 unit	41E
80 ³⁾	37	70 ... 80	1 040	65	2	3RV2131-4RA10	1	1 unit	41E
Size S3, with increased switching capacity²⁾									
40	18.5	28 ... 40	520	100	2	3RV2142-4FA10	1	1 unit	41E
50	22	36 ... 50	650	100	2	3RV2142-4HA10	1	1 unit	41E
63	30	45 ... 63	819	100	2	3RV2142-4JA10	1	1 unit	41E
75	37	57 ... 75	975	100	2	3RV2142-4KA10	1	1 unit	41E
84	45	65 ... 84	1 170	100	2	3RV2142-4RA10	1	1 unit	41E
93	45	75 ... 93	1 300	100	2	3RV2142-4YA10	1	1 unit	41E
100 ⁴⁾	45, 55	80 ... 100	1 300	100	2	3RV2142-4MA10	1	1 unit	41E

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ Accessories for mounting on the right and 3RV2915 three-phase busbars cannot be used.

³⁾ Suitable for use with IE3/IE4 motors up to a starting current of 720 A. For higher starting currents we recommend using 3RV2 motor starter protectors size S3.

⁴⁾ Suitable for use with IE3/IE4 motors up to a starting current of 780 A. For higher starting currents we recommend using 3VA circuit breakers (see Catalog LV 10).

Auxiliary switches and other accessories can be ordered separately (see "Accessories", page 7/44 onwards).

Protection Equipment

Motor Starter Protectors/Circuit Breakers


SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

IE3/IE4 ready For starter combinations

Selection and ordering data

Without auxiliary switches

PU (UNIT, SET, M) = 1
 PS* = 1 unit
 PG = 41E



3RV2311-4AC10



3RV2311-0JC20



3RV2321-4AC10



3RV2321-4AC20



Rated current	Suitable for three-phase motors ¹⁾ with P	Thermal overload release ²⁾	Instantaneous electronic release	Short-circuit breaking capacity at 400 V AC	SD	Screw terminals	SD	Spring-loaded terminals
I_n			$I >$	I_{cu}		Article No.	Price per PU	Article No.
A	kW	A	A	kA	d			Price per PU
Size S00								
0.16	0.04	Without	2.1	100	5	3RV2311-0AC10	5	3RV2311-0AC20
0.2	0.06	Without	2.6	100	5	3RV2311-0BC10	5	3RV2311-0BC20
0.25	0.06	Without	3.3	100	5	3RV2311-0CC10	5	3RV2311-0CC20
0.32	0.09	Without	4.2	100	5	3RV2311-0DC10	5	3RV2311-0DC20
0.4	0.09	Without	5.2	100	5	3RV2311-0EC10	5	3RV2311-0EC20
0.5	0.12	Without	6.5	100	5	3RV2311-0FC10	5	3RV2311-0FC20
0.63	0.18	Without	8.2	100	5	3RV2311-0GC10	5	3RV2311-0GC20
0.8	0.18	Without	10	100	5	3RV2311-0HC10	5	3RV2311-0HC20
1	0.25	Without	13	100	2	3RV2311-0JC10	5	3RV2311-0JC20
1.25	0.37	Without	16	100	2	3RV2311-0KC10	5	3RV2311-0KC20
1.6	0.55	Without	21	100	2	3RV2311-1AC10	5	3RV2311-1AC20
2	0.75	Without	26	100	2	3RV2311-1BC10	5	3RV2311-1BC20
2.5	0.75	Without	33	100	2	3RV2311-1CC10	5	3RV2311-1CC20
3.2	1.1	Without	42	100	2	3RV2311-1DC10	5	3RV2311-1DC20
4	1.5	Without	52	100	2	3RV2311-1EC10	5	3RV2311-1EC20
5	1.5	Without	65	100	2	3RV2311-1FC10	5	3RV2311-1FC20
6.3	2.2	Without	82	100	2	3RV2311-1GC10	5	3RV2311-1GC20
8	3	Without	104	100	2	3RV2311-1HC10	2	3RV2311-1HC20
10	4	Without	130	100	2	3RV2311-1JC10	2	3RV2311-1JC20
12.5	5.5	Without	163	100	2	3RV2311-1KC10	2	3RV2311-1KC20
16	7.5	Without	208	55	2	3RV2311-4AC10	2	3RV2311-4AC20
Size S0								
1.6	0.55	Without	21	100	5	3RV2321-1AC10	5	3RV2321-1AC20
2	0.75	Without	26	100	5	3RV2321-1BC10	5	3RV2321-1BC20
2.5	0.75	Without	33	100	5	3RV2321-1CC10	5	3RV2321-1CC20
3.2	1.1	Without	42	100	5	3RV2321-1DC10	5	3RV2321-1DC20
4	1.5	Without	52	100	5	3RV2321-1EC10	5	3RV2321-1EC20
5	1.5	Without	65	100	5	3RV2321-1FC10	5	3RV2321-1FC20
6.3	2.2	Without	82	100	2	3RV2321-1GC10	5	3RV2321-1GC20
8	3	Without	104	100	2	3RV2321-1HC10	5	3RV2321-1HC20
10	4	Without	130	100	2	3RV2321-1JC10	5	3RV2321-1JC20
12.5	5.5	Without	163	100	2	3RV2321-1KC10	5	3RV2321-1KC20
16	7.5	Without	208	55	2	3RV2321-4AC10	2	3RV2321-4AC20
20	7.5	Without	260	55	2	3RV2321-4BC10	2	3RV2321-4BC20
22	11	Without	286	55	2	3RV2321-4CC10	5	3RV2321-4CC20
25	11	Without	325	55	2	3RV2321-4DC10	2	3RV2321-4DC20
28	15	Without	364	55	5	3RV2321-4NC10	5	3RV2321-4NC20
32 ³⁾	15	Without	400	55	2	3RV2321-4EC10	2	3RV2321-4EC20
36 ⁴⁾	18.5	Without	432	20	2	3RV2321-4PC10	--	--
40 ⁴⁾	18.5	Without	480	20	2	3RV2321-4FC10	--	--

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ For overload protection of the motors, appropriate overload relays must be used.

³⁾ Suitable for use with IE3/IE4 motors up to a starting current of 256 A. For higher starting currents we recommend using 3RV2 motor starter protectors size S2.

⁴⁾ The devices must not be mounted side-by-side and they must not be assembled with link modules with contactors. A lateral clearance of 9 mm is required. For use with IE3/IE4 motors we recommend using 3RV2 motor starter protectors size S2.

Auxiliary switches and other accessories can be ordered separately (see "Accessories", page 7/44 onwards).


Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

For starter combinations **IE3/IE4 ready**

Without auxiliary switches



3RV2331-4SC10



3RV2331-4WC10



3RV2332-4SC10



3RV2332-4WC10



3RV2341-4FC10

Rated current	Suitable for three-phase motors ¹⁾ with P	Thermal overload release ²⁾	Instantaneous electronic release	Short-circuit breaking capacity at 400 V AC	SD	Screw terminals	PU (UNIT, SET, M)	PS*	PG
I_n				I_{cu}		Article No.	Price per PU		
A	kW	A	A	kA	d				
Size S2									
14	5.5	Without	208	65	2	3RV2331-4SC10		1	1 unit 41E
17	7.5	Without	260	65	2	3RV2331-4TC10		1	1 unit 41E
20	7.5	Without	260	65	2	3RV2331-4BC10		1	1 unit 41E
25	11	Without	325	65	2	3RV2331-4DC10		1	1 unit 41E
32	15	Without	416	65	▶ 2	3RV2331-4EC10		1	1 unit 41E
36	18.5	Without	520	65	▶ 2	3RV2331-4PC10		1	1 unit 41E
40	18.5	Without	585	65	▶ 2	3RV2331-4UC10		1	1 unit 41E
45	22	Without	650	65	▶ 2	3RV2331-4VC10		1	1 unit 41E
52	22	Without	741	65	▶ 2	3RV2331-4WC10		1	1 unit 41E
59	30	Without	845	65	▶ 2	3RV2331-4XC10		1	1 unit 41E
65	30	Without	845	65	▶ 2	3RV2331-4JC10		1	1 unit 41E
73	37	Without	949	65	▶ 2	3RV2331-4KC10		1	1 unit 41E
80 ³⁾	37	Without	1 040	65	▶ 2	3RV2331-4RC10		1	1 unit 41E
Size S2, with increased switching capacity									
14	5.5	Without	208	100	2	3RV2332-4SC10		1	1 unit 41E
17	7.5	Without	260	100	2	3RV2332-4TC10		1	1 unit 41E
20	7.5	Without	260	100	2	3RV2332-4BC10		1	1 unit 41E
25	11	Without	325	100	2	3RV2332-4DC10		1	1 unit 41E
32	15	Without	416	100	2	3RV2332-4EC10		1	1 unit 41E
36	18.5	Without	520	100	2	3RV2332-4PC10		1	1 unit 41E
40	18.5	Without	585	100	2	3RV2332-4UC10		1	1 unit 41E
45	22	Without	650	100	2	3RV2332-4VC10		1	1 unit 41E
52	22	Without	741	100	2	3RV2332-4WC10		1	1 unit 41E
59	30	Without	845	100	2	3RV2332-4XC10		1	1 unit 41E
65	30	Without	845	100	2	3RV2332-4JC10		1	1 unit 41E
73	37	Without	949	100	2	3RV2332-4KC10		1	1 unit 41E
80 ³⁾	37	Without	1 040	100	2	3RV2332-4RC10		1	1 unit 41E
Size S3									
40	18.5	Without	520	65	2	3RV2341-4FC10		1	1 unit 41E
50	22	Without	650	65	2	3RV2341-4HC10		1	1 unit 41E
63	30	Without	819	65	2	3RV2341-4JC10		1	1 unit 41E
75	37	Without	975	65	2	3RV2341-4KC10		1	1 unit 41E
84	45	Without	1 170	65	2	3RV2341-4RC10		1	1 unit 41E
93	45	Without	1 300	65	2	3RV2341-4YC10		1	1 unit 41E
100 ⁴⁾	45, 55	Without	1 300	65	2	3RV2341-4MC10		1	1 unit 41E
Size S3, with increased switching capacity									
40	18.5	Without	520	100	2	3RV2342-4FC10		1	1 unit 41E
50	22	Without	650	100	2	3RV2342-4HC10		1	1 unit 41E
63	30	Without	819	100	2	3RV2342-4JC10		1	1 unit 41E
75	37	Without	975	100	2	3RV2342-4KC10		1	1 unit 41E
84	45	Without	1 170	100	2	3RV2342-4RC10		1	1 unit 41E
93	45	Without	1 300	100	2	3RV2342-4YC10		1	1 unit 41E
100 ⁴⁾	45, 55	Without	1 300	100	2	3RV2342-4MC10		1	1 unit 41E

¹⁾ Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be protected must be considered when selecting the units.

²⁾ For overload protection of the motors, appropriate overload relays must be used.

³⁾ Suitable for use with IE3/IE4 motors up to a starting current of 720 A. For higher starting currents we recommend using 3RV2 motor starter protectors size S3.

⁴⁾ Suitable for use with IE3/IE4 motors up to a starting current of 780 A. For higher starting currents we recommend using 3VA circuit breakers (see Catalog LV 10).

Auxiliary switches and other accessories can be ordered separately (see "Accessories", page 7/44 onwards).

Protection Equipment

Motor Starter Protectors/Circuit Breakers


SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

For transformer protection

Selection and ordering data**CLASS 10, without auxiliary switches**

Motor starter protectors for the protection of transformers with high inrush current

PU (UNIT, SET, M) = 1
 PS* = 1 unit
 PG = 41E



3RV2411-0AA10



3RV2411-0AA20



3RV2421-4AA10



3RV2421-4AA20

Rated current	Setting range for thermal overload release	Instantaneous electronic release	Short-circuit breaking capacity at 400 V AC	SD	Screw terminals	SD	Spring-loaded terminals
I_n		$I >$	I_{cu}	d	Article No.	Price per PU	Article No.
A	A	A	kA	d			Price per PU
Size S00							
0.16	0.11 ... 0.16	3.3	100	▶	3RV2411-0AA10	2	3RV2411-0AA20
0.2	0.14 ... 0.2	4.2	100	▶	3RV2411-0BA10	2	3RV2411-0BA20
0.25	0.18 ... 0.25	5.2	100	▶	3RV2411-0CA10	2	3RV2411-0CA20
0.32	0.22 ... 0.32	6.5	100	▶	3RV2411-0DA10	2	3RV2411-0DA20
0.4	0.28 ... 0.4	8.2	100	▶	3RV2411-0EA10	2	3RV2411-0EA20
0.5	0.35 ... 0.5	10	100	▶	3RV2411-0FA10	2	3RV2411-0FA20
0.63	0.45 ... 0.63	13	100	▶	3RV2411-0GA10	2	3RV2411-0GA20
0.8	0.55 ... 0.8	16	100	▶	3RV2411-0HA10	2	3RV2411-0HA20
1	0.7 ... 1	21	100	▶	3RV2411-0JA10	2	3RV2411-0JA20
1.25	0.9 ... 1.25	26	100	▶	3RV2411-0KA10	2	3RV2411-0KA20
1.6	1.1 ... 1.6	33	100	▶	3RV2411-1AA10	2	3RV2411-1AA20
2	1.4 ... 2	42	100	▶	3RV2411-1BA10	2	3RV2411-1BA20
2.5	1.8 ... 2.5	52	100	▶	3RV2411-1CA10	2	3RV2411-1CA20
3.2	2.2 ... 3.2	65	100	▶	3RV2411-1DA10	2	3RV2411-1DA20
4	2.8 ... 4	82	100	▶	3RV2411-1EA10	2	3RV2411-1EA20
5	3.5 ... 5	104	100	▶	3RV2411-1FA10	2	3RV2411-1FA20
6.3	4.5 ... 6.3	130	100	▶	3RV2411-1GA10	2	3RV2411-1GA20
8	5.5 ... 8	163	100	▶	3RV2411-1HA10	2	3RV2411-1HA20
10	7 ... 10	208	100	▶	3RV2411-1JA10	2	3RV2411-1JA20
12.5	9 ... 12.5	260	100	▶	3RV2411-1KA10	2	3RV2411-1KA20
16	10 ¹⁾ ... 16	286	55	▶	3RV2411-4AA10	2	3RV2411-4AA20
Size S0							
0.16	0.11 ... 0.16	3.3	100	6	3RV2421-0AA10		--
0.2	0.14 ... 0.2	4.2	100	6	3RV2421-0BA10		--
0.25	0.18 ... 0.25	5.2	100	6	3RV2421-0CA10		--
0.32	0.22 ... 0.32	6.5	100	6	3RV2421-0DA10		--
0.4	0.28 ... 0.4	8.2	100	6	3RV2421-0EA10		--
0.5	0.35 ... 0.5	10	100	6	3RV2421-0FA10		--
0.63	0.45 ... 0.63	13	100	6	3RV2421-0GA10		--
0.8	0.55 ... 0.8	16	100	6	3RV2421-0HA10		--
1	0.7 ... 1	21	100	6	3RV2421-0JA10		--
1.25	0.9 ... 1.25	26	100	6	3RV2421-0KA10		--
1.6	1.1 ... 1.6	33	100	6	3RV2421-1AA10		--
2	1.4 ... 2	42	100	6	3RV2421-1BA10		--
2.5	1.8 ... 2.5	52	100	6	3RV2421-1CA10		--
3.2	2.2 ... 3.2	65	100	6	3RV2421-1DA10		--
4	2.8 ... 4	82	100	6	3RV2421-1EA10		--
5	3.5 ... 5	104	100	6	3RV2421-1FA10		--
6.3	4.5 ... 6.3	130	100	6	3RV2421-1GA10		--
8	5.5 ... 8	163	100	6	3RV2421-1HA10		--
10	7 ... 10	208	100	6	3RV2421-1JA10		--
12.5	9 ... 12.5	260	100	6	3RV2421-1KA10		--
16	10 ¹⁾ ... 16	286	55	▶	3RV2421-4AA10	2	3RV2421-4AA20
20	13 ¹⁾ ... 20	325	55	▶	3RV2421-4BA10	▶	3RV2421-4BA20
22	16 ¹⁾ ... 22	364	55	▶	3RV2421-4CA10	▶	3RV2421-4CA20
25	18 ¹⁾ ... 25	400	55	▶	3RV2421-4DA10	2	3RV2421-4DA20

¹⁾ The setting range of the thermal overload releases has been extended.

Auxiliary switches and other accessories can be ordered separately (see "Accessories", page 7/44 onwards).

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

For transformer protection


CLASS 10, without auxiliary switches

Motor starter protectors for the protection of transformers with high inrush current

PU (UNIT, SET, M) = 1

PS* = 1 unit

PG = 41E



3RV2431-4WA10

Rated current	Setting range for thermal overload release	Instantaneous electronic release	Short-circuit breaking capacity at 400 V AC	SD	Screw terminals 		SD 	
I_n			I_{cu}		Article No.	Price per PU	Article No.	Price per PU
A	A	A	kA	d				
Size S2								
14	9.5 ... 14	328	65	2	3RV2431-4SA10		--	
17	12 ... 17	410	65	2	3RV2431-4TA10		--	
20	14 ... 20	410	65	2	3RV2431-4BA10		--	
25	18 ... 25	512	65	2	3RV2431-4DA10		--	
32	22 ... 32	656	65	▶ 2	3RV2431-4EA10		--	
36	28 ... 36	820	65	2	3RV2431-4PA10		--	
40	32 ... 40	820	65	2	3RV2431-4UA10		--	
45	35 ... 45	922	65	2	3RV2431-4VA10		--	
52	42 ... 52	1 025	65	2	3RV2431-4WA10		--	
59	49 ... 59	1 040	65	2	3RV2431-4XA10		--	
65	54 ... 65	1 040	65	2	3RV2431-4JA10		--	

Auxiliary switches and other accessories can be ordered separately (see "Accessories", page 7/44 onwards).

Protection Equipment

Motor Starter Protectors/Circuit Breakers


SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

For system protection according to UL 489/CSA C22.2 No. 5

Selection and ordering data

Without auxiliary switches

Circuit breakers for system protection and non-motor loads according to UL/CSA



3RV2711-0AD10



3RV2742-5FD10

Rated current ¹⁾ I_n ¹⁾ A	Thermal overload release (non-adjustable) A	Instantaneous electronic release A	Short-circuit breaking capacity at 480 Y/277 V AC ²⁾ kA	480 V AC kA	SD d	Screw terminals Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size S00										
0.16	0.16	2.1	65	--	5	3RV2711-0AD10		1	1 unit	41E
0.2	0.2	2.6	65	--	5	3RV2711-0BD10		1	1 unit	41E
0.25	0.25	3.3	65	--	5	3RV2711-0CD10		1	1 unit	41E
0.32	0.32	4.2	65	--	5	3RV2711-0DD10		1	1 unit	41E
0.4	0.4	5.2	65	--	5	3RV2711-0ED10		1	1 unit	41E
0.5	0.5	6.5	65	--	5	3RV2711-0FD10		1	1 unit	41E
0.63	0.63	8.2	65	--	5	3RV2711-0GD10		1	1 unit	41E
0.8	0.8	10	65	--	5	3RV2711-0HD10		1	1 unit	41E
1	1	13	65	--	2	3RV2711-0JD10		1	1 unit	41E
1.25	1.25	16	65	--	5	3RV2711-0KD10		1	1 unit	41E
1.6	1.6	21	65	--	2	3RV2711-1AD10		1	1 unit	41E
2	2	26	65	--	2	3RV2711-1BD10		1	1 unit	41E
2.5	2.5	33	65	--	2	3RV2711-1CD10		1	1 unit	41E
3.2	3.2	42	65	--	2	3RV2711-1DD10		1	1 unit	41E
4	4	52	65	--	2	3RV2711-1ED10		1	1 unit	41E
5	5	65	65	--	2	3RV2711-1FD10		1	1 unit	41E
6.3	6.3	82	65	--	2	3RV2711-1GD10		1	1 unit	41E
8	8	104	65	--	2	3RV2711-1HD10		1	1 unit	41E
10	10	130	65	--	2	3RV2711-1JD10		1	1 unit	41E
12.5	12.5	163	65	--	2	3RV2711-1KD10		1	1 unit	41E
15	15	208	65	--	2	3RV2711-4AD10		1	1 unit	41E
Size S0										
20	20	260	50	--	2	3RV2721-4BD10		1	1 unit	41E
22	22	286	50	--	2	3RV2721-4CD10		1	1 unit	41E
Size S3³⁾										
10	10	150	65	65	5	3RV2742-5AD10		1	1 unit	41E
15	15	225	65	65	5	3RV2742-5BD10		1	1 unit	41E
20	20	260	65	65	5	3RV2742-5CD10		1	1 unit	41E
25	25	325	65	65	5	3RV2742-5DD10		1	1 unit	41E
30	30	390	65	65	5	3RV2742-5ED10		1	1 unit	41E
35	35	455	65	--	5	3RV2742-5FD10		1	1 unit	41E
40	40	520	65	--	5	3RV2742-5GD10		1	1 unit	41E
45	45	585	65	--	5	3RV2742-5HD10		1	1 unit	41E
50	50	650	65	--	5	3RV2742-5JD10		1	1 unit	41E
60	60	780	65	--	5	3RV2742-5LD10		1	1 unit	41E
70	70	910	65	--	5	3RV2742-5QD10		1	1 unit	41E

¹⁾ Rated value 100% according to UL 489 and IEC 60947-2 ("100% rated breaker").

²⁾ Values for 600 Y/347 V AC, see page 7/18.

³⁾ Transverse auxiliary switches cannot be used for 3RV2742.

Lateral and transverse auxiliary switches can be ordered separately (see "Accessories" page 7/44 onwards).

Protection Equipment

Motor Starter Protectors/Circuit Breakers


SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

For transformer protection according to UL 489/CSA C22.2 No.5

Selection and ordering data

Without auxiliary switches

Circuit breakers for system and transformer protection according to UL/CSA, specially designed for transformers with high inrush current



3RV2811-0AD10

Rated current ¹⁾	Thermal overload release (non-adjustable)	Instantaneous electronic release	Short-circuit breaking capacity at 480 Y/277 V AC ²⁾	SD	Screw terminals	PU (UNIT, SET, M)	PS*	PG
I_n ¹⁾		$I >$	I_{bc}		Article No.	Price per PU		
A	A	A	kA	d				
Size S00								
0.16	0.16	3.3	65	5	3RV2811-0AD10	1	1 unit	41E
0.2	0.2	4.2	65	5	3RV2811-0BD10	1	1 unit	41E
0.25	0.25	5.2	65	5	3RV2811-0CD10	1	1 unit	41E
0.32	0.32	6.5	65	5	3RV2811-0DD10	1	1 unit	41E
0.4	0.4	8.2	65	5	3RV2811-0ED10	1	1 unit	41E
0.5	0.5	10	65	5	3RV2811-0FD10	1	1 unit	41E
0.63	0.63	13	65	5	3RV2811-0GD10	1	1 unit	41E
0.8	0.8	16	65	5	3RV2811-0HD10	1	1 unit	41E
1	1	21	65	2	3RV2811-0JD10	1	1 unit	41E
1.25	1.25	26	65	2	3RV2811-0KD10	1	1 unit	41E
1.6	1.6	33	65	2	3RV2811-1AD10	1	1 unit	41E
2	2	42	65	2	3RV2811-1BD10	1	1 unit	41E
2.5	2.5	52	65	2	3RV2811-1CD10	1	1 unit	41E
3.2	3.2	65	65	2	3RV2811-1DD10	1	1 unit	41E
4	4	82	65	2	3RV2811-1ED10	1	1 unit	41E
5	5	104	65	2	3RV2811-1FD10	1	1 unit	41E
6.3	6.3	130	65	2	3RV2811-1GD10	1	1 unit	41E
8	8	163	65	2	3RV2811-1HD10	1	1 unit	41E
10	10	208	65	2	3RV2811-1JD10	1	1 unit	41E
12.5	12.5	260	65	2	3RV2811-1KD10	1	1 unit	41E
15	15	286	65	2	3RV2811-4AD10	1	1 unit	41E
Size S0								
20	20	325	50	2	3RV2821-4BD10	1	1 unit	41E
22	22	364	50	5	3RV2821-4CD10	1	1 unit	41E

¹⁾ Rated value 100% according to UL 489 and IEC 60947-2 ("100% rated breaker").

²⁾ Values for 600 Y/347 V AC, see page 7/18.

Lateral and transverse auxiliary switches can be ordered separately (see "Accessories", page 7/44 onwards).

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Mountable accessories

Overview

Mounting location and function

The 3RV2 motor starter protectors/circuit breakers have three main contact elements. In order to achieve maximum flexibility, auxiliary switches, signaling switches, auxiliary releases and isolator modules can be supplied separately.

These components are easily fitted to the switches without the use of any tools according to requirements.

Overview graphic, [see page 7/7](#).

Front side

Notes:

- A maximum of four auxiliary contacts with auxiliary switches can be mounted on each motor starter protector/circuit breaker
- Transverse auxiliary switches cannot be used for circuit breaker 3RV2742 (size S3).

Transverse auxiliary switches, solid-state compatible transverse auxiliary switches

1 NO + 1 NC
or
2 NO
or
1 CO

An auxiliary switch can be inserted transversely on the front. The overall width of the motor starter protectors/circuit breakers remains unchanged.

Left-hand side

Notes:

- A maximum of four auxiliary contacts with auxiliary switches can be mounted on each motor starter protector/circuit breaker
- Lateral auxiliary switches (two contacts) and signaling switches can be mounted separately or together
- Signaling switches cannot be used for 3RV1011, 3RV27 and 3RV28 circuit breakers
- Only lateral auxiliary switches can be used for 3RV2742 (size S3)

Lateral auxiliary switches (2 contacts)

1 NO + 1 NC
or
2 NO
or
2 NC

One of the three lateral auxiliary switches can be mounted on the left side per motor starter protector/circuit breaker. The contacts of the auxiliary switch close and open together with the main contacts of the motor starter protector/circuit breaker.

The width of the lateral auxiliary switch with two contacts is 9 mm.

Lateral auxiliary switches (4 contacts)

2 NO + 2 NC

One lateral auxiliary switch with four contacts can be mounted on the left side per motor starter protector/circuit breaker. The contacts of the auxiliary switch close and open together with the main contacts of the motor starter protector/circuit breaker.

The width of the lateral auxiliary switch with four contacts is 18 mm.

Signaling switches

Tripping 1 NO + 1 NC
Short circuit 1 NO + 1 NC

One signaling switch can be mounted on the left side of each motor starter protector.

The signaling switch has two contact systems.

One contact system always signals tripping irrespective of whether this was caused by a short circuit, an overload or an auxiliary release. The other contact system only switches in the event of a short circuit. There is no signaling as a result of switching off with the actuator.

In order to be able to switch on the motor starter protector again after a short circuit, the signaling switch must be reset manually after the error cause has been eliminated.

The width of the signaling switch is 18 mm.

Right-hand side

Notes:

- One auxiliary release can be mounted per motor starter protector/circuit breaker
- Accessories cannot be mounted on the right-hand side of the 3RV21 motor starter protectors for motor protection with overload relay function

Auxiliary releases

Shunt releases

For remote-controlled tripping of the motor starter protector/circuit breaker. The release coil should only be energized for short periods (see circuit diagrams).

or

Undervoltage releases

Trips the motor starter protector/circuit breaker when the voltage is interrupted and prevents the motor from being restarted accidentally when the voltage is restored. Used for remote-controlled tripping of the motor starter protector/circuit breaker.

Particularly suitable for EMERGENCY STOP disconnection by way of corresponding EMERGENCY STOP pushbuttons according to EN 60204-1.

or

Undervoltage releases with leading auxiliary contacts
2 NO

Function and use as for the undervoltage release without leading auxiliary contacts, but with the following additional function: the auxiliary contacts will open in switch position OFF to deenergize the coil of the undervoltage release, thus interrupting energy consumption. In the "tripped" position, these auxiliary contacts are not guaranteed to open. The leading contacts permit the motor starter protector/circuit breaker to reclose.

The width of the auxiliary release is 18 mm.

Own version for 3RV1011

Top

Notes:

- Isolator modules cannot be used for 3RV1011, 3RV27 and 3RV28 circuit breakers
- Isolator module for size S2:
 - only with 3RV2 motor starter protectors/circuit breakers up to max. 65 A
 - not with the transverse auxiliary switch
- Terminal screws of the transverse auxiliary switch are covered by the isolator module; Recommendation: Lateral auxiliary switches should be used in combination with the isolator module, or the isolator module should not be mounted until the auxiliary switch has been wired up

Isolator modules

Isolator modules can be mounted to the upper connection side of the motor starter protectors.

The supply cable is connected to the motor starter protector through the isolator module.

The plug can only be unplugged when the motor starter protector is open and isolates all 3 poles of the motor starter protector from the network. The shock-protected isolation point is clearly visible and secured with a padlock to prevent reinsertion of the plug.

For a complete overview of which accessories can be used for the various motor starter protectors/circuit breakers, [see page 7/2](#).

Protection Equipment





Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Mountable accessories

Selection and ordering data

PU (UNIT, SET, M) = 1
 PS* = 1 unit (unless otherwise specified)
 PG = 41E

Version		For motor starter protectors/ circuit breakers	SD	Screw terminals		SD	Spring-loaded terminals	
				Article No.	Price per PU		Article No.	Price per PU
			Size	d			d	
Auxiliary switches ¹⁾								
	Transverse auxiliary switches For front mounting		S00 ... S3	▶	3RV2901-1D 3RV2901-1E 3RV2901-1F	▶	-- 3RV2901-2E 3RV2901-2F	
	1 CO 1 NO + 1 NC 2 NO			▶		▶		
				▶		▶		
	Solid-state compatible transverse auxiliary switches For mounting on the front, for operation in dusty atmosphere and in solid-state circuits with low operating currents		S00 ... S3	2	3RV2901-1G		--	
	Covers for transverse auxiliary switches (PS* = 10 units)		S00 ... S3	2		3RV2901-0H		--
		Lateral auxiliary switches For mounting on the left	S00 ... S3	▶	3RV2901-1A 3RV2901-1B 3RV2901-1C 3RV2901-1J	▶	3RV2901-2A 3RV2901-2B 3RV2901-2C --	
		1 NO + 1 NC		▶		▶		
		2 NO		▶		▶		
		2 NC		▶		▶		
		2 NO + 2 NC		2				
Signaling switches ²⁾								
		Signaling switches One signaling switch can be mounted on the left per motor starter protector. Separate tripped and short-circuit alarms, 1 NO + 1 NC each	S00 ⁴⁾ ... S3	▶	3RV2921-1M	▶	3RV2921-2M	
								
Isolator modules ²⁾								
		Isolator modules Visible isolating distance for isolating individual motor starter protectors from the network, lockable in disconnected position	S00 ⁴⁾ , S0 S2 ³⁾	▶	3RV2928-1A 3RV2938-1A		-- --	
				▶				

¹⁾ Each motor starter protector/circuit breaker can be fitted with one transverse and one lateral auxiliary switch. The lateral auxiliary switch with 2 NO + 2 NC is used without a transverse auxiliary switch.

²⁾ This accessory cannot be used for the 3RV27 and 3RV28 circuit breakers (sizes S00, S0, S3).

³⁾ The isolator module for size S2 can be used only with 3RV2 motor starter protectors/circuit breakers up to max. 65 A. Similarly, it cannot be used with the transverse auxiliary switch.

⁴⁾ Not for 3RV1011 motor starter protectors.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Mountable accessories

PU (UNIT, SET, M) = 1
 PS* = 1 unit
 PG = 41E



3RV2902-1AV0



3RV2902-2AV0



3RV2922-1CP0



3RV2902-2DB0

Rated control supply voltage U_s				For motor starter protectors/ circuit breakers	SD	Screw terminals			SD	Spring-loaded terminals		
AC 50 Hz	AC 60 Hz	AC 50/60 Hz	AC/DC 50/60 Hz, DC 5 s ON period ²⁾			DC	Article No.			Price per PU	d	
V	V	V	V	V	Size	d						
Auxiliary releases ³⁾												
Undervoltage releases												
--	--	--	--	24	S00 ... S3	2	3RV2902-1AB4			--		
24	24	--	--	--	S00 ... S3	2	3RV2902-1AB0			--		
110	120	--	--	--	S00 ... S3	2	3RV2902-1AF0			--		
--	208	--	--	--	S00 ... S3	2	3RV2902-1AM1			--		
230	240	--	--	--	S00 ... S3	▶	3RV2902-1AP0		▶	3RV2902-2AP0		
400	440	--	--	--	S00 ... S3	▶	3RV2902-1AV0		▶	3RV2902-2AV0		
415	480	--	--	--	S00 ... S3	2	3RV2902-1AV1			--		
500	600	--	--	--	S00 ... S3	2	3RV2902-1AS0			--		
Undervoltage releases with leading auxiliary contacts 2 NO												
24	24	--	--	--	S00 ⁴⁾ ... S3	5	3RV2922-1CB0			--		
230	240	--	--	--	S00 ⁴⁾ ... S3	2	3RV2922-1CP0		2	3RV2922-2CP0		
400	440	--	--	--	S00 ⁴⁾ ... S3	2	3RV2922-1CV0		2	3RV2922-2CV0		
415	480	--	--	--	S00 ⁴⁾ ... S3	2	3RV2922-1CV1		2	3RV2922-2CV1		
Shunt releases												
--	--	20 ... 24	20 ... 70	--	S00 ... S3	▶	3RV2902-1DB0		▶	3RV2902-2DB0		
--	--	90 ... 110	70 ... 190	--	S00 ... S3	2	3RV2902-1DF0		2	3RV2902-2DF0		
--	--	210 ... 240	190 ... 330	--	S00 ... S3	▶	3RV2902-1DP0		▶	3RV2902-2DP0		
--	--	350 ... 415	330 ... 500	--	S00 ... S3	2	3RV2902-1DV0			--		
--	--	500	500	--	S00 ... S3	2	3RV2902-1DS0			--		

¹⁾ The voltage range is valid for 100% (infinite) ON period. The response voltage lies at 0.9 of the lower limit of the voltage range.

²⁾ The voltage range is valid for 5 s ON period at AC 50/60 Hz and DC. The response voltage lies at 0.85 of the lower limit of the voltage range.

³⁾ One auxiliary release can be mounted on the right per motor starter protector/circuit breaker (does not apply to 3RV21 motor starter protectors with overload relay function).

⁴⁾ Not for 3RV1011 motor starter protectors.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Busbar accessories

Overview


Insulated three-phase busbar system

Three-phase busbar systems provide an easy, time-saving and clearly arranged means of feeding 3RV2 motor starter protectors/circuit breakers with screw terminals. Different versions are available for sizes S00 to S2 and can be used for the various different types of motor starter protectors/circuit breakers (size S0 up to 32 A).


The 3RV1915 and 3RV1935 three-phase busbar systems are generally unsuitable for the 3RV21 motor starter protectors for motor protection with overload relay function.

The busbars are suitable for between two and five motor starter protectors/circuit breakers. However, any kind of extension is possible by clamping the tags of an additional busbar (rotated by 180°) underneath the terminals of the respective last motor starter protector/circuit breaker.

A combination of motor starter protectors/circuit breakers of size S00 and S0 is possible. The motor starter protectors/circuit breakers are supplied by appropriate infeed terminals.

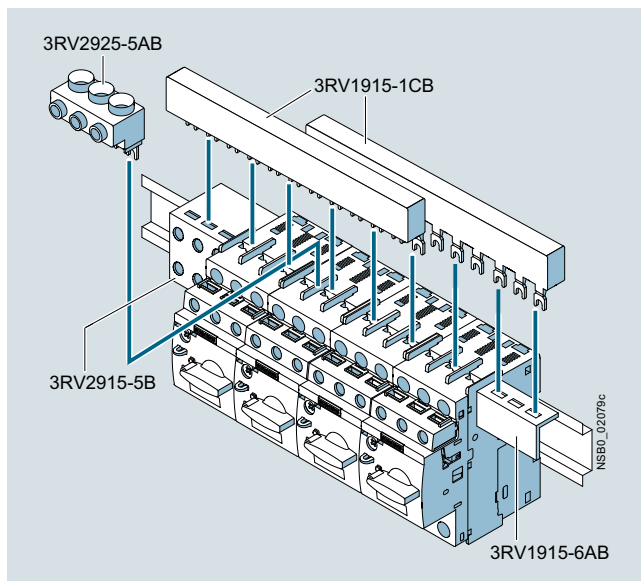

SIRIUS three-phase busbar system size S00/S0

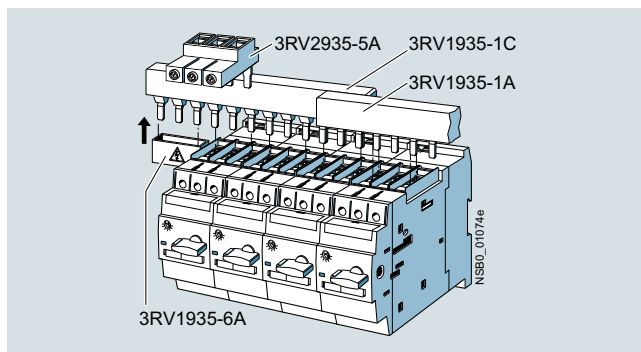

SIRIUS three-phase busbar system size S2

The three-phase busbar systems are finger-safe. They are designed for any short-circuit stress which can occur at the output side of connected motor starter protectors/circuit breakers.

The three-phase busbar systems can also be used to construct "Type E Starters" according to UL/CSA and for 3RV27 and 3RV28 circuit breakers according to UL 489. Special infeed terminals must be used for this purpose, however (S00/S0: 3RV2925-5EB; S2: 3RV2935-5E) (see "Selection and ordering data", page 7/48).


BUS busbar adapters for 60 mm systems

The motor starter protectors/circuit breakers are mounted directly with the aid of busbar adapters on busbar systems with 60 mm center-to-center clearance in order to save space and to reduce infeed times and costs.

Busbar adapters for busbar systems with 60 mm center-to-center clearance are suitable for copper busbars with a width of 12 mm to 30 mm. The busbars can be 5 mm or 10 mm thick.

The motor starter protectors/circuit breakers are snapped onto the adapter and connected on the line side. This prepared unit is then plugged directly onto the busbar system, and is thus connected both mechanically and electrically at the same time.

For further busbar adapters for snap-mounting direct-on-line starters and reversing starters as well as additional accessories such as line terminals and outgoing terminals, flat copper profile, etc., see Catalog LV 10.

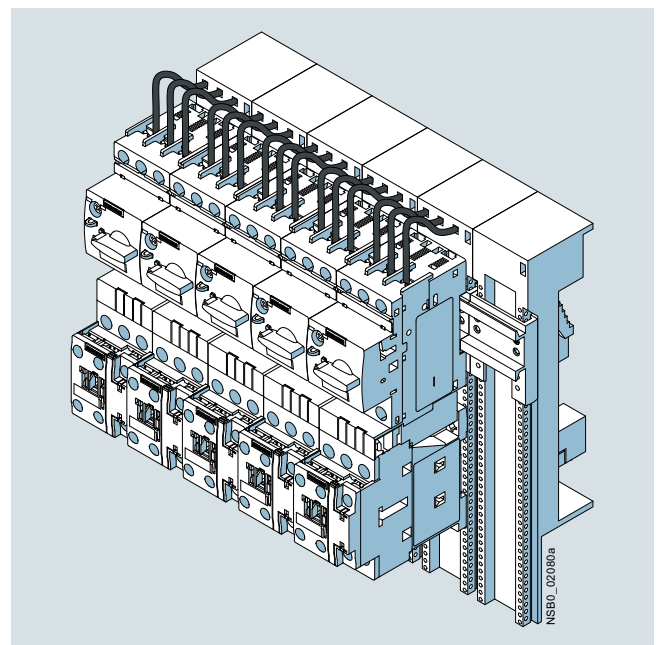

SIRIUS load feeders with busbar adapters snapped onto busbars

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Busbar accessories

Selection and ordering data

	Modular spacing	Number of motor starter protectors that can be connected			Rated current I_n at 690 V	For motor starter protectors/circuit breakers	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
		Without lateral accessories	With lateral auxiliary switch	Incl. auxiliary release								
	mm				A	Size	d					
Three-phase busbars¹⁾												
For feeding several motor starter protectors with screw terminals, mounted side by side on standard mounting rails, insulated, with touch protection												
 3RV1915-1AB	45 ³⁾	2	--	--	63	S00, S0 ²⁾	▶	3RV1915-1AB		1	1 unit	41E
		3	--	--	63	S00, S0 ²⁾	▶	3RV1915-1BB		1	1 unit	41E
		4	--	--	63	S00, S0 ²⁾	▶	3RV1915-1CB		1	1 unit	41E
		5	--	--	63	S00, S0 ²⁾	▶	3RV1915-1DB		1	1 unit	41E
 3RV1915-1BB	55 ⁴⁾	--	2	--	63	S00, S0 ²⁾	▶	3RV1915-2AB		1	1 unit	41E
		--	3	--	63	S00, S0 ²⁾	▶	3RV1915-2BB		1	1 unit	41E
		--	4	--	63	S00, S0 ²⁾	▶	3RV1915-2CB		1	1 unit	41E
		--	5	--	63	S00, S0 ²⁾	▶	3RV1915-2DB		1	1 unit	41E
 3RV1915-1CB		2	--	--	108	S2	▶	3RV1935-1A		1	1 unit	41E
		3	--	--	108	S2	▶	3RV1935-1B		1	1 unit	41E
		4	--	--	108	S2	▶	3RV1935-1C		1	1 unit	41E
 3RV1915-1DB	63 ⁵⁾	--	--	2	63	S00, S0 ²⁾	▶	3RV1915-3AB		1	1 unit	41E
		--	--	4	63	S00, S0 ²⁾	▶	3RV1915-3CB		1	1 unit	41E
	75 ⁵⁾	--	2	2	108	S2	▶	3RV1935-3A		1	1 unit	41E
		--	3	3	108	S2	▶	3RV1935-3B		1	1 unit	41E
		--	4	4	108	S2	▶	3RV1935-3C		1	1 unit	41E

¹⁾ Not suitable for 3RV21 motor starter protectors with overload relay function.

²⁾ Approved for motor starter protectors size S0 with $I_n \leq 32$ A.

³⁾ For 3RV2 motor starter protectors without accessories mounted on the side.

⁴⁾ For 3RV2 motor starter protectors with auxiliary switches with 1 NO + 1 NC, 2 NO and 2 NC mounted on the left (9 mm wide).

⁵⁾ For 3RV2 motor starter protectors with mounted accessories (18 mm wide). Auxiliary switches with 2 NO + 2 NC or signaling switch (mounted on the left) or with auxiliary release (mounted on the right).

Version	Modular spacing	For motor starter protectors/circuit breakers	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	mm	Size	d					

Connecting pieces for three-phase busbars

 3RV1915-5DB	For connecting three-phase busbars for 3RV2 motor starter protectors of size S00/S0 (left) to the 3RV1011 motor starter protector (right)			45	S00, S0	▶	3RV1915-5DB	1	1 unit	41E

Conductor cross-section			Tightening torque	For motor starter protectors/circuit breakers	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Solid or stranded	Finely stranded with end sleeve	AWG cables, solid or stranded								
mm ²	mm ²	AWG	Nm	Size	d					

Three-phase infeed terminals

Connection from top										
 3RV2925-5AB	2.5 ... 25	4 ... 16	10 ... 4	4	S00 ²⁾ , S0	▶	3RV1915-5A	1	1 unit	41E
	2.5 ... 25	2.5 ... 16	10 ... 4	3 ... 4	S00, S0	▶	3RV2925-5AB	1	1 unit	41E
	2 x (2.5 ... 50) ¹⁾ , 1 x (2.5 ... 70) ¹⁾	2 x (2.5 ... 35) ¹⁾ , 1 x (2.5 ... 50) ¹⁾	2 x (10 ... 1/0) ¹⁾ , 1 x (10 ... 2/0) ¹⁾	4 ... 6	S2	▶	3RV2935-5A	1	1 unit	41E
Connection from below										
Terminal is connected in place of a switch, take space requirement into account										
 3RV2915-5B	2.5 ... 25	2.5 ... 16	10 ... 4	Input: 4, output: 2 ... 2.5	S00, S0	▶	3RV2915-5B	1	1 unit	41E

¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.

²⁾ Especially suitable for 3RV1011 motor starter protectors. If the 3RV2 motor starter protector is used, the terminal block extends beyond the device width.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Busbar accessories

Conductor cross-section		Tightening torque	For motor starter protectors/circuit breakers	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Solid or stranded	Finely stranded with end sleeve								
mm²	mm²	AWG	Nm	Size	d				
Three-phase infeed terminals for constructing "Type E Starters"									
 3RV2925-5EB  3RV2935-5E									
Connection from top									
2.5 ... 25	2.5 ... 16	10 ... 4	3 ... 4	S00, S0	2	3RV2925-5EB 3RV2935-5E	1	1 unit	41E
2 x (2.5 ... 50) ¹⁾	2 x (2.5 ... 35) ¹⁾	2 x (10 ... 1/0) ¹⁾	4 ... 6	S2	►		1	1 unit	41E
1 x (2.5 ... 70) ¹⁾	1 x (2.5 ... 50) ¹⁾	1 x (10 ... 2/0) ¹⁾							
¹⁾ If two different conductor cross-sections are connected to one clamping point, both cross-sections must be in the range specified.									
Version			For motor starter protectors/circuit breakers	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
			Size	d					
Covers for connection tags									
 3RV1915-6AB			Touch protection for empty positions	S00, S0	►	3RV1915-6AB 3RV1935-6A	1	10 units	41E
				S2	►		1	5 units	41E

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Busbar accessories

Busbar adapters



8US1251-5DS10



8US1251-5DT11



8US1211-4TR00



8US1250-5AS10



8US1250-5AT10

For motor starter protectors/circuit breakers	Rated current	Connecting cable	Adapter length	Adapter width	Rated voltage	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size	A	AWG	mm	mm	V	d					

Busbar adapters for 60 mm systems

For copper busbars according to DIN 46433
Width: 12 mm and 30 mm
Thickness: 5 mm and 10 mm
and for T and double-T special profiles

- For motor starter protectors/circuit breakers with screw terminals

S00 ⁴⁾ , S0 ²⁾	25	12	200	45	690	2	8US1251-5DS10		1	1 unit	14O
S00 ⁴⁾ , S0	25	12	260	45	690	2	8US1251-5DT10		1	1 unit	14O
S0	32	10	200	45	690	3	8US1251-5NS10		1	1 unit	14O
S0 ²⁾	32	10	260	45	690	2	8US1251-5NT10		1	1 unit	14O
S2	80	4	200	55	690	5	8US1261-5MS13		1	1 unit	14O
S2	80	4	260	55	690	5	8US1261-6MT10		1	1 unit	14O
S2 ¹⁾	80	4	260	118	690	5	8US1211-6MT10		1	1 unit	14O
S3	100/70 ³⁾	4	215	72	690/600 ³⁾	2	8US1211-4TR00		1	1 unit	14O

- For motor starter protectors/circuit breakers with spring-loaded terminals

S00 ⁴⁾ , S0 ²⁾	25	12	200	45	690	2	8US1251-5DS11		1	1 unit	14O
S00 ⁴⁾ , S0 ²⁾	25	12	260	45	690	2	8US1251-5DT11		1	1 unit	14O
S0	32	10	200	45	690	5	8US1251-5NS11		1	1 unit	14O
S0 ²⁾	32	10	260	45	690	2	8US1251-5NT11		1	1 unit	14O

Accessories

Device holders	--	--	200	45	--	2	8US1250-5AS10		1	1 unit	14O
For lateral mounting to busbar adapters	--	--	260	45	--	2	8US1250-5AT10		1	1 unit	14O
Side modules	--	--	200	9	--	2	8US1998-2BJ10		1	10 units	14O
For widening of busbar adapters											
Vibration and shock kits											
For high vibration and shock loads											
S2	--	--	--	--	--	5	8US1998-1DA10		1	1 unit	14O

¹⁾ For the assembly of feeders for reversing starters comprising a motor starter protector and two contactors.

²⁾ Also approved for 3RV27, 3RV28 motor starter protectors according to UL.

³⁾ Values according to UL/CSA:
- Rated current: 70 A at 600 V AC
- Short-circuit breaking capacity:
480 V AC: 65 kA, up to $I_n = 30$ A,
480 Y/277 V AC: 65 kA
600 Y/347 V AC: 20 kA.

⁴⁾ Not for 3RV1011 motor starter protectors.

For additional busbar adapters and accessories, see [Catalog LV 10](#).

Protection Equipment

Motor Starter Protectors/Circuit Breakers


SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Rotary operating mechanisms


Overview

Door-coupling rotary operating mechanisms

Motor starter protectors/circuit breakers with a rotary operating mechanism can be mounted in a control cabinet and operated externally by means of a door-coupling rotary operating mechanism. When the cabinet door with motor starter protector/circuit breaker is closed, the operating mechanism is coupled. When the motor starter protector/circuit breaker closes, the coupling is locked which prevents the door from being opened unintentionally. This interlock can be defeated by the maintenance personnel. In the OPEN position, the rotary operating mechanism can be secured against reclosing with up to three padlocks. Inadvertent opening of the door is not possible in this case either.

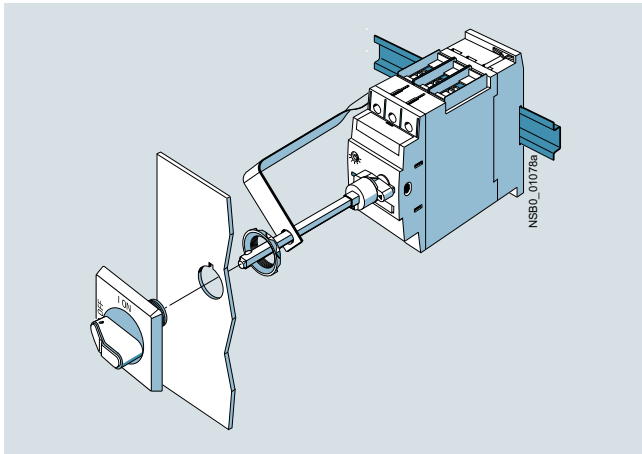

SIRIUS 3RV2926-0K door-coupling rotary operating mechanism

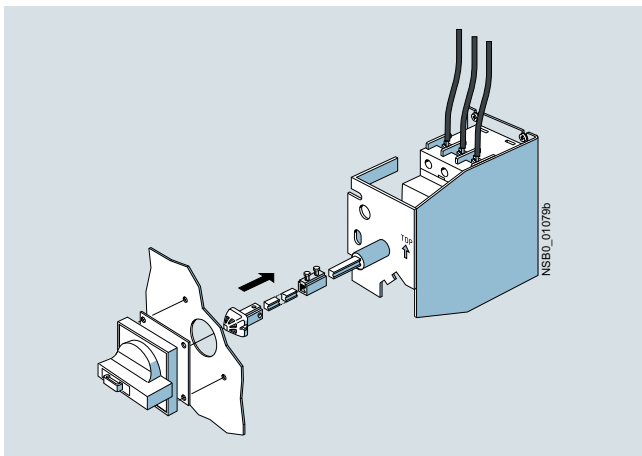

SIRIUS 3RV2926-2B door-coupling rotary operating mechanism for arduous conditions

Remote motorized operating mechanism

3RV motor starter protectors are manually operated switching devices. They automatically trip in case of an overload or short circuit. Intentional remote-controlled tripping is possible by means of a shunt release or an undervoltage release. Reclosing is only possible directly at the motor starter protector/circuit breaker.

The remote motorized operating mechanism allows the motor starter protectors/circuit breakers to be opened and closed by electrical commands. This enables a load or an installation to be isolated from the network or reconnected to it from an operator panel.


If the motor starter protector/circuit breaker is tripped as a result of overload or short circuit, it will be in the tripped position. For reclosing, the remote motorized operating mechanism must first be set manually or electrically to the 0 position (electrically by means of the Open command). Then it can be reclosed.

The remote motorized operating mechanism is available for motor starter protectors/circuit breakers in size S3 for the control voltages of 230 V AC. The motor starter protector/circuit breaker is fitted into the remote motorized operating mechanism as shown in the drawing.

In the "MANUAL" position, the motor starter protector/circuit breaker in the remote motorized operating mechanism can continue to be switched manually on site. In the "AUTOMATIC" position, the motor starter protector/circuit breaker is switched by means of electrical commands. The switching command must be applied for a minimum of 100 ms. The remote motorized operating mechanism closes the motor starter protector after a maximum of 1 s. On voltage failure during the switching operation it is ensured that the motor starter protector/circuit breaker remains in the "OPEN" or "CLOSED" position. In the "MANUAL" and "OFF" position, the remote motorized operating mechanism can be locked with a padlock.

RESET function

The RESET button on the motorized operating mechanism serves to reset any 3RV2921-1M signaling switch that might be installed.

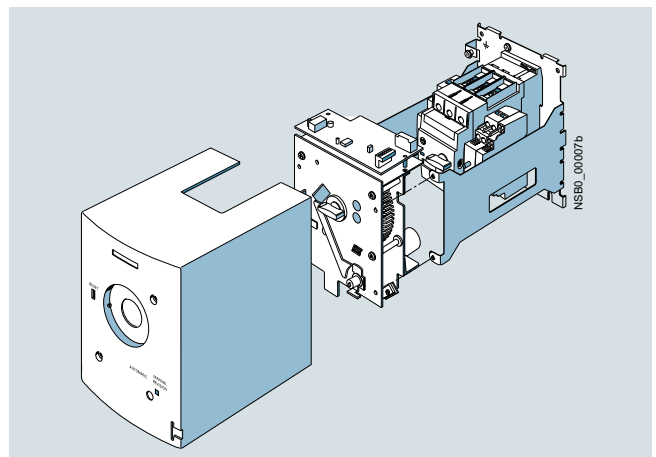

SIRIUS 3RV1946-3AP0 remote motorized operating mechanism

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Rotary operating mechanisms

Technical specifications

Remote motorized operating mechanisms		
Type		3RV1946-3AP0
Max. power consumption		
• At $U_s = 230$ V AC	VA	170
Operating range		0.85 ... 1.1 x U_s
Minimum command duration at U_s	s	0.1
Max. command duration		Unlimited (uninterrupted operation)
Max. total make/break time, remote-controlled	s	2
Ready to reclose after approx.	s	2.5
Switching frequency	1/h	25
Internal back-up fuse		
• 230 V AC	A	0.8
Connection type of control cables		Plug-in connectors with screw terminals
Shock resistance acc. to IEC 60068-2-27	g/ms	25/11 (square and sine pulse)

Selection and ordering data

Version	Color of actuator	Version of extension shaft	For motor starter protectors/circuit breakers	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
		mm	Size	d					

Door-coupling rotary operating mechanisms




3RV2926-0B

Door-coupling rotary operating mechanisms consisting of an actuator, a coupling driver and a 130/330 mm long extension shaft (6 mm x 6 mm)

Designed for degree of protection IP64; the door locking device prevents accidental opening of the control cabinet door when the switch is set to ON. The OFF position can be locked with up to three padlocks.

Door-coupling rotary operating mechanisms	Black	130	S00 ¹⁾ ... S3	▶	3RV2926-0B		1	1 unit	41E
		330	S00 ¹⁾ ... S3	▶	3RV2926-0K		1	1 unit	41E
EMERGENCY STOP door-coupling rotary operating mechanisms	Red/yellow	130	S00 ¹⁾ ... S3	▶	3RV2926-0C		1	1 unit	41E
		330	S00 ¹⁾ ... S3	▶	3RV2926-0L		1	1 unit	41E

Door-coupling rotary operating mechanisms for arduous conditions



3RV2926-2B

The door-coupling rotary operating mechanisms consist of an actuator, a coupling driver, an extension shaft of 300 mm in length (8 mm x 8 mm), a spacer and two metal brackets into which the motor starter protector/circuit breaker is inserted.

The door-coupling rotary operating mechanisms are designed to degree of protection IP65. The door interlocking reliably prevents opening of the control cabinet door in the ON position of the motor starter protector/circuit breaker. The OFF position can be locked with up to three padlocks.

Laterally mountable auxiliary releases and 2-pole auxiliary switches can be used.

The door-coupling rotary operating mechanisms thus meet the requirements for isolating functions according to IEC 60947-2.

Door-coupling rotary operating mechanisms	Gray	300	S00 ¹⁾ , S0	▶	3RV2926-2B		1	1 unit	41E
			S2	▶	3RV2936-2B		1	1 unit	41E
			S3	▶	3RV2946-2B		1	1 unit	41E
EMERGENCY STOP door-coupling rotary operating mechanisms	Red/yellow	300	S00 ¹⁾ , S0	▶	3RV2926-2C		1	1 unit	41E
			S2	2	3RV2936-2C		1	1 unit	41E
			S3	▶	3RV2946-2C		1	1 unit	41E

3RV2936-2C

¹⁾ Not for 3RV1011.

Version	Rated control supply voltage U_s	For motor starter protectors/circuit breakers	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
		Size						

Remote motorized operating mechanisms



3RV1946-3AP0

Remote motorized operating mechanisms	50/60 Hz, 230 V AC	S3	X	3RV1946-3AP0		1	1 unit	41E
--	--------------------	----	---	---------------------	--	---	--------	-----

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Mounting accessories

Overview

More information


System Manual "SIRIUS – System Overview", see
<https://support.industry.siemens.com/cs/ww/en/view/60311318>

Equipment Manual, see
<https://support.industry.siemens.com/cs/ww/en/view/60279172>


Accessories for "Self-Protected Combination Motor Controllers (Type E)" according to UL 508/UL 60947-4-1

The 3RV20 motor starter protectors with screw terminals are approved according to UL 508/UL 60947-4-1 as "Self-Protected Combination Motor Controllers (Type E)". The 3RV1011 motor starter protectors do not have this UL approval.


This requires increased clearance and creepage distance (1 inch and 2 inches respectively) at the input side of the device, which are achieved by mounting a terminal block or a phase barrier.

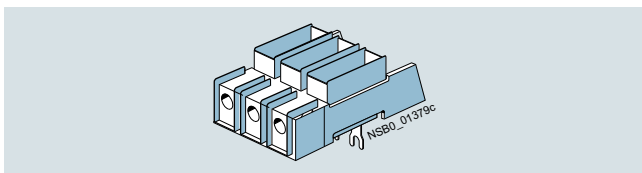

SIRIUS 3RV2928-1H terminal block

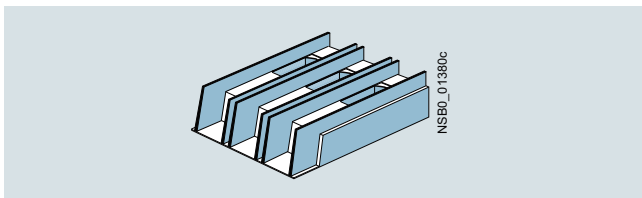

SIRIUS 3RT2946-4GA07 terminal block (type E)

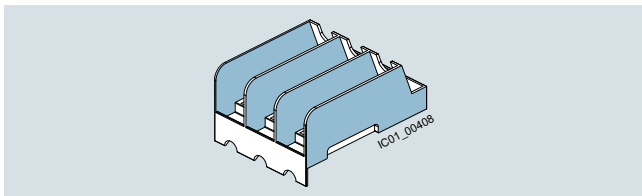

SIRIUS 3RV2928-1K phase barrier

Motor starter protectors/ circuit breakers	Size	Essential accessories for "Self-Protected Combination Motor Controllers (Type E)" acc. to UL 508/UL 60947-4-1
3RV201., 3RV202.	S00/S0	3RV2928-1H terminal block or 3RV2928-1K phase barrier
3RV2031-4B.1., 3RV2031-4D.1., 3RV2031-4E.1., 3RV2031-4P.1., 3RV2031-4S.1., 3RV2031-4T.1., 3RV2031-4U.1., 3RV2031-4V.1.	S2	--
3RV2031-4J.1., 3RV2031-4K.1., 3RV2031-4R.1., 3RV2031-4W.1., 3RV2031-4X.1., 3RV2032	S2	3RV2938-1K phase barrier
3RV204.	S3	3RT2946-4GA07 terminal block

-- No accessories needed

Special three-phase infeed terminals are required for constructing "Type E Starters" with an insulated three-phase busbar system (see "Busbar accessories", page 7/48).

The 3RV29 infeed system also enables the assembly of "Type E Starters", see page 7/62 onwards.

Note:

According to CSA, these terminal blocks and the phase barriers can be omitted when the device is used as a "Self-Protected Combination Motor Controller (Type E)".

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Mounting accessories

Link modules

Feeders can be easily assembled from single devices with the help of the link modules. The following table shows the different combination options for devices with screw or spring-loaded terminals.

Combination devices	3RV2 motor starter protectors/ circuit breakers Size	3RT2 contactors; 3RW30, 3RW40 soft starters; 3RF34 solid-state contactors Size	Link modules Screw terminals	Spring-loaded terminals
Link modules for connecting switching devices to 3RV2 motor starter protectors/circuit breakers¹⁾				
3RT2 contactors with AC or DC coil	S00	S00	3RA1921-1DA00	3RA2911-2AA00
	S0	S00		--
	S2	S2	3RA2931-1AA00	--
	S3 ²⁾	S3 ²⁾	3RA1941-1AA00	--
3RT2 contactors with AC coil	S00	S0	3RA2921-1AA00	--
	S0	S0		3RA2921-2AA00 ³⁾
3RT2 contactor with DC or AC/DC coil	S00	S0	3RA2921-1BA00	--
	S0	S0		3RA2921-2AA00
3RW30 soft starters	S00	S00	3RA2921-1BA00	3RA2911-2GA00
	S0	S00		--
3RW30/3RW40 soft starters	S00	S0	3RA2921-1BA00	--
	S0	S0		3RA2921-2GA00
	S2 ⁴⁾	S2 ⁴⁾	3RA2931-1AA00	--
	S3 ⁵⁾	S3 ⁵⁾	3RA1941-1AA00	--
3RF34 solid-state contactors	S00/S0	S00	3RA2921-1BA00	--
Hybrid link modules for connecting contactors with spring-loaded terminals to 3RV2 motor starter protectors/circuit breakers with screw terminals⁶⁾				
3RT2 contactors with AC or DC coil	S00	S00	3RA2911-2FA00	--
	S0	S0	3RA2921-2FA00	--

-- Version not possible

- ¹⁾ The link modules cannot be used for 3RV2.21-4PA1., 3RV2.21-4FA1., 3RV2.31-4K.1., 3RV2.31-4R.1., 3RV2.32-4K.1., 3RV2.32-4R.1., 3RV27, 3RV28 and 3RV1011 motor starter protectors/circuit breakers.
- ²⁾ To assemble the feeder between a motor starter protector and a contactor in size S3, the 3RA2942-1AA00 standard mounting rail adapter must be used.
- ³⁾ A spacer for height compensation on AC contactors, size S0, is optionally available, [see page 7/56](#).
- ⁴⁾ To assemble the feeder between a motor starter protector and a soft starter in size S2, the 3RA2932-1CA00 standard mounting rail adapter must be used.
- ⁵⁾ It is only permissible to assemble the feeder between the motor starter protector and the soft starter in size S3 on a mounting plate.
- ⁶⁾ The hybrid link modules for motor starter protector to contactor cannot be used for 3RV2.21-4PA1., 3RV2.21-4FA1., 3RV27 and 3RV28 motor starter protectors/circuit breakers. They are suitable only for constructing direct-on-line starters.

Notes:

- Link modules can be used in
 - Size S00: up to max. 16 A
 - Size S0: up to max. 32 A
 - Size S2: up to max. 65 A
- Hybrid link modules can be used in
 - Size S00: up to max. 16 A
 - Size S0: up to max. 32 A

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Mounting accessories

Selection and ordering data

Accessories

Version	For motor starter protectors/ circuit breakers	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size		d					
Covers							
 3RV2 (size S3) with 3RT1946-4EA1 (left)	Terminal covers For cable lug and busbar connection for maintaining the required voltage clearances and as touch protection if box terminal is removed (2 units can be mounted per motor starter protector/circuit breaker)	S3	5	3RT1946-4EA1	1	1 unit	41B
	Scale covers Sealable, for covering the set current scale	3RV20, 3RV21, 3RV24: S00 ... S3	▶	3RV2908-0P	100	10 units	41E
 3RV2908-0P	Covers for devices with screw terminals (box terminals) Additional touch protection to be fitted at the box terminals (two units required per device) Main current level	S2	▶	3RT2936-4EA2	1	1 unit	41B
		S3	▶	3RT2946-4EA2	1	1 unit	41B
 3RT2936-4EA2				Screw terminals 			
Fixing accessories							
 3RV2928-0B	Push-in lugs For screwing the motor starter protector/circuit breaker onto mounting plates Two units are required for each motor starter protector.	S00, S0	2	3RV2928-0B	100	10 units	41E
Tools for opening spring-loaded terminals							
 3RA2908-1A	Screwdrivers For all SIRIUS devices with spring-loaded terminals Length approx. 200 mm, 3.0 mm x 0.5 mm, titanium gray/black, partially insulated	S00 ... S3	2	Spring-loaded terminals  3RA2908-1A	1	1 unit	41B
Terminal covers for box terminals on 3RV2742 and Type E terminal block 3RT2946-4GA07							
 3RV2948-1LA00	Additional touch protection to be fitted at the box terminals 3RV2742 (two units required per device) and at Type E terminal block 3RT2946-4GA07 Main current level	S3	X	3RV2948-1LA00	1	1 unit	41B

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Mounting accessories

Version	For motor starter protectors/ circuit breakers	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	Size	d					


Terminal blocks and phase barriers for "Self-Protected Combination Motor Controllers (Type E)" according to UL 508/UL 60947-4-1




3RV2928-1H



3RT2946-4GA07



3RV2928-1K



3RV2938-1K

Note:

UL 508/UL 60947-4-1 approval demands 1-inch clearance and 2-inch creepage distance for "Self-Protected Combination Motor Controllers (Type E)". The following terminal blocks or phase barriers must be used for the 3RV20 motor starter protectors with screw terminals. 3RV20 motor starter protectors with spring-loaded terminals must be assembled with the 3RV29 infeed system for approval as "Self-Protected Combination Motor Controllers (Type E)" according to UL 508/UL 60947-4-1. The 3RV1011 motor starter protectors do not have UL approval as Type E starters.

The terminal block or phase barriers cannot be used in combination with the 3RV19.5 three-phase busbars.

For construction with three-phase busbars, see "Busbar accessories", page 7/46 onwards.

Terminal blocks Type E

For increased clearances and creepage distances (1 and 2 inch)

S00¹⁾, S0

▶

3RV2928-1H

1

1 unit

41E

S3

5

3RT2946-4GA07

1

1 unit

41B

Phase barriers

For increased clearances and creepage distances (1 and 2 inch)

S00¹⁾, S0

▶

3RV2928-1K

1

1 unit

41E

S2

▶

3RV2938-1K

1

1 unit

41E

Auxiliary terminals, 3-pole



3RT2946-4F

For connection of auxiliary and control cables to the main conductor connections (for one side)

S3

5

3RT2946-4F

1

1 unit

41B

¹⁾ Not for 3RV1011 motor starter protectors.




Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Mounting accessories

Link modules

	For 3RV2 motor starter protectors/ circuit breakers	For 3RT2 contactors	Actuating voltage of contactor	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
	Size	Size		d					
Link modules for motor starter protector to contactor¹⁾									
 3RA2921-1AA00	For connection between motor starter protector and contactor with screw terminals				Screw terminals 				
	Single-unit packaging								
	S00/S0	S00	AC, DC	►	3RA1921-1DA00		1	1 unit	41B
	S00/S0	S0	AC	2	3RA2921-1AA00		1	1 unit	41B
	S00/S0	S0	DC, AC/DC	2	3RA2921-1BA00		1	1 unit	41B
	S2	S2	AC, DC, AC/DC	►	3RA2931-1AA00		1	1 unit	41B
	S3	S3	AC, DC, AC/DC	►	3RA1941-1AA00		1	1 unit	41B
	Multi-unit packaging								
	S00/S0	S00	AC, DC	►	3RA1921-1D		1	10 units	41B
	S00/S0	S0	AC	2	3RA2921-1A		1	10 units	41B
 3RA2931-1AA00	S00/S0	S0	DC, AC/DC	2	3RA2921-1B		1	10 units	41B
	S2	S2	AC, DC, AC/DC	►	3RA2931-1A		1	5 units	41B
	S3	S3	AC, DC, AC/DC	►	3RA1941-1A		1	5 units	41B
 3RA1941-1AA00									
 3RA2911-2AA00	For connection between motor starter protector and contactor with spring-loaded terminals				Spring-loaded terminals 				
	Single-unit packaging								
	S00	S00	AC, DC	►	3RA2911-2AA00		1	1 unit	41B
	S0	S0	AC ²⁾ , DC, AC/DC	►	3RA2921-2AA00		1	1 unit	41B
	Multi-unit packaging								
	S00	S00	AC, DC	►	3RA2911-2A		1	10 units	41B
	S0	S0	AC ²⁾ , DC, AC/DC	►	3RA2921-2A		1	10 units	41B
	Spacers²⁾								
	For height compensation on AC contactors size S0 with spring-loaded terminals								
	S0	S0	Single-unit packaging	2	3RA2911-1CA00		1	1 unit	41B
 3RA2911-1CA00	S0	S0	Multi-unit packaging	2	3RA2911-1C		1	5 units	41B

¹⁾ The link modules for motor starter protector to contactor cannot be used for 3RV1011, 3RV2.21-4PA1., 3RV2.21-4FA1., 3RV2.31-4K.1., 3RV2.31-4R.1., 3RV2.32-4K.1., 3RV2.32-4R.1., 3RV27 and 3RV28 motor starter protectors/circuit breakers.

²⁾ A spacer for height compensation on AC contactors size S0 is optionally available.

Note:

Link modules can be used in



- Size S00: up to max. 16 A
- Size S0: up to max. 32 A
- Size S2: up to max. 65 A

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Mounting accessories

For 3RV2 motor starter protectors/circuit breakers	For 3RW30, 3RW40 soft starters; 3RF34 solid-state contactors	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size	Size	d					
Link modules for motor starter protector to soft starter¹⁾ and motor starter protector to solid-state contactor¹⁾							
 3RA2921-1BA00	Connection between motor starter protector and soft starter/solid-state contactor with screw terminals		Screw terminals				
	Single-unit packaging						
	S00/S0	S00/S0	2	3RA2921-1BA00	1	1 unit	41B
	S2 ²⁾	S2 ²⁾	▶	3RA2931-1AA00	1	1 unit	41B
 3RA2931-1AA00	Multi-unit packaging						
	S00/S0	S00/S0	2	3RA2921-1B	1	10 units	41B
	S2 ²⁾	S2 ²⁾	▶	3RA2931-1A	1	5 units	41B
	S3 ³⁾	S3 ³⁾	▶	3RA1941-1A	1	5 units	41B
 3RA2911-2GA00	Connection between motor starter protector and soft starter with spring-loaded terminals		Spring-loaded terminals				
	Single-unit packaging						
	S00	S00	2	3RA2911-2GA00	1	1 unit	41B
	S0	S0	2	3RA2921-2GA00	1	1 unit	41B
 3RA1941-1A							

¹⁾ The link modules from motor starter protector to soft starter and motor starter protector to solid-state contactor cannot be used for the 3RV1011, 3RV2.21-4PA1., 3RV2.21-4FA1., 3RV2.31-4K.1., 3RV2.31-4R.1., 3RV2.32-4K.1., 3RV2.32-4R.1., 3RV27 and 3RV28 motor starter protectors/circuit breakers.

²⁾ To assemble the feeder between a motor starter protector and a soft starter in size S2, the 3RA2932-1CA00 standard mounting rail adapter must be used.

³⁾ It is only permissible to assemble the feeder between the motor starter protector and the soft starter in size S3 on a mounting plate.

Note:

Link modules can be used in

- Size S00: up to max. 16 A
- Size S0: up to max. 32 A
- Size S2: up to max. 65 A

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Mounting accessories

For 3RV2 motor starter protectors/circuit breakers	For 3RT2 contactors	Actuating voltage of contactor	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size	Size		d					
Hybrid link modules for motor starter protector to contactor¹⁾								
Mechanical and electrical connection between motor starter protector with screw terminals and contactor with spring-loaded terminals								
Single-unit packaging								
S00	S00	AC, DC	►	3RA2911-2FA00		1	1 unit	41B
S0	S0	AC ²⁾ , DC, AC/DC	►	3RA2921-2FA00		1	1 unit	41B
Multi-unit packaging								
S00	S00	AC, DC	►	3RA2911-2F		1	10 units	41B
S0	S0	AC ²⁾ , DC, AC/DC	2	3RA2921-2F		1	10 units	41B
Spacers²⁾								
For height compensation on AC contactors size S0 with spring-loaded terminals								
S0	S0	Single-unit packaging	2	3RA2911-1CA00		1	1 unit	41B
S0	S0	Multi-unit packaging	2	3RA2911-1C		1	5 units	41B

¹⁾ The hybrid link modules for motor starter protector to contactor cannot be used for 3RV1011, 3RV2.21-4PA1., 3RV2.21-4FA1., 3RV27 and 3RV28 motor starter protectors/circuit breakers. They are suitable only for constructing direct-on-line starters.

²⁾ A spacer for height compensation on AC contactors size S0 is optionally available.

Note:

Link modules can be used in

- Size S00: up to max. 16 A
- Size S0: up to max. 32 A

For motor starter protectors/circuit breakers	Version	SD	Screw terminals	PU (UNIT, SET, M)	PS*	PG
Type		d	Article No.	Price per PU		
Connection module (adapter and plug) for motor starter protectors/circuit breakers with screw terminals						
The connection module comprises an adapter and a motor feeder connector.						
Adapter						
Ambient temperature $T_{u \max.} = 60^\circ\text{C}$						
3RV2.2	Size S0, rated operational current I_{θ} at AC-3/400 V: 25 A	5	3RT1926-4RD01		1	1 unit 41B
Motor feeder connector						
3RV2.2	Size S0	5	3RT1900-4RE01		1	1 unit 41B

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Enclosures and front plates


Overview

Enclosures


For stand-alone installation of 3RV20 to 3RV24 motor starter protectors size S00 ($I_{n\max} = 16\text{ A}$), S0 ($I_{n\max} = 32\text{ A}$) and S2 ($I_{n\max} = 65\text{ A}$), molded-plastic and cast aluminum enclosures for surface mounting and molded-plastic enclosures for flush mounting are available in various dimensions.

When installed in a molded-plastic enclosure, the motor starter protectors have a rated operational voltage U_e of 500 V.

The enclosures for surface mounting have the degree of protection IP55; the enclosures for flush mounting also comply with the degree of protection IP55 at the front (the flush-mounted section complies with IP20).

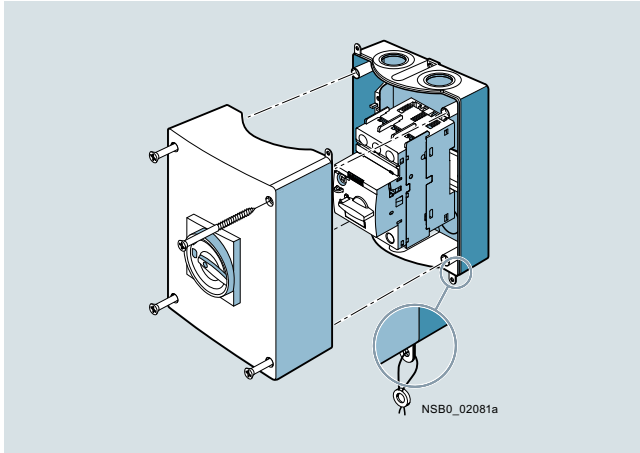

Enclosures for surface mounting

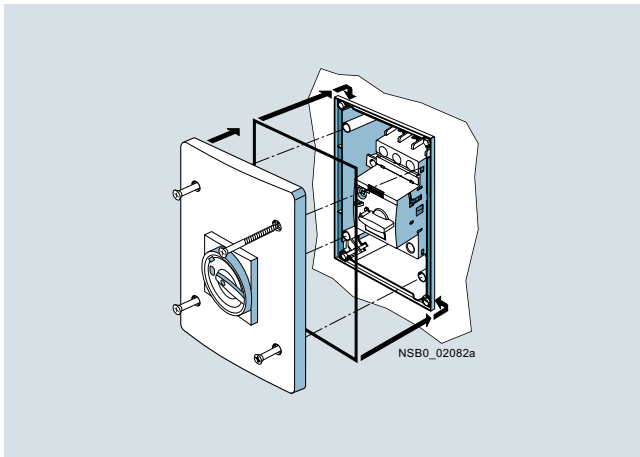

Enclosures for flush mounting (only for sizes S00 and S0)

All enclosures are equipped with N and PE terminals. There are two knock-out cable entries for cable glands at the top and two at the bottom; also on the rear corresponding cable entries are scored. There is a knockout on the top of the enclosure for indicator lights that are available as accessories.

The narrow enclosure can accommodate a motor starter protector without accessories, with transverse auxiliary switch and with lateral auxiliary switch. There is no provision for installing a motor starter protector with a signaling switch.

With size S00 to S2 circuit breakers the molded-plastic enclosures are equipped with a rotary operating mechanism.


The enclosures can be supplied with either a black rotary operating mechanism or with an EMERGENCY STOP rotary operating mechanism with a red/yellow knob.

In the OFF setting, all rotary operating mechanisms can be locked with up to three padlocks. The enclosures are not suitable for 3RV1011 motor starter protectors.

Front plates

Motor starter protectors are frequently required to be actuated in any enclosure. Front plates equipped with a rotary operating mechanism for 3RV20 to 3RV24 motor starter protectors sizes S00 to S3 are available for this purpose.

A holder for the motor starter protectors sizes S00 and S0, into which the motor starter protectors can be snapped, is available for the front plates. It is not possible to use a signaling switch or 4-pole auxiliary switch. The front plates are not suitable for 3RV1011 motor starter protectors.

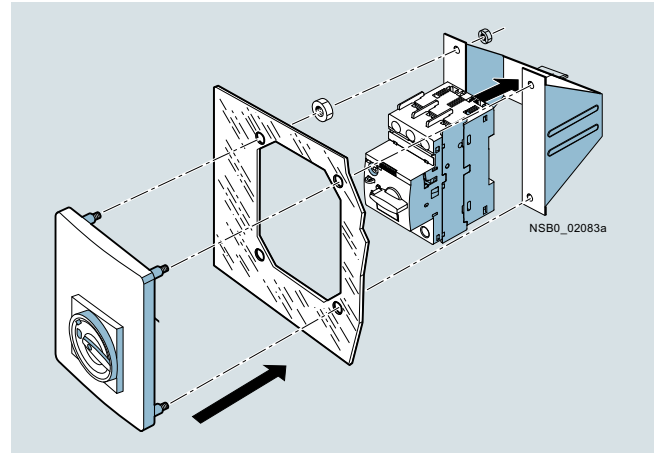

Front plate (including holder) for sizes S00 and S0

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Enclosures and front plates

Selection and ordering data

Version	Degree of protection	Integrated terminals	Width	For 3RV20 to 3RV24 motor starter protectors	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
			mm	Size	d					
Molded-plastic enclosures for surface mounting ¹⁾										
	With rotary operating mechanism, lockable in 0 position	IP55	N and PE	54 (for motor starter protector + lateral auxiliary switch)	S00 ⁵⁾ , S0	▶	3RV1923-1CA00	1	1 unit	41E
				72 (for motor starter protector + lateral auxiliary switch ²⁾ + auxiliary release)	S00 ⁵⁾ , S0	▶	3RV1923-1DA00	1	1 unit	41E
				82 (for motor starter protector + lateral auxiliary switch ²⁾ + auxiliary release)	S2	▶	3RV1933-1DA00	1	1 unit	41E
	With EMERGENCY STOP rotary operating mechanism, lockable in 0 position	IP55	N and PE	54 (for motor starter protector + lateral auxiliary switch)	S00 ⁵⁾ , S0	▶	3RV1923-1FA00	1	1 unit	41E
				72 (for motor starter protector + lateral auxiliary switch ²⁾ + auxiliary release)	S00 ⁵⁾ , S0	▶	3RV1923-1GA00	1	1 unit	41E
				82 (for motor starter protector + lateral auxiliary switch ²⁾ + auxiliary release)	S2	2	3RV1933-1GA00	1	1 unit	41E
Cast aluminum enclosures for surface mounting ¹⁾										
	With rotary operating mechanism, lockable in 0 position	IP65	PE ³⁾	72 (for motor starter protector + lateral auxiliary switch ²⁾ + auxiliary release)	S00 ⁵⁾ , S0	▶	3RV1923-1DA01	1	1 unit	41E
	With EMERGENCY STOP rotary operating mechanism, lockable in 0 position	IP65	PE ³⁾	72 (for motor starter protector + lateral auxiliary switch ²⁾ + auxiliary release)	S00 ⁵⁾ , S0	▶	3RV1923-1GA01	1	1 unit	41E
Molded-plastic enclosures for flush mounting ⁴⁾										
	With rotary operating mechanism, lockable in 0 position	IP55 (front side)	N and PE	72 (for motor starter protector + lateral auxiliary switch ²⁾ + auxiliary release)	S00 ⁵⁾ , S0	2	3RV1923-2DA00	1	1 unit	41E
	With EMERGENCY STOP rotary operating mechanism, lockable in 0 position	IP55 (front side)	N and PE	72 (for motor starter protector + lateral auxiliary switch ²⁾ + auxiliary release)	S00 ⁵⁾ , S0	2	3RV1923-2GA00	1	1 unit	41E
	With actuator diaphragm	IP55 (front side)	N and PE	72 (for motor starter protector + lateral auxiliary switch ²⁾ + auxiliary release)	S00 ⁶⁾	2	3RV1913-2DA00	1	1 unit	41E
Molded-plastic enclosures for surface mounting										
	With actuator diaphragm	IP55	N and PE	85	S00 ⁶⁾	▶	3RV1913-1CA00	1	1 unit	41E
				105	S00 ⁶⁾	▶	3RV1913-1DA00	1	1 unit	41E

¹⁾ The rear cable glands cannot be used on 3RV2.11-...2. and 3RV2.21-...2. devices with spring-loaded terminals.

²⁾ Only valid for lateral auxiliary switches with two auxiliary contacts.

³⁾ If required, an additional N terminal can be mounted (e.g. 8WA1011-1BG11).

⁴⁾ Not suitable for 3RV2.11-...2. and 3RV2.21-...2. devices with spring-loaded terminals.

⁵⁾ Not for 3RV1011 motor starter protectors.

⁶⁾ Only for 3RV1011 motor starter protectors.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > Enclosures and front plates

Version	Degree of protection	For 3RV20 to 3RV24 motor starter protectors	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Front plates ¹⁾								
 3RV1923-4B + 3RV1923-4G	Molded-plastic front plates with rotary operating mechanism, lockable in 0 position For actuation of 3RV2 motor starter protectors in any enclosure	IP55 (front side)	S00 ¹⁾ , up to S3	▶	3RV1923-4B	1	1 unit	41E
	Molded-plastic front plates with EMERGENCY STOP rotary operating mechanism, red/yellow, lockable in 0 position EMERGENCY STOP actuation of 3RV2 motor starter protectors in any enclosure	IP55 (front side)	S00 ¹⁾ , up to S3	▶	3RV1923-4E	1	1 unit	41E
	Holders for front plates Holder is mounted on front plate, motor starter protector with and without accessories is snapped in.	--	S00 ¹⁾ , S0	▶	3RV1923-4G	1	1 unit	41E

¹⁾ Not for 3RV1011 motor starter protectors.

²⁾ It is not possible to use a signaling switch or 4-pole auxiliary switch with front plates.

Version	Rated control supply voltage U_s	For 3RV20 to 3RV24 motor starter protectors	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Indicator lights								
 3RV1903-5B								
		110 ... 120	S00 to S3	5	3RV1903-5B	1	1 unit	41E
		220 ... 240		2	3RV1903-5C	1	1 unit	41E
		380 ... 415		2	3RV1903-5E	1	1 unit	41E
		480 ... 500		5	3RV1903-5G	1	1 unit	41E

3RV1903-5B

3RV1903-5B

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > 3RV29 infeed system

Overview

The 3RV29 infeed system is a convenient means of energy supply and distribution for a group of several motor starter protectors or complete load feeders with screw or spring-loaded terminals in sizes S00 and S0. Motor starter protectors or load feeders with a rated current of maximum 32 A each can be used. 3RV21 motor starter protectors/circuit breakers cannot be used in this system.

The system is based on a basic module complete with a lateral incoming unit (three-phase busbar with infeed). This infeed with spring-loaded terminals is mounted on the right or left, depending on the version, and can be supplied with a maximum conductor cross-section of 25 mm² (with end sleeve). A basic module has two sockets onto each of which a motor starter protector can be snapped.


Expansion modules (three-phase busbars for system expansion) are available for extending the system. The individual modules are connected through an expansion plug.

The electrical connection between the three-phase busbars and the motor starter protectors is implemented through plug-in connectors. The complete system can be mounted on a TH 35

standard mounting rail to IEC 60715, and can be expanded as required up to a maximum current carrying capacity of 63 A.

The system is mounted extremely quickly and easily thanks to the simple plug-in terminals. Thanks to the lateral infeed, the system also saves space in the control cabinet. The additional height required for the infeed unit is only 30 mm. The alternative infeed possibilities on each side offer a high degree of flexibility for configuring the control cabinet: Infeed on left-hand or right-hand side as well as infeed on one side and outfeed on the other side to supply further loads are all possible. A terminal block with spring-loaded terminals in combination with a standard mounting rail enables the integration of not only SIRIUS motor starter protectors but also single-phase, two-phase and three-phase components such as 5SY miniature circuit breakers or SIRIUS relay components.

The 3RV29 infeed system is approved in accordance with IEC to 500 V. It is also UL-approved and authorized for "Self-Protected Combination Motor Controllers" (Type E starter) as well as for Type F starter (Type E starter + contactor).

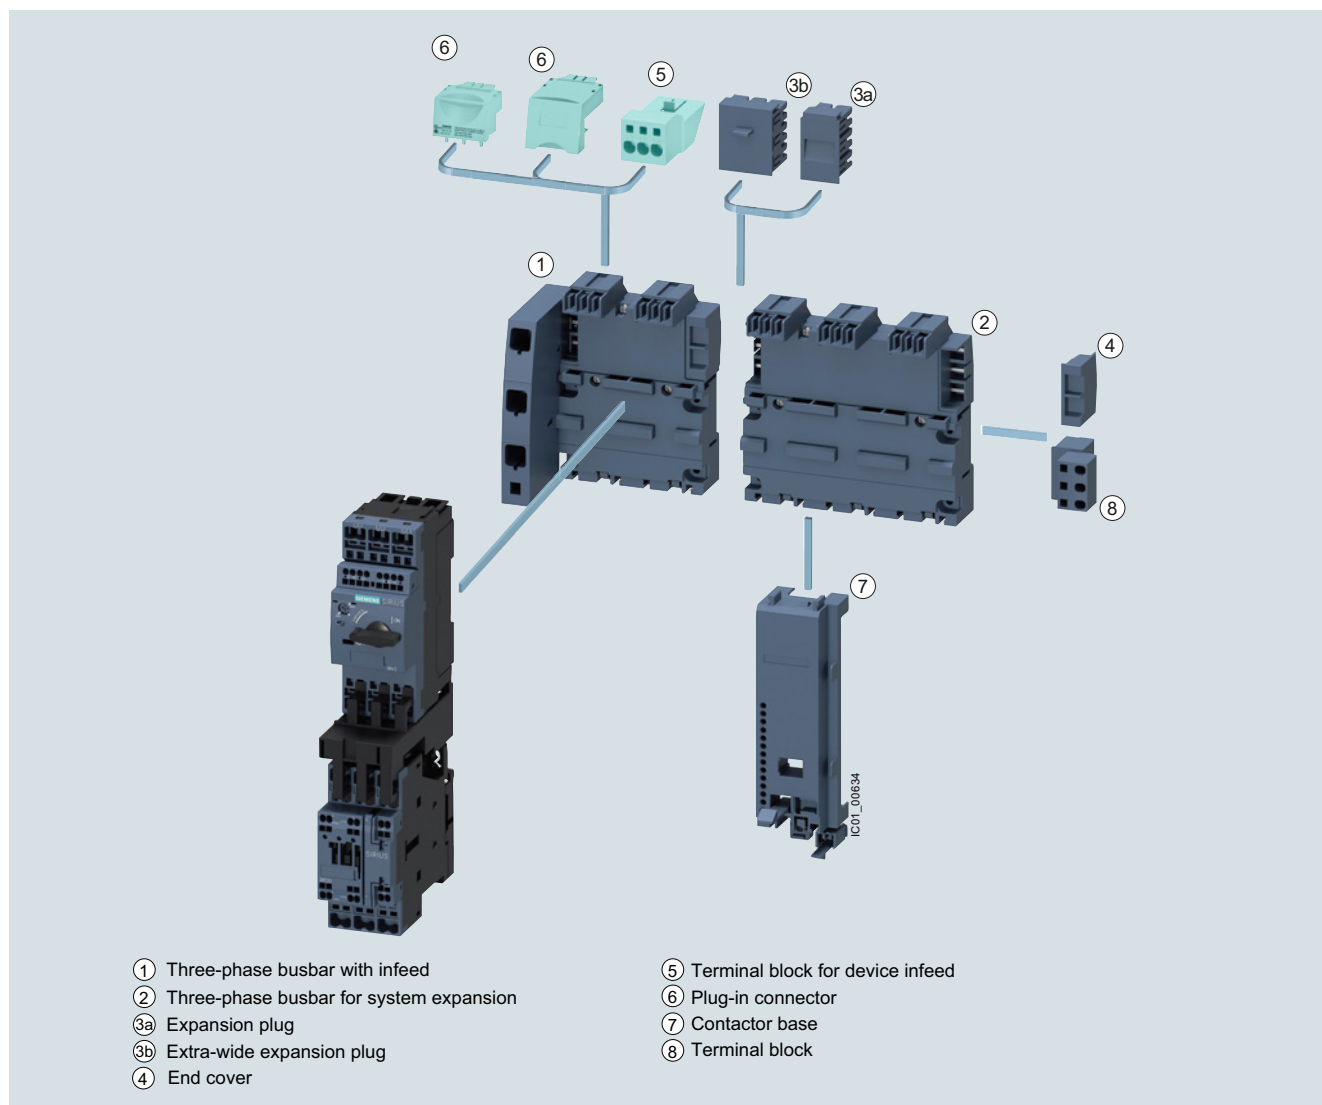

SIRIUS 3RV29 infeed system

① **Three-phase busbars with infeed**

A three-phase busbar with infeed unit is required for connecting the incoming supply. These modules comprise one infeed module and two sockets which each accept one motor starter protector. A choice of two versions with infeed on the left or right is available. The infeed is connected to spring-loaded terminals. They permit an infeed with conductor cross-sections of up to 25 mm² with end sleeve. An end cover is supplied with each module.

② **Three-phase busbars for system expansion**

The three-phase busbars for system expansion support expansion of the system. There is a choice of modules with two or three sockets. The system can be expanded as required up to a maximum current carrying capacity of 63 A. An expansion plug is supplied with each module.

③a **Expansion plug**

The expansion plug is used for electrical connection of adjacent three-phase busbars. The current carrying capacity of this plug equals 63 A. One expansion plug is supplied with each three-phase busbar for system expansion. Additional expansion plugs are therefore only required as spare parts.

③b **Extra-wide expansion plug**

The wide expansion plug makes the electrical connection between two three-phase busbars, thus performing the same function as the 3RV2917-5BA00 expansion plug; the electrical characteristics (e.g. a current carrying capacity of 63 A) are identical.

The 3RV2917-5E expansion plug is 10 mm wider than the 3RV2917-5BA00 expansion plug, hence in the plugged state there is a distance of 10 mm between the connected three-phase busbars. This distance can be used to lay the auxiliary current and control current wiring ("wiring duct"). The motor starter protector and contactor can be wired from underneath, which means that the complete cable duct above the system can be omitted.

④ **End cover**

The end cover is used to cover the three-phase busbar at the open end of the system. This cover is therefore only required once for each system. An end cover is supplied with each three-phase busbar system with infeed. Further end covers are therefore only required as spare parts.

⑤ **Terminal block for device infeed**

A new addition to the system is a connector for outfeeding to a device slot within a module. This offers the option not only of connecting three-phase loads to the system, but also of integrating single-phase loads into the infeed system.

⑥ **Plug-in connector**

The plug-in connector is used for the electrical connection between the three-phase busbar and the 3RV2 or 3RV1011 motor starter protector. These plug-in connectors are available for screw or spring-loaded terminals.

⑦ **Contactor base**

Load feeders can be assembled in the system using the S00 and S0 contactor base. The contactor bases are suitable for contactors sizes S00 and S0 with spring-loaded and screw terminals and are simply snapped onto the three-phase busbars. Direct-on-line starters and reversing starters are possible. One contactor base is required for direct-on-line starters and two are required for reversing starters.

To assemble load feeders for reversing starters, the contactor bases can be arranged alongside each other (90 mm overall width). In this case the mechanical interlocking of the contactors is possible. The S0 contactor bases are also suitable for soft starters size S00 and S0 with screw terminal.

The infeed system is designed for mounting onto a TH 35 standard mounting rail with 7.5 mm overall depth. This standard mounting rail gives the contactor base a stable mounting surface to sit on. If standard mounting rails with a depth of 15 mm are used, the spacer connected to the bottom of the contactor base must be knocked out and plugged into the standard mounting rail mating piece, which is also located on the underside. Then the contactor base also has a stable mounting surface. When standard mounting rails with a depth of 7.5 mm are used, the spacer has no function and can be removed.

The link modules are used for direct start load feeders, in which case the use of a contactor base is not absolutely necessary. Motor starter protector and contactor assemblies can then be directly snapped onto the sockets of the three-phase busbars. For feeders of sizes S00 and S0, the corresponding 3RA1921-1...., 3RA2911-2...., 3RA2921-1.... or 3RA2921-2.... link modules should generally be used.

⑧ **Terminal block**

The 3RV2917-5D terminal block enables the integration of not only SIRIUS motor starter protectors but also single-phase, two-phase and three-phase components. The three phases can be fed out of the system using the terminal block; which means that single-phase loads can also be integrated in the system. The terminal block is plugged into the slot of the expansion plug and thus enables outfeeding from the middle or end of the infeed system. The terminal block can be rotated through 180° and be locked to the support modules of the infeed system. In addition, the 45 mm wide TH 35 3RV1917-7B standard mounting rail option for screwing onto the support plate facilitates plugging the single-phase, two-phase and three-phase components onto the infeed system.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > 3RV29 infeed system

Technical specifications

More information

Equipment Manual, see
<https://support.industry.siemens.com/cs/ww/en/view/60279172>

General data

Type	3RV29.7				
Size	S00, S0				
Standards					
• IEC 60947-2	✓				
• IEC 60947-4-1	✓				
• UL 508/UL 60947-4-1	✓				
Rated current I_n	A	63			
Permissible rated current at inside temperature of control cabinet					
Motor starter protectors	Size	Rated current	Inside temperature of control cabinet		
• 3RV2.11/3RV1011	S00	... 14 A	60 °C	%	100
		> 14 ... 16 A	40 °C	%	100
			60 °C	%	87
• 3RV2.21	S0	... 16 A	60 °C	%	100
		> 16 ... 25 A	40 °C	%	100
			60 °C	%	87
		> 25 ... 32 A	40 °C	%	87
Permissible ambient temperature					
• Storage/transport	°C	-50 ... +80			
• Operation	°C	-20 ... +60			
Rated operational voltage U_e					
• Acc. to IEC	10% overvoltage	V AC	500		
	5% overvoltage	V AC	525		
• Acc. to UL/CSA		V AC	600		
Rated frequency	Hz	50/60			
Rated impulse withstand voltage U_{imp}	kV	6			
Short-circuit strength		corresponds to the mounted motor starter protector or load feeder			
Degree of protection acc. to IEC 60529		IP20 (In the terminal compartment of the infeed without connected IP00 conductor)			
Touch protection acc. to IEC 60529		Finger-safe			
✓ Has this function					
-- Does not have this function					

✓ Has this function

-- Does not have this function

Conductor cross-sections

Type		Three-phase busbar with infeed 3RV2917-1A, 3RV2917-1E	Terminal block 3RV2917-5D	Terminal block for device infeed 3RV2917-5FA00
Conductor cross-sections (min./max.)				
• Solid or stranded	mm ²	4 ... 25	1.5 ... 6	1 ... 10
• Finely stranded with end sleeve	mm ²	4 ... 25	1.5 ... 4	1 ... 6
• Finely stranded without end sleeve	mm ²	6 ... 25	1.5 ... 6	--
• AWG cables	AWG	10 ... 3	15 ... 10	18 ... 8
-- No				

Protection Equipment

Motor Starter Protectors/Circuit Breakers


SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > 3RV29 infeed system

Selection and ordering data

Type	Version	For 3RV20, 3RV23, 3RV24, 3RV27, 3RV28, 3RV1011 motor starter protectors	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
		Size	d					

Three-phase busbars with infeed



3RV2917-1A

Three-phase busbars with infeed

Incl. 3RV2917-6A end cover

For 2 motor starter protectors with screw or spring-loaded terminals

- With infeed on the left
- With infeed on the right

S00, S0
S00, S0

2
2

3RV2917-1A
3RV2917-1E

1
1

1 unit
1 unit

41E
41E

Three-phase busbars for system expansion



3RV2917-4A

Three-phase busbars

Incl. 3RV2917-5BA00 expansion plug

For motor starter protectors with screw or spring-loaded terminals

- For 2 motor starter protectors
- For 3 motor starter protectors

S00, S0
S00, S0

2
2

3RV2917-4A
3RV2917-4B

1
1

1 unit
1 unit

41E
41E

Plug-in connectors



3RV2917-5AA00

Plug-in connectors

To make contact with the 3RV2 motor starter protectors

- For spring-loaded terminals

- Single-unit packaging
- Multi-unit packaging

S00¹⁾
S0²⁾
S00¹⁾
S0²⁾

2
2
2
2

Spring-loaded terminals




3RV2917-5AA00
3RV2927-5AA00
3RV2917-5A
3RV2927-5A

1
1
1
1

1 unit
1 unit
10 units
10 units

41E
41E
41E
41E



3RV2917-5CA00

- For screw terminals

- Single-unit packaging
- Multi-unit packaging

S00¹⁾
S0²⁾
S00¹⁾
S0²⁾

2
2
2
2

Screw terminals



3RV2917-5CA00
3RV1927-5AA00
3RV2917-5C
3RV1927-5A

1
1
1
1

1 unit
1 unit
10 units
10 units

41E
41E
41E
41E

Plug-in connectors

To make contact with the 3RV1011 motor starter protectors

- For screw terminals

- Single-unit packaging
- Multi-unit packaging

S00
S00

5
5

3RV1917-5CA00
3RV1917-5C

1
1

1 unit
10 units

41E
41E

¹⁾ $I > 14$ A, please note derating.

²⁾ $I > 16$ A, please note derating.

Type	Version	For contactors	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
		Size	d					

Contactor bases



3RV2927-7AA00

Contactor bases

For mounting direct-on-line or reversing starters

Single-unit packaging

S00¹⁾
S00¹⁾, S0

2
2

3RV2917-7AA00
3RV2927-7AA00

1
1

1 unit
1 unit

41E
41E



¹⁾ Not for 3RV1011 motor starter protectors.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV2 Motor Starter Protectors/Circuit Breakers

Accessories > 3RV29 infeed system

Type	Version	SD	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
d							
Terminal blocks							
	Terminal blocks For integration of single-phase, two-phase and three-phase components	Single-unit packaging	2	3RV2917-5D	1	1 unit	41E
TH 35 standard mounting rails, width 45 mm							
	TH 35 standard mounting rails Acc. to IEC 60715, width 45 mm For mounting onto three-phase busbars	Single-unit packaging	2	3RV1917-7B	1	1 unit	41E
Extra-wide expansion plugs							
	Extra-wide expansion plugs As accessory	Single-unit packaging	2	3RV2917-5E	1	1 unit	41E
Expansion plugs							
	Expansion plugs¹⁾ As spare part	Single-unit packaging	2	3RV2917-5BA00	1	1 unit	41E
End covers							
	End covers²⁾ As spare part	Multi-unit packaging	2	3RV2917-6A	100	10 units	41E
Terminal blocks for device infeed							
	Terminal blocks for device infeed	Single-unit packaging	2	3RV2917-5FA00	1	1 unit	41E

¹⁾ The expansion plug is included in the scope of supply of the 3RV2917-4, three-phase busbars for system expansion.

²⁾ The end cover is included in the scope of supply of the 3RV2917-1, three-phase busbars with infeed system.

Protection Equipment

Motor Starter Protectors/Circuit Breakers

SIRIUS 3RV1 Motor Starter Protectors/Circuit Breakers


For fuse monitoring

Technical specifications

See pages 7/10, 7/12, 7/15, 7/20, 7/21 and 7/24

Selection and ordering data

Without auxiliary switches

	Rated current	Thermal overload release	Instantaneous electronic release	Short-circuit breaking capacity at 400 V AC	SD	Screw terminals 	PU (UNIT, SET, M)	PS*	PG
	I_n		$I >$	I_{cu}		Article No.	Price per PU		
	A	A	A	kA	d				
Size S00	0.2	0.2	1.2	100	►	3RV1611-0BD10		1	1 unit 41E



3RV1611-0BD10

Note:

The auxiliary switch required for signaling must be ordered separately.

Accessories

Version	Contacts	SD	Screw terminals 	PU (UNIT, SET, M)	PS*	PG
			Article No.	Price per PU		
		d				

Mountable auxiliary switches (essential accessories)



3RV2901-1E

Transverse auxiliary switches

With screw terminals, mountable on the front

1 NO + 1 NC

**3RV2901-1E**

1

1 unit

41E



3RV2901-1A

Lateral auxiliary switches

With screw terminals, mountable on the left

1 NO + 1 NC

**3RV2901-1A**

1

1 unit

41E

Additional auxiliary switches and other accessories, see "Accessories", page 7/43 onwards.