

Air Circuit Breakers



1/2

Introduction

3WL air circuit breakers/ non-automatic air circuit breakers up to 6300 A (AC), IEC

1/8 Introduction

1/9 3-pole, fixed-mounted versions

1/16 3-pole, withdrawable versions

1/23 4-pole, fixed-mounted versions

1/30 4-pole, withdrawable versions

1/37 Options

1/44 Accessories and spare parts

3WL non-automatic air circuit breakers up to 4000 A (DC)

1/66 3- and 4-pole,
fixed-mounted versions

1/67 3- and 4-pole, withdrawable versions

1/69 Accessories and spare parts

Ch. 12

3KC ATC5300 transfer control devices

For further technical product information:

[Configuration Manual](#)

Air Circuit Breakers 2014
Article No.: 3ZW1012-3WL11-0AC1

[Service & Support Portal](#)

www.siemens.com/lowvoltage/product-support







→ Product List:
Technical specifications






→ Entry List:
Certificates / Characteristics /
Download / FAQ / Manuals /
Updates

Air Circuit Breakers

Introduction

Overview

Devices	Page	Applications/ Individual components	Standards	Used in			
				Non-residential buildings	Residential buildings	Industry	
	3WL air circuit breakers/ non-automatic air circuit breakers up to 6300 A (AC), IEC	1/9 ... 1/36	As incoming-feeder, distribution, tie, and outgoing-feeder circuit breakers in electrical installations. For switching and protecting motors, capacitors, generators, transformers, busbars and cables.	IEC 60947-2, climate-proof accord- ing to IEC 60068-2-30	✓	--	✓
	3WL non-automatic air circuit breakers up to 4000 A (DC)	1/66 ... 1/68	As incoming-feeder, distribution, tie, and outgoing-feeder circuit breakers in electrical installations. For switching and protecting motors, capacitors, generators, transformers, busbars and cables.	IEC 60947-2, climate-proof accord- ing to IEC 60068-2-30	✓	--	✓
	Protective device with device holder and optional measurement function (ETU)	1/51	Electronic Trip Unit with protection func- tions LI, LSI, LSING and LSIN(G), with or without measurement function <i>Plus</i>	As for circuit breakers	✓	--	✓
 NSE0_00992b	Rating Plugs	1/51	For rated currents I_n from 250 A to 6300 A. The maximum rated current of the circuit breaker must not be exceed- ed.	As for circuit breakers	✓	--	✓
 NSE0_01027a	Ground-fault modules	1/51	With alarm and tripping	As for circuit breakers	✓	--	✓
 NSE0_01609	Displays	1/51	4-line displays for ETU45B	As for circuit breakers	✓	--	✓
 NSE0_00990a	Current transformers for N conductor protection	1/51	Internal transformers for N conductors, external transformers for N conductors	As for circuit breakers	✓	--	✓
	EMC filters	1/51	Common-mode interference suppressor filters	As for circuit breakers	✓	--	✓
 NSE0_00999a	More accessories for Electronic Trip Units	1/52	Sealable and lockable covers, automatic reset of the reclosing lockout, remote reset solenoid, retrofittable internal Cubicle BUS wiring, retrofittable internal wiring for connec- tion of external N and G transformers	As for circuit breakers	✓	--	✓
 NSE0_00982	Locking devices	1/52	Interlocking set for mechanical ON/OFF, locking devices against unauthorized closing in operator panels/for withdrawable circuit breakers, locking devices for operating mechanism handle with padlock, locking devices to prevent movement of the withdrawable circuit breakers, interlocking systems	As for circuit breakers	✓	--	✓
 NSE0_00987	Locking mechanisms	1/53	To prevent movement of the withdraw- able circuit breakers into disconnected position, to prevent opening of the cabinet door in ON position, to prevent opening of the cabinet door, to prevent movement with the cabinet door open	As for circuit breakers	✓	--	✓
 NSE0_00989	Interlocks	1/54	Mutual mechanical interlocking, couplings on the circuit breaker (with ring) for mutual interlocking, Bowden wire	As for circuit breakers	✓	--	✓

Devices	Page	Applications/ Individual components	Standards	Used in		
				Non-residential buildings	Residential buildings	Industry
	Transfer control devices 3KC ATC5300	Ch. 12 The transfer control device, equipped with two motor-driven circuit breakers, serves as a transfer system that automatically or manually switches between two power supply systems in low-voltage power distribution applications.	IEC 60947-6-1 DIN VDE 0660-114 UL 508 CSA 22.2 No. 14	✓	✓	✓
	Test devices	1/54 Manual tester Release 2 for Electronic Trip Units, function testers	As for circuit breakers	✓	--	✓
	Capacitor storage devices	1/54 For shunt releases	As for circuit breakers	✓	--	✓
	Indicators, control elements	1/55 Ready-to-close signaling switches, signaling switches, tripped signaling switches, operating cycles counters, stored energy status signaling switches, position signaling switches for guide frames, electric ON buttons, motor shutdown switches, EMERGENCY-STOP buttons	As for circuit breakers	✓	--	✓
	Auxiliary conductor connections	1/56 Male connectors for circuit breakers, extension for 1000 V male connector versions, male connectors and extension for 1000 V, auxiliary supply connectors for circuit breakers or guide frames, coding kits, sliding contacts for guide frames, blanking blocks for circuit breakers	As for circuit breakers	✓	--	✓
	Auxiliary releases	1/57 Closing solenoids/shunt releases, undervoltage releases	As for circuit breakers	✓	--	✓
	Operating mechanisms	1/57 Motorized operating mechanism	As for circuit breakers	✓	--	✓
	Auxiliary contacts	1/57 Auxiliary switch blocks	As for circuit breakers	✓	--	✓
	Door sealing frames, hoods, shutters	1/58 Door sealing frames, IP55 protective covers, shutters	As for circuit breakers	✓	--	✓
	Arc chutes	1/58 Arc chutes, arc chute covers	As for circuit breakers	✓	--	✓
	Coding for withdrawable version	1/58 By customer, for 36 coding variants	As for circuit breakers	✓	--	✓
	Grounding connection	1/59 Grounding connection between the guide frame and the withdrawable circuit breaker, contacting modules for withdrawable circuit breakers	As for circuit breakers	✓	--	✓
	Support brackets	1/59 For mounting fixed-mounted circuit breakers on vertical plane	As for circuit breakers	✓	--	✓
	CubicleBUS modules	1/59 Digital and analog input and output modules, Zone Selective Interlocking modules	As for circuit breakers	✓	--	✓
	Parameterization systems	1/59 Breaker Data Adapter (BDA), BDA Plus, Connection cables for BDA Plus, powerconfig parameterization software	As for circuit breakers	✓	--	✓
	Accessories for communications	1/60 Factory-fitted cables for CubicleBUS modules, SENTRON manuals for communication solutions, voltage transformers	As for circuit breakers	✓	--	✓
	Retrofitting and spare parts	1/60 PROFIBUS retrofit kits, COM15 PROFIBUS modules, COM16 MODBUS modules, MODBUS IEC retrofit kits, Breaker Status Sensor (BSS), measurement function Plus	As for circuit breakers	✓	--	✓
	Main conductor connections, fixed-mounted, main conductor connections, withdrawable	1/61, 1/62 Front-accessible main connections with double or single hole, rear vertical main connections, rear horizontal main connections, circuit connecting flanges, supports for front and DIN connecting bars	As for circuit breakers	✓	--	✓

Air Circuit Breakers

Introduction



Size I








Size II



Size III

Air circuit breakers

		3WL air circuit breakers/non-automatic air circuit breakers up to 6300 A (AC), IEC			3WL non-automatic air circuit breakers up to 4000 A (DC)
Size		I, II, III			II
Rated current I_n	A	630, 800, 1000, 1250, 1600, 2000, 2500, 3200, 4000, 5000, 6300			1000, 2000, 4000
Number of poles		3-pole, 4-pole			3-pole, 4-pole
Rated operational voltage U_e	V AC V DC	... 690/1000/1150 --			-- ... 1000
Rated ultimate short-circuit breaking capacity at 500 V AC	kA	Size I 55/66/85	Size II 66/80/100	Size III 100/150 (3-pole), 130 (4-pole)	30/25/20 (at 300/600/1000 V DC)
Endurance	Operating cycles	Up to 20000	15000	10000	15000
Mounting position		 			 
Degree of protection With cover Without cover (with door sealing frame)		IP55 IP41			IP55 IP41
Dimensions 3-/4-pole	W mm H mm D mm	320/410 434 291	460/590 434 291	704/914 434 291	460/590 434 291
	Fixed-mounted	H mm D mm	465.5 471	465.5 471	465.5 471
	Withdrawable	H mm D mm	465.5 471	465.5 471	465.5 471



NSE0_01108a



NSE0_01107a



NSE0_01108a



NSE0_01108a



NSE0_01111a

Electronic Trip Units for 3WL circuit breakers

Type	ETU15B ¹⁾	ETU25B	ETU27B	ETU45B	ETU76B
Overload protection	✓	✓	✓	✓	✓
Short-time delayed short-circuit protection	--	✓	✓	✓	✓
Instantaneous short-circuit protection	✓	✓	✓	✓	✓
Neutral conductor protection	--	--	✓	✓	✓
Ground-fault protection	--	--	✓	□	□
Zone Selective Interlocking	--	--	--	□	□
LCD, 4-line	--	--	--	□	--
LCD, graphic	--	--	--	--	✓
Communication	--	--	--	□	□
Measurement function <i>Plus</i>	--	--	--	□	□
Selectable parameter sets	--	--	--	--	✓
Parameters freely programmable	--	--	--	--	✓
CubicleBUS	--	--	--	✓	✓

✓ Standard

-- Not available

□ Optional

¹⁾ ETU15B cannot be used with 3WL circuit breakers, size III.

3WL air circuit breakers/non-automatic air circuit breakers according to UL 489 up to 5000 A, see [Catalog LV 16](#).

Introduction

Breaking capacity

Size	I					II					III			
Type	3WL11					3WL12					3WL13			
Breaking capacity	N	N	S	S	H	H	N	N	S	S	H	H	C 3-pole	C 4-pole
Short-circuit breaking capacity														
Rated operational voltage U_e up to 415 V AC														
I_{cu}	kA	55	66	85	66	80	100	100	150	130				
I_{cs}	kA	55	66	85	66	80	100	100	150	130				
I_{cm}	kA	121	145	187	145	176	220	220	330	286				
Rated operational voltage U_e up to 500 V AC														
I_{cu}	kA	55	66	85	66	80	100	100	150	130				
I_{cs}	kA	55	66	85	66	80	100	100	150	130				
I_{cm}	kA	121	145	187	145	176	220	220	330	286				
Rated operational voltage U_e up to 690 V AC														
I_{cu}	kA	42	50	66	50	75	85	85	150	130				
I_{cs}	kA	42	50	66	50	75	85	85	150	130				
I_{cm}	kA	88	105	145	105	165	187	187	330	286				
Rated operational voltage U_e up to 1000 V/1150 V AC														
I_{cu}	kA	--	--	50 ⁹⁾	--	--	50	50	70 ⁴⁾	70 ⁴⁾				
I_{cs}	kA	--	--	50 ⁹⁾	--	--	50	50	70 ⁴⁾	70 ⁴⁾				
I_{cm}	kA	--	--	105 ⁹⁾	--	--	105	105	154 ⁴⁾	154 ⁴⁾				
Rated short-time withstand current I_{cw}³⁾														
0.5 s	kA	55	66	75	66	80	100	100	100	100				
1 s	kA	42	50	66	55	66	80	80	100	100				
2 s	kA	29.5	35	46	39	46	65 ¹⁾ /70 ²⁾	80	80	80				
3 s	kA	24	29	44	32	44	50 ¹⁾ /65 ²⁾	65	65	65				
Short-circuit breaking capacity I_{cc} of the non-automatic air circuit breakers														
Up to 500 V AC	kA	55	66	75	66	80	100	100	100	100				
Up to 690 V AC	kA	42	50	66	50	75	85	85	100	100				
Up to 1000 V /1150 V AC	kA	--	--	50 ⁹⁾	--	--	50 ⁴⁾	50 ⁴⁾	70 ⁴⁾	70 ⁴⁾				

Size	II 		
Type	3WL12		
Breaking capacity	DC		
Short-circuit breaking capacity			
Up to 220 V DC I_{CC}	kA	35	
Up to 300 V DC I_{CC}	kA	30	
Up to 600 V DC I_{CC}	kA	25	
Up to 1000 V DC I_{CC}	kA	20	
Rated short-time withstand current I_{cw}			
0.5 s	kA	--	
1 s	kA	35 ⁵⁾ /30 ⁶⁾ /25 ⁷⁾ /20 ⁸⁾	
2 s	kA	--	
3 s	kA	--	

- (N) Circuit breaker with ECO breaking capacity N
- (S) Circuit breaker with standard breaking capacity S
- (H) Circuit breaker with high breaking capacity H
- (C) Circuit breakers with very high breaking capacity C
- (DC) Non-automatic air circuit breakers with DC breaking capacity

These breaking capacities are indicated in the corresponding tables by the symbols shown on orange backgrounds.

Note:

For further technical specifications see the configuration manual "Air Circuit Breakers". Free download from:

www.siemens.com/lowvoltage/manuals

- 1) Size II with $I_{n \max} \leq 2500$ A.
- 2) Size II with $I_{n \max} = 3200$ A and $I_{n \max} = 4000$ A.
- 3) At a rated voltage of ≥ 690 V the I_{cw} value of the circuit breaker cannot be greater than the I_{cu} or I_{cs} value at 690 V.

Abbreviations* (functions)	English long text	Explanation
L	Long Time Delay	Overload protection
S	Short Time Delay	Short-circuit protection (short-time delayed)
I	Instantaneous	Short-circuit protection (instantaneous)
N	Neutral Protection	Neutral conductor protection
G	Ground Fault	Ground-fault protection

* Designations according to IEC 60947-2, Appendix K.

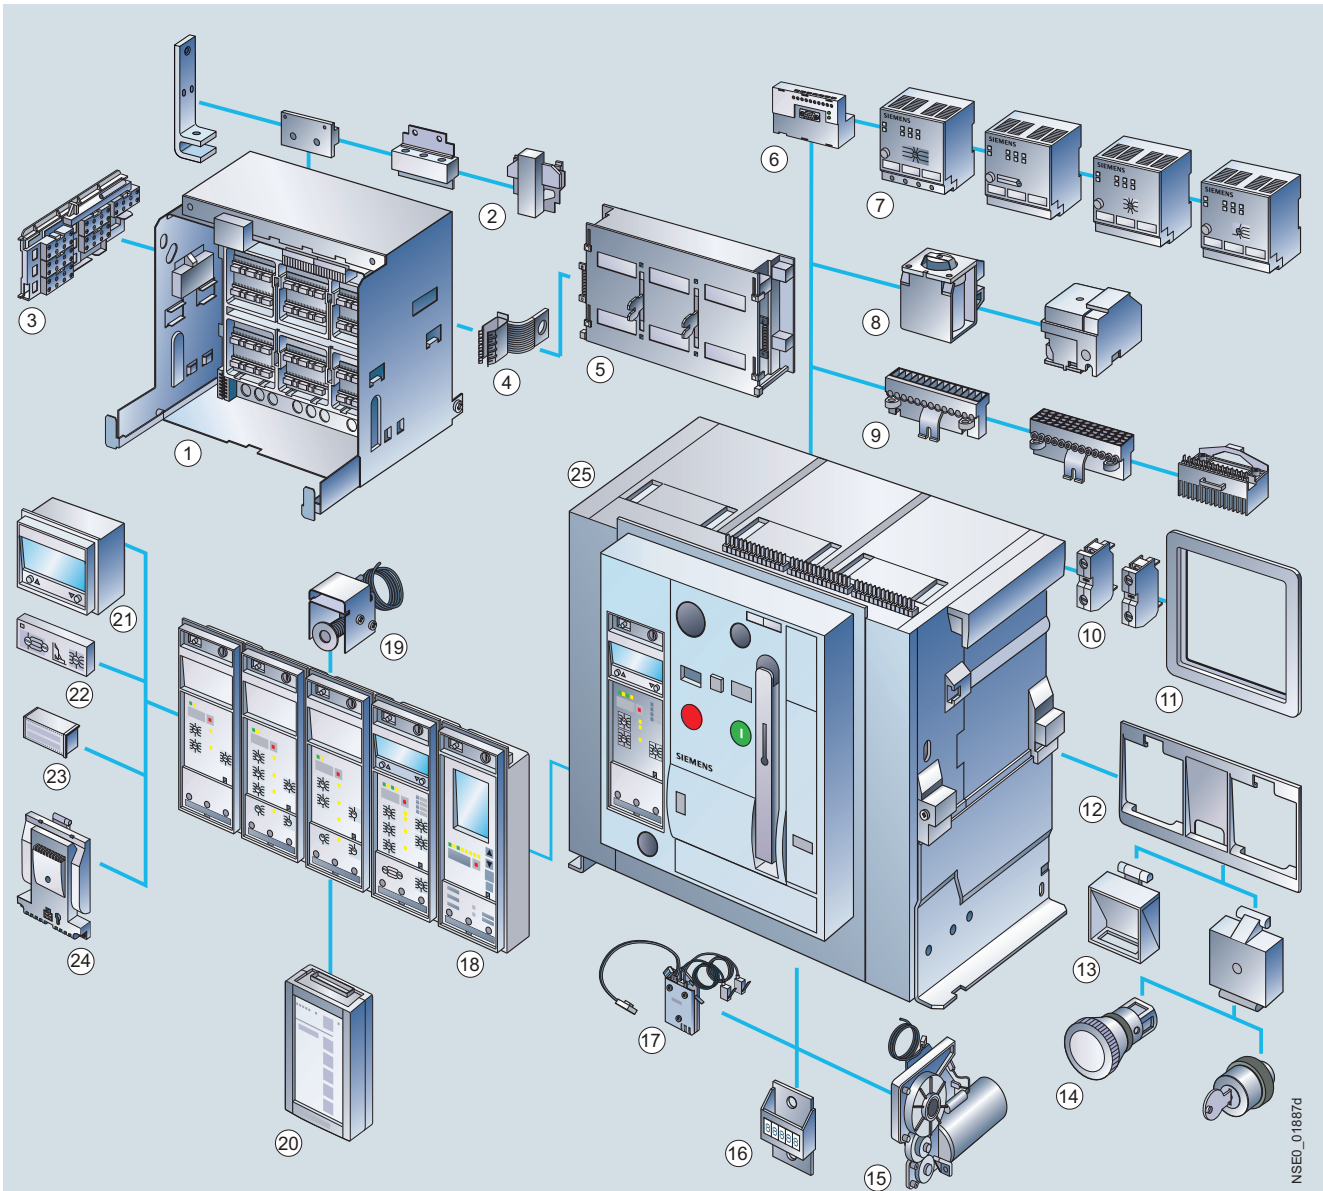
- 4) Rated operational voltage $U_e = 1150$ V.
- 5) At $U_e = 220$ V DC.
- 6) At $U_e = 300$ V DC.
- 7) At $U_e = 600$ V DC.
- 8) At $U_e = 1000$ V DC.
- 9) Values also apply to 690 V + 20 % version with Z-option "A16".

Air Circuit Breakers

Introduction

3WL air circuit breakers:

Superior individual products integrated into uniform power distribution systems - up to and including industry-specific industrial and infrastructure solutions

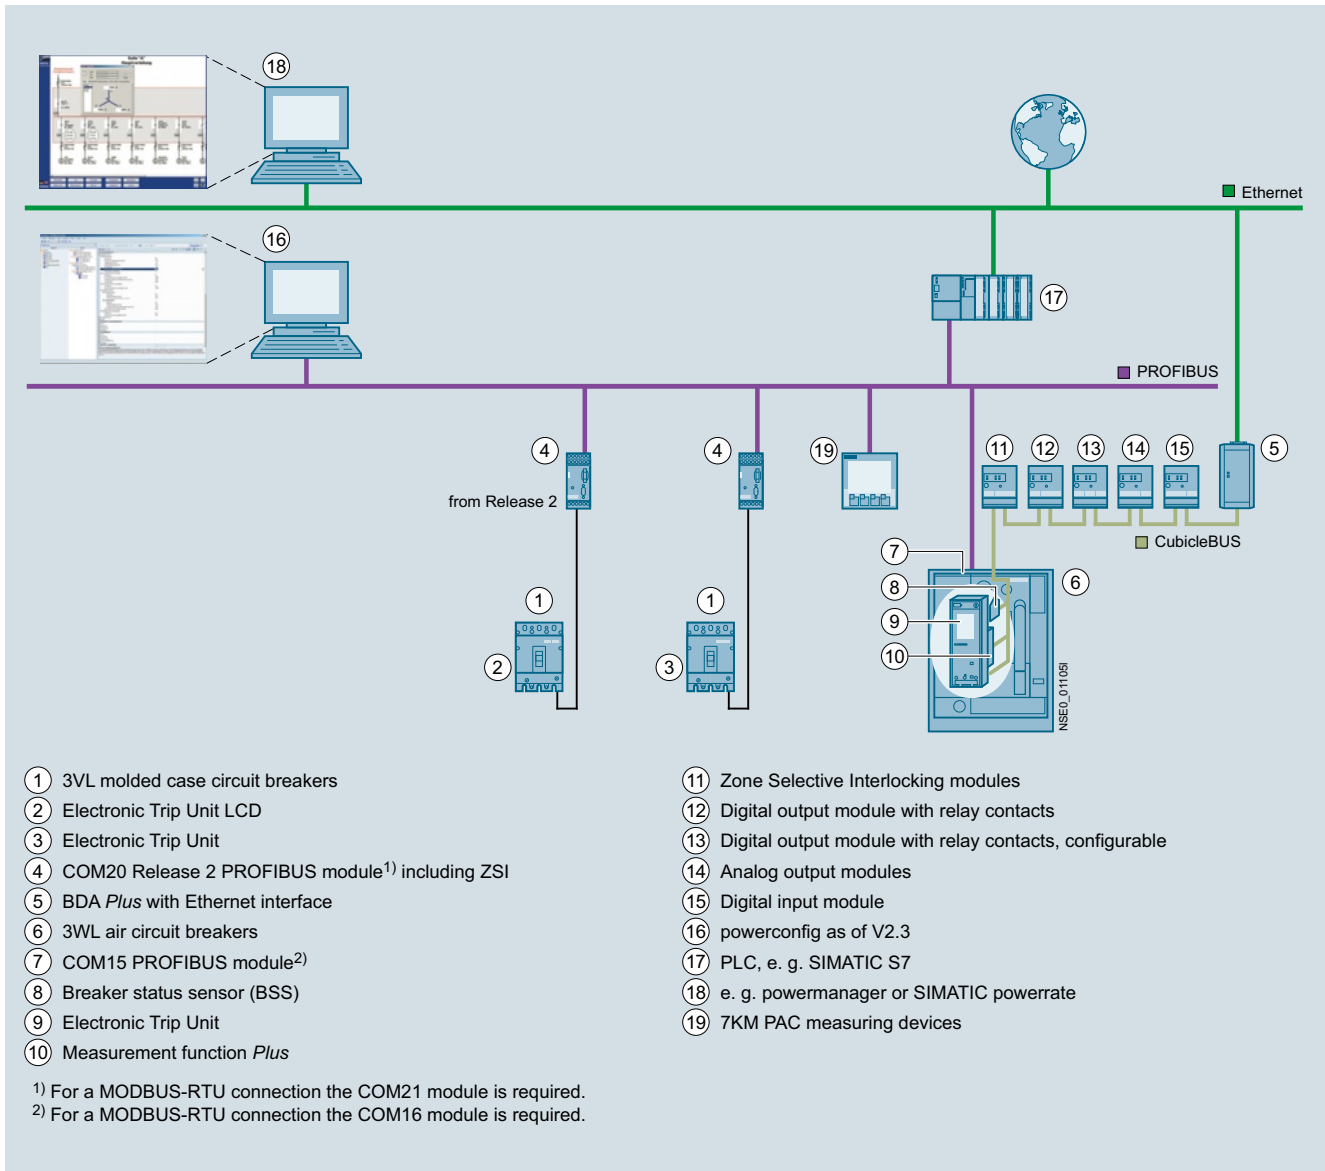


NSE0_01887d

- | | |
|---|--|
| ① Guide frame (pages 1/45 to 1/50) | ⑩ Auxiliary switch block (pages 1/37 and 1/57) |
| ② Main circuit connection front, flange, horizontal, vertical (pages 1/42, 1/61 and 1/62) | ⑪ Door sealing frame (pages 1/39 and 1/58) |
| ③ Position signaling switch (pages 1/40 and 1/55) | ⑫ Interlocking set for mechanical ON/OFF (page 1/52) |
| ④ Grounding connection, leading (page 1/59) | ⑬ Transparent panel, function insert (page 1/52) |
| ⑤ Shutters (pages 1/40 and 1/58) | ⑭ EMERGENCY-STOP pushbutton, key operated (page 1/55) |
| ⑥ COM15 PROFIBUS module or COM16 MODBUS module (pages 1/40 and 1/60) | ⑮ Motorized operating mechanism (pages 1/39 and 1/57) |
| ⑦ External CubicleBUS modules (page 1/59) | |
| ⑧ Closing coil, auxiliary release (pages 1/37, 1/39 and 1/57) | ⑯ Operating cycles counters (pages 1/39 and 1/55) |
| ⑨ Auxiliary conductor plug-in system (pages 1/41 and 1/56) | ⑰ Breaker status sensor (BSS) (pages 1/40 and 1/60) |
| | ⑱ Protective device with device holder, Electronic Trip Unit (ETU) (page 1/51) |
| | ⑲ Remote reset solenoid (pages 1/39 and 1/52) |
| | ⑳ Breaker data adapter (BDA Plus) (page 1/59) |
| | ㉑ Four-line display (page 1/51) |
| | ㉒ Ground-fault protection module (page 1/51) |
| | ㉓ Rating plug (pages 1/38 and 1/51) |
| | ㉔ Measurement function module (pages 1/40 and 1/51) |
| | ㉕ Air circuit breaker (pages 1/9 to 1/36) |

Introduction

Communication-capable circuit breakers (with ETU45B or ETU76B Electronic Trip Unit)



Features

- Coordinated communication concept using the PROFIBUS DP or MODBUS, ranging from 16 A to 6300 A with 3VL molded case circuit breakers and 3WL air circuit breakers
- The high level of modularity of circuit breakers and accessories allows easy retrofitting of all communication components
- Significant additional benefits for the switchgear due to the possibility of linking up external input and output modules to the circuit breaker-internal **CubicleBUS** of the 3WL
- Innovative software products for parameterization, operation, monitoring, and diagnostics of circuit breakers, both locally or via PROFIBUS DP, MODBUS or Ethernet/Intranet/Internet
- Complete integration of the circuit breakers into the Totally Integrated Power and Totally Integrated Automation solutions

Communication:

- For air circuit breakers with optional communication function (ETU45B or ETU76B Electronic Trip Unit) [see pages 1/9 to 1/36](#).
- For accessories [see pages 1/59 and 1/60](#).
- For more information [see also chapters "Measuring Devices and Power Monitoring" and "Software"](#).

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Introduction

Benefits

Low space requirements

The 3WL air circuit breakers require very little space. Size I devices (up to 2000 A) fit into a 400 mm wide switchgear panel. Size III devices (up to 6300 A) are the smallest of their kind and with their construction width of 704 mm fit into an 800 mm wide switchgear panel.

Modular design

Components like auxiliary releases, motorized operating mechanisms, Electronic Trip Units, current transformers, auxiliary circuit signaling switches, automatic reset devices, interlocks and engagement operating mechanisms can all be exchanged or retrofitted at a later stage, thus allowing the circuit breaker to be adapted to new, changing requirements.

The main contact elements can all be replaced in order to increase the endurance of the circuit breaker.

Retrofittable modules for Electronic Trip Units

Modularity is one of the main features of the new 3WL circuit breakers. Special LCDs, ground-fault modules, rating plugs and communication modules for the Electronic Trip Units are available for fast and easy retrofitting and adaptation to changing requirements.

Communication/measurement functions

The use of modern communication-capable circuit breakers opens up completely new possibilities in terms of start-up, parameterization, diagnostics, maintenance and operation. This allows many different ways of reducing costs and improving productivity in industrial plants, buildings and infrastructure projects to be achieved:

- Fast and reliable parameterization
- Timely information and response can prevent plant stoppages
- Effective diagnostics management
- Measured values are the basis for efficient load management, for drawing up power demand profiles and for allocating energy to cost centers
- Preventive maintenance reduces the risk of expensive plant downtimes
- Measurement function with a very wide range of measured values, such as current, voltage, energy, power etc.
- Can be used in 1000 V AC and 690 V IT networks

Application

- As incoming-feeder, distribution, tie, and outgoing-feeder circuit breakers in electrical installations.
- For switching and protecting motors, capacitors, generators, transformers, busbars and cables.

When connected to an electronic I&C system, the air circuit breakers offer a wide range of options for monitoring network events.

The extensive, coordinated SENTRON range of devices covers applications between 16 A and 6300 A with molded case and air circuit breakers.

The AC devices are available as circuit breakers and non-automatic air circuit breakers. DC devices are only available as non-automatic air circuit breakers.

Standards

3WL circuit breakers comply with:

- IEC 60947-2
- IEC 60947-2 Annex F / CISPR 11/22 Class B
- Climate-proof according to IEC 60068-2-30.

Versions with UL 489 also available, [see Catalog LV 16](#).

For further standards, [see Appendix](#).

Conductor cross-sections

Size	I					II				
Type		Up to 3WL11 10	3WL11 12	3WL11 16	3WL11 20	3WL12 08	3WL12 10	3WL12 12	3WL12 16	3WL12 20
Permissible load for withdrawable versions at rear horizontal main connections	• Up to 55 °C (Cu bare) • Up to 60 °C (Cu bare)¹⁾ • Up to 70 °C (Cu black painted)¹⁾	A 1000	1250	1600	2000	800	1000	1250	1600	2000
		A 1000	1250	1600	1930	800	1000	1250	1600	2000
		A 1000	1210	1490 ²⁾	1780	800	1000	1250	1600	2000
Main conductor minimum cross-sections	• Copper bars, bare • Copper bars, painted black	Unit(s) mm ²	1 × 60 × 10	2 × 40 × 10	2 × 50 × 10	3 × 50 × 10	1 × 50 × 10	1 × 60 × 10	2 × 40 × 10	2 × 50 × 10
		Unit(s) mm ²	1 × 60 × 10	2 × 40 × 10	2 × 50 × 10	3 × 50 × 10	1 × 50 × 10	1 × 60 × 10	2 × 40 × 10	2 × 50 × 10

Size	II				III			
Type		3WL12 25	3WL12 32	3WL12 40 ³⁾	3WL13 40	3WL13 50	3WL13 63 ³⁾	
Permissible load for withdrawable versions at rear horizontal main connections	• Up to 55 °C (Cu bare) • Up to 60 °C (Cu bare)¹⁾ • Up to 70 °C (Cu black painted)¹⁾	A 2500	3200	3950 ⁴⁾	4000	5000	5920	
		A 2500	3020	3810	4000	5000	5810	
		A 2280	2870	3600	4000	5000	5500	
Main conductor minimum cross-sections	• Copper bars, bare • Copper bars, painted black	Unit(s) mm ²	2 × 100 × 10	3 × 100 × 10	4 × 120 × 10	4 × 100 × 10	6 × 100 × 10	6 × 120 × 10
		Unit(s) mm ²	2 × 100 × 10	3 × 100 × 10	4 × 100 × 10 ⁵⁾	4 × 100 × 10	6 × 100 × 10	6 × 120 × 10

¹⁾ ETU76B with graphics display can be used up to max. 55 °C.

²⁾ At breaking capacity H: 1600 A up to 70 °C

³⁾ With rear vertical connections

⁴⁾ Size II, 3-pole, in fixed-mounted version

⁵⁾ Minimum main conductor cross-sections for 4-pole withdrawable circuit breakers: 4 × 120 mm × 10 mm

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

3-pole, fixed-mounted versions

Selection and ordering data

Size	Max. rated circuit breaker current $I_{n \max.}$	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 55/66 kA at 500 V, ECO breaking capacity N	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
	A	A	kA		Article No.	Basic price per PU			kg
Horizontal main circuit connection									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	55		3WL1106-2□□32-□□□□ 3WL1108-2□□32-□□□□ 3WL1110-2□□32-□□□□ 3WL1112-2□□32-□□□□ 3WL1116-2□□32-□□□□ 3WL1120-2□□32-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	43.000 43.000 43.000 43.000 43.000 43.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	66		3WL1208-2□□32-□□□□ 3WL1210-2□□32-□□□□ 3WL1212-2□□32-□□□□ 3WL1216-2□□32-□□□□ 3WL1220-2□□32-□□□□ 3WL1225-2□□32-□□□□ 3WL1232-2□□32-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	56.000 56.000 56.000 56.000 56.000 59.000 64.000
Vertical main circuit connection									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	55		3WL1106-2□□31-□□□□ 3WL1108-2□□31-□□□□ 3WL1110-2□□31-□□□□ 3WL1112-2□□31-□□□□ 3WL1116-2□□31-□□□□ 3WL1120-2□□31-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	43.000 43.000 43.000 43.000 43.000 43.000
II	800 1000 1250 1600 2000 2500 3200 4000	800 1000 1250 1600 2000 2500 3200 4000	66		3WL1208-2□□31-□□□□ 3WL1210-2□□31-□□□□ 3WL1212-2□□31-□□□□ 3WL1216-2□□31-□□□□ 3WL1220-2□□31-□□□□ 3WL1225-2□□31-□□□□ 3WL1232-2□□31-□□□□ 3WL1240-2□□31-□□□□	1 1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103 103	56.000 56.000 56.000 56.000 56.000 59.000 64.000 85.000

Options

		Additional price	
Non-automatic air circuit breakers²⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU15B: Protection functions LI ⁶⁾	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ³⁾	EB	✓
	ETU45B: Protection functions LSIN ³⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ³⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ⁴⁾	DG	✓
	ETU45B: Protection functions LSING ³⁾⁵⁾	EG	✓
	ETU45B: Protection functions LSING ³⁾⁵⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ³⁾⁵⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

2) For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

3) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51.

4) Current transformers for protection of the N conductor are to be ordered separately, see page 1/51.

5) ETU45B and ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

6) ETU15B cannot be used with 3WL circuit breakers, size III.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

3-pole, fixed-mounted versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 55/66 kA at 500 V, ECO breaking capacity N 	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
					Article No.	Basic price per PU			
A					A	kA	kg		
Front main circuit connection, single hole									
I	630	630	55	3WL1106-2□□33-□□□□		1	1 unit	103	43.000
	800	800		3WL1108-2□□33-□□□□		1	1 unit	103	43.000
	1000	1000		3WL1110-2□□33-□□□□		1	1 unit	103	43.000
	1250	1250		3WL1112-2□□33-□□□□		1	1 unit	103	43.000
	1600	1600		3WL1116-2□□33-□□□□		1	1 unit	103	43.000
II	800	800	66	3WL1208-2□□33-□□□□		1	1 unit	103	56.000
	1000	1000		3WL1210-2□□33-□□□□		1	1 unit	103	56.000
	1250	1250		3WL1212-2□□33-□□□□		1	1 unit	103	56.000
	1600	1600		3WL1216-2□□33-□□□□		1	1 unit	103	56.000
	2000	2000		3WL1220-2□□33-□□□□		1	1 unit	103	56.000
	2500	2500		3WL1225-2□□33-□□□□		1	1 unit	103	59.000
	3200	3200		3WL1232-2□□33-□□□□		1	1 unit	103	64.000
	Front main circuit connection, double hole								
I	630	630	55	3WL1106-2□□34-□□□□		1	1 unit	103	43.000
	800	800		3WL1108-2□□34-□□□□		1	1 unit	103	43.000
	1000	1000		3WL1110-2□□34-□□□□		1	1 unit	103	43.000
	1250	1250		3WL1112-2□□34-□□□□		1	1 unit	103	43.000
	1600	1600		3WL1116-2□□34-□□□□		1	1 unit	103	43.000
	2000	2000		3WL1120-2□□34-□□□□		1	1 unit	103	43.000
II	800	800	66	3WL1208-2□□34-□□□□		1	1 unit	103	56.000
	1000	1000		3WL1210-2□□34-□□□□		1	1 unit	103	56.000
	1250	1250		3WL1212-2□□34-□□□□		1	1 unit	103	56.000
	1600	1600		3WL1216-2□□34-□□□□		1	1 unit	103	56.000
	2000	2000		3WL1220-2□□34-□□□□		1	1 unit	103	56.000
	2500	2500		3WL1225-2□□34-□□□□		1	1 unit	103	59.000
	3200	3200		3WL1232-2□□34-□□□□		1	1 unit	103	64.000

Options		Additional price	
Non-automatic air circuit breakers²⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU15B: Protection functions LI ⁶⁾	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ³⁾	EB	✓
	ETU45B: Protection functions LSIN ³⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ³⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ⁴⁾	DG	✓
	ETU45B: Protection functions LSING ⁵⁾	EG	✓
	ETU45B: Protection functions LSING ⁵⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ⁵⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

2) For permissible rated short-time current I_{cs} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

3) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51.

4) Current transformers for protection of the N conductor are to be ordered separately, see page 1/51.

5) ETU45B and ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

6) ETU15B cannot be used with 3WL circuit breakers, size III.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

3-pole, fixed-mounted versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 66/80 kA at 500 V, standard breaking capacity S S	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.	
					Article No.	Basic price per PU				
A	A	A	kA						kg	
Horizontal main circuit connection										
I	630	630	66		3WL1106-3□□32-□□□□	1	1 unit	103	43.000	
	800	800			3WL1108-3□□32-□□□□	1	1 unit	103	43.000	
	1000	1000			3WL1110-3□□32-□□□□	1	1 unit	103	43.000	
	1250	1250			3WL1112-3□□32-□□□□	1	1 unit	103	43.000	
	1600	1600			3WL1116-3□□32-□□□□	1	1 unit	103	43.000	
	2000	2000			3WL1120-3□□32-□□□□	1	1 unit	103	43.000	
II	800	800	80		3WL1208-3□□32-□□□□	1	1 unit	103	56.000	
	1000	1000			3WL1210-3□□32-□□□□	1	1 unit	103	56.000	
	1250	1250			3WL1212-3□□32-□□□□	1	1 unit	103	56.000	
	1600	1600			3WL1216-3□□32-□□□□	1	1 unit	103	56.000	
	2000	2000			3WL1220-3□□32-□□□□	1	1 unit	103	56.000	
	2500	2500			3WL1225-3□□32-□□□□	1	1 unit	103	59.000	
	3200	3200			3WL1232-3□□32-□□□□	1	1 unit	103	64.000	
Vertical main circuit connection										
I	630	630	66		3WL1106-3□□31-□□□□	1	1 unit	103	43.000	
	800	800			3WL1108-3□□31-□□□□	1	1 unit	103	43.000	
	1000	1000			3WL1110-3□□31-□□□□	1	1 unit	103	43.000	
	1250	1250			3WL1112-3□□31-□□□□	1	1 unit	103	43.000	
	1600	1600			3WL1116-3□□31-□□□□	1	1 unit	103	43.000	
	2000	2000			3WL1120-3□□31-□□□□	1	1 unit	103	43.000	
II	800	800	80		3WL1208-3□□31-□□□□	1	1 unit	103	56.000	
	1000	1000			3WL1210-3□□31-□□□□	1	1 unit	103	56.000	
	1250	1250			3WL1212-3□□31-□□□□	1	1 unit	103	56.000	
	1600	1600			3WL1216-3□□31-□□□□	1	1 unit	103	56.000	
	2000	2000			3WL1220-3□□31-□□□□	1	1 unit	103	56.000	
	2500	2500			3WL1225-3□□31-□□□□	1	1 unit	103	59.000	
	3200	3200			3WL1232-3□□31-□□□□	1	1 unit	103	64.000	
	4000	4000			3WL1240-3□□31-□□□□	1	1 unit	103	85.000	

Options		Additional price	
Non-automatic air circuit breakers²⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU15B: Protection functions LI ⁶⁾	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ³⁾	EB	✓
	ETU45B: Protection functions LSIN ³⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ³⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ⁴⁾	DG	✓
	ETU45B: Protection functions LSING ³⁾⁵⁾	EG	✓
	ETU45B: Protection functions LSING ³⁾⁵⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ³⁾⁵⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

2) For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

3) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51.

4) Current transformers for protection of the N conductor are to be ordered separately, see page 1/51.

5) ETU45B and ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

6) ETU15B cannot be used with 3WL circuit breakers, size III.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

3-pole, fixed-mounted versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 66/80 kA at 500 V, standard breaking capacity S	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
A	A	A	kA		Article No.	Basic price per PU			kg
Front main circuit connection, single hole									
I	630 800 1000 1250 1600	630 800 1000 1250 1600	66		3WL1106-3□□33-□□□□ 3WL1108-3□□33-□□□□ 3WL1110-3□□33-□□□□ 3WL1112-3□□33-□□□□ 3WL1116-3□□33-□□□□	1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103	43.000 43.000 43.000 43.000 43.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	80		3WL1208-3□□33-□□□□ 3WL1210-3□□33-□□□□ 3WL1212-3□□33-□□□□ 3WL1216-3□□33-□□□□ 3WL1220-3□□33-□□□□ 3WL1225-3□□33-□□□□ 3WL1232-3□□33-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	56.000 56.000 56.000 56.000 56.000 59.000 64.000
Front main circuit connection, double hole									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	66		3WL1106-3□□34-□□□□ 3WL1108-3□□34-□□□□ 3WL1110-3□□34-□□□□ 3WL1112-3□□34-□□□□ 3WL1116-3□□34-□□□□ 3WL1120-3□□34-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	43.000 43.000 43.000 43.000 43.000 43.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	80		3WL1208-3□□34-□□□□ 3WL1210-3□□34-□□□□ 3WL1212-3□□34-□□□□ 3WL1216-3□□34-□□□□ 3WL1220-3□□34-□□□□ 3WL1225-3□□34-□□□□ 3WL1232-3□□34-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	56.000 56.000 56.000 56.000 56.000 59.000 64.000

Options			Additional price
Non-automatic air circuit breakers²⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU15B: Protection functions LI ⁶⁾	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ³⁾	EB	✓
	ETU45B: Protection functions LSIN ³⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ³⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ⁴⁾	DG	✓
	ETU45B: Protection functions LSING ³⁾⁵⁾	EG	✓
	ETU45B: Protection functions LSING ³⁾⁵⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ³⁾⁵⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

¹⁾ The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

²⁾ For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

³⁾ Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51.

⁴⁾ Current transformers for protection of the N conductor are to be ordered separately, see page 1/51.

⁵⁾ ETU45B and ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

⁶⁾ ETU15B cannot be used with 3WL circuit breakers, size III.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

3-pole, fixed-mounted versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 85/100 kA at 500 V, high breaking capacity H 	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	A	A	kA		Article No.	Basic price per PU			kg
Horizontal main circuit connection									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	85		3WL1106-4□□32-□□□□ 3WL1108-4□□32-□□□□ 3WL1110-4□□32-□□□□ 3WL1112-4□□32-□□□□ 3WL1116-4□□32-□□□□ 3WL1120-4□□32-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	43.000 43.000 43.000 43.000 43.000 43.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	100		3WL1208-4□□32-□□□□ 3WL1210-4□□32-□□□□ 3WL1212-4□□32-□□□□ 3WL1216-4□□32-□□□□ 3WL1220-4□□32-□□□□ 3WL1225-4□□32-□□□□ 3WL1232-4□□32-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	56.000 56.000 56.000 56.000 56.000 59.000 64.000
III	4000 5000	4000 5000	100		3WL1340-4□□32-□□□□ 3WL1350-4□□32-□□□□	1 1	1 unit 1 unit	103 103	82.000 82.000
Vertical main circuit connection									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	85		3WL1106-4□□31-□□□□ 3WL1108-4□□31-□□□□ 3WL1110-4□□31-□□□□ 3WL1112-4□□31-□□□□ 3WL1116-4□□31-□□□□ 3WL1120-4□□31-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	43.000 43.000 43.000 43.000 43.000 43.000
II	800 1000 1250 1600 2000 2500 3200 4000	800 1000 1250 1600 2000 2500 3200 4000	100		3WL1208-4□□31-□□□□ 3WL1210-4□□31-□□□□ 3WL1212-4□□31-□□□□ 3WL1216-4□□31-□□□□ 3WL1220-4□□31-□□□□ 3WL1225-4□□31-□□□□ 3WL1232-4□□31-□□□□ 3WL1240-4□□31-□□□□	1 1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103 103	56.000 56.000 56.000 56.000 56.000 59.000 64.000 85.000
III	4000 5000 6300	4000 5000 6300	100		3WL1340-4□□31-□□□□ 3WL1350-4□□31-□□□□ 3WL1363-4□□31-□□□□	1 1 1	1 unit 1 unit 1 unit	103 103 103	82.000 82.000 90.000

Options			Additional price
Non-automatic air circuit breakers²⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault prot.		
	ETU15B: Protection functions LI ⁶⁾	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ³⁾	EB	✓
	ETU45B: Protection functions LSIN ³⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ³⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ⁴⁾	DG	✓
	ETU45B: Protection functions LSING ³⁾⁵⁾	EG	✓
	ETU45B: Protection functions LSING ³⁾⁵⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ³⁾⁵⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

2) For permissible rated short-time current I_{sc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

3) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51.

4) Current transformers for protection of the N conductor are to be ordered separately, see page 1/51.

5) ETU45B and ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

6) ETU15B cannot be used with 3WL circuit breakers, size III.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

3-pole, fixed-mounted versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 85/100 kA at 500 V, high breaking capacity H 	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	A	A	kA		Article No.	Basic price per PU			kg
Front main circuit connection, single hole									
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	100		3WL1208-4□□33-□□□□ 3WL1210-4□□33-□□□□ 3WL1212-4□□33-□□□□ 3WL1216-4□□33-□□□□ 3WL1220-4□□33-□□□□ 3WL1225-4□□33-□□□□ 3WL1232-4□□33-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	56.000 56.000 56.000 56.000 56.000 59.000 64.000
III	4000	4000	100		3WL1340-4□□33-□□□□	1	1 unit	103	82.000
Front main circuit connection, double hole									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	85		3WL1106-4□□34-□□□□ 3WL1108-4□□34-□□□□ 3WL1110-4□□34-□□□□ 3WL1112-4□□34-□□□□ 3WL1116-4□□34-□□□□ 3WL1120-4□□34-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	43.000 43.000 43.000 43.000 43.000 43.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	100		3WL1208-4□□34-□□□□ 3WL1210-4□□34-□□□□ 3WL1212-4□□34-□□□□ 3WL1216-4□□34-□□□□ 3WL1220-4□□34-□□□□ 3WL1225-4□□34-□□□□ 3WL1232-4□□34-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	56.000 56.000 56.000 56.000 56.000 59.000 64.000
III	4000	4000	100		3WL1340-4□□34-□□□□	1	1 unit	103	82.000

Options		Additional price	
Non-automatic air circuit breakers²⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU15B: Protection functions L ⁶⁾	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ³⁾	EB	✓
	ETU45B: Protection functions LSIN ³⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ³⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ⁴⁾	DG	✓
	ETU45B: Protection functions LSING ³⁾⁵⁾	EG	✓
	ETU45B: Protection functions LSING ³⁾⁵⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ³⁾⁵⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

2) For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

3) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51.

4) Current transformers for protection of the N conductor are to be ordered separately, see page 1/51.

5) ETU45B and ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

6) ETU15B cannot be used with 3WL circuit breakers, size III.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

3-pole, fixed-mounted versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 150 kA at 500 V, very high breaking capacity C		PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
A		A	kA		Article No.	Basic price per PU				kg
Horizontal main circuit connection										
III	4000 5000	4000 5000	150		3WL1340-5□□32-□□□□ 3WL1350-5□□32-□□□□		1 1	1 unit 1 unit	103 103	82.000 82.000
Vertical main circuit connection										
III	4000 5000 6300	4000 5000 6300	150		3WL1340-5□□31-□□□□ 3WL1350-5□□31-□□□□ 3WL1363-5□□31-□□□□		1 1 1	1 unit 1 unit 1 unit	103 103 103	82.000 82.000 90.000
Options										
Non-automatic air circuit breakers ²⁾		Without Electronic Trip Units			AA		Additional price None			
Electronic Trip Units		Versions without ground-fault protection								
		ETU25B: Protection functions LSI			CB		✓			
		ETU45B: Protection functions LSIN ⁽³⁾			EB		✓			
		ETU45B: Protection functions LSIN ⁽³⁾ with 4-line display			FB		✓			
		ETU76B: Protection functions LSIN ⁽³⁾ with graphics display			NB		✓			
		Versions with ground-fault protection								
		ETU27B: Protection functions LSING ⁽⁴⁾			DG		✓			
		ETU45B: Protection functions LSING ⁽³⁾⁽⁵⁾			EG		✓			
		ETU45B: Protection functions LSING ⁽³⁾⁽⁵⁾ with 4-line display			FG		✓			
		ETU76B: Protection functions LSING ⁽³⁾⁽⁵⁾ with graphics display			NG		✓			
Operating mechanism, auxiliary release, auxiliary switch		Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO			1AA2		None			
		For further Article No. supplements see page 1/37								

✓ Additional price

- 1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.
- 2) For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

- 3) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51.
- 4) Current transformers for protection of the N conductor are to be ordered separately, see page 1/51.
- 5) ETU45B and ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

3-pole, withdrawable versions

Selection and ordering data

Size	Max. rated circuit breaker current $I_{n \text{ max.}}$	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 55/66 kA at 500 V, ECO breaking capacity N	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
	A	A	kA		Article No.	Basic price per PU			kg
Without guide frames²⁾ (for guide frames, see page 1/45 to 1/50)									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	55		3WL1106-2□□35-□□□□ 3WL1108-2□□35-□□□□ 3WL1110-2□□35-□□□□ 3WL1112-2□□35-□□□□ 3WL1116-2□□35-□□□□ 3WL1120-2□□35-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	45.000 45.000 45.000 45.000 45.000 45.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	66		3WL1208-2□□35-□□□□ 3WL1210-2□□35-□□□□ 3WL1212-2□□35-□□□□ 3WL1216-2□□35-□□□□ 3WL1220-2□□35-□□□□ 3WL1225-2□□35-□□□□ 3WL1232-2□□35-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	60.000 60.000 60.000 60.000 60.000 63.000 68.000
With guide frames, horizontal main circuit connection									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	55		3WL1106-2□□36-□□□□ 3WL1108-2□□36-□□□□ 3WL1110-2□□36-□□□□ 3WL1112-2□□36-□□□□ 3WL1116-2□□36-□□□□ 3WL1120-2□□36-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	70.000 70.000 70.000 70.000 70.000 70.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	66		3WL1208-2□□36-□□□□ 3WL1210-2□□36-□□□□ 3WL1212-2□□36-□□□□ 3WL1216-2□□36-□□□□ 3WL1220-2□□36-□□□□ 3WL1225-2□□36-□□□□ 3WL1232-2□□36-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	91.000 91.000 91.000 91.000 91.000 102.000 113.000
Options									
Non-automatic air circuit breakers³⁾					Without Electronic Trip Units	AA		Additional price	None
Electronic Trip Units					Versions without ground-fault protection				
					ETU15B: Protection functions LI	BB			✓
					ETU25B: Protection functions LSI	CB			✓
					ETU45B: Protection functions LSIN ⁴⁾	EB			✓
					ETU45B: Protection functions LSIN ⁴⁾ with 4-line display	FB			✓
					ETU76B: Protection functions LSIN ⁴⁾ with graphics display	NB			✓
					Versions with ground-fault protection				
					ETU27B: Protection functions LSING ⁵⁾	DG			✓
					ETU45B: Protection functions LSING ⁴⁾⁶⁾	EG			✓
					ETU45B: Protection functions LSING ⁴⁾⁶⁾ with 4-line display	FG			✓
					ETU76B: Protection functions LSING ⁴⁾⁶⁾ with graphics display	NG			✓
Operating mechanism, auxiliary release, auxiliary switch					Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2			None
					For further Article No. supplements see page 1/37				

✓ Additional price

¹⁾ The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

²⁾ Z options which are installed on the guide frame are not available.

³⁾ For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

⁴⁾ Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51.

⁵⁾ Current transformers for protection of the N conductor are to be ordered separately, see page 1/51.

⁶⁾ ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

3-pole, withdrawable versions

Size	Max. rated circuit breaker current <i>I</i> _n max.	Rated current ¹⁾ <i>I</i> _n	Breaking capacity <i>I</i> _{cu} = <i>I</i> _{cs}	DT	<i>I</i> _{cu} 55/66 kA at 500 V, ECO breaking capacity N		PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
					Article No.	Basic price per PU				
A	A	A	kA							kg
With guide frames, vertical main circuit connection										
I	630	630	55		3WL1106-2□□37-□□□□		1	1 unit	103	70.000
	800	800			3WL1108-2□□37-□□□□		1	1 unit	103	70.000
	1000	1000			3WL1110-2□□37-□□□□		1	1 unit	103	70.000
	1250	1250			3WL1112-2□□37-□□□□		1	1 unit	103	70.000
	1600	1600			3WL1116-2□□37-□□□□		1	1 unit	103	70.000
	2000	2000			3WL1120-2□□37-□□□□		1	1 unit	103	70.000
II	800	800	66		3WL1208-2□□37-□□□□		1	1 unit	103	91.000
	1000	1000			3WL1210-2□□37-□□□□		1	1 unit	103	91.000
	1250	1250			3WL1212-2□□37-□□□□		1	1 unit	103	91.000
	1600	1600			3WL1216-2□□37-□□□□		1	1 unit	103	91.000
	2000	2000			3WL1220-2□□37-□□□□		1	1 unit	103	91.000
	2500	2500			3WL1225-2□□37-□□□□		1	1 unit	103	102.000
	3200	3200			3WL1232-2□□37-□□□□		1	1 unit	103	113.000
	4000	4000			3WL1240-2□□37-□□□□		1	1 unit	103	121.000
	With guide frames, connecting flanges									
I	630	630	55		3WL1106-2□□38-□□□□		1	1 unit	103	70.000
	800	800			3WL1108-2□□38-□□□□		1	1 unit	103	70.000
	1000	1000			3WL1110-2□□38-□□□□		1	1 unit	103	70.000
	1250	1250			3WL1112-2□□38-□□□□		1	1 unit	103	70.000
	1600	1600			3WL1116-2□□38-□□□□		1	1 unit	103	70.000
	2000	2000			3WL1120-2□□38-□□□□		1	1 unit	103	70.000
II	800	800	66		3WL1208-2□□38-□□□□		1	1 unit	103	91.000
	1000	1000			3WL1210-2□□38-□□□□		1	1 unit	103	91.000
	1250	1250			3WL1212-2□□38-□□□□		1	1 unit	103	91.000
	1600	1600			3WL1216-2□□38-□□□□		1	1 unit	103	91.000
	2000	2000			3WL1220-2□□38-□□□□		1	1 unit	103	91.000
	2500	2500			3WL1225-2□□38-□□□□		1	1 unit	103	102.000
	3200	3200			3WL1232-2□□38-□□□□		1	1 unit	103	113.000

Options		Additional price	
Non-automatic air circuit breakers³⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU15B: Protection functions LI	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ⁴⁾	EB	✓
	ETU45B: Protection functions LSIN ⁴⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ⁴⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ⁵⁾	DG	✓
	ETU45B: Protection functions LSING ⁴⁾⁶⁾	EG	✓
	ETU45B: Protection functions LSING ⁴⁾⁶⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ⁴⁾⁶⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

2) Z options which are installed on the guide frame are not available.

3) For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

4) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51.

5) Current transformers for protection of the N conductor are to be ordered separately, see page 1/51.

6) ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

3-pole, withdrawable versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 66/80 kA at 500 V, standard breaking capacity S	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
A	A	A	kA		Article No.	Basic price per PU			kg
Without guide frames²⁾ (for guide frames, see page 1/45 to 1/50)									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	66		3WL1106-3□□35-□□□□ 3WL1108-3□□35-□□□□ 3WL1110-3□□35-□□□□ 3WL1112-3□□35-□□□□ 3WL1116-3□□35-□□□□ 3WL1120-3□□35-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	45.000 45.000 45.000 45.000 45.000 45.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	80		3WL1208-3□□35-□□□□ 3WL1210-3□□35-□□□□ 3WL1212-3□□35-□□□□ 3WL1216-3□□35-□□□□ 3WL1220-3□□35-□□□□ 3WL1225-3□□35-□□□□ 3WL1232-3□□35-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	60.000 60.000 60.000 60.000 60.000 63.000 68.000
With guide frames, horizontal main circuit connection									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	66		3WL1106-3□□36-□□□□ 3WL1108-3□□36-□□□□ 3WL1110-3□□36-□□□□ 3WL1112-3□□36-□□□□ 3WL1116-3□□36-□□□□ 3WL1120-3□□36-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	70.000 70.000 70.000 70.000 70.000 70.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	80		3WL1208-3□□36-□□□□ 3WL1210-3□□36-□□□□ 3WL1212-3□□36-□□□□ 3WL1216-3□□36-□□□□ 3WL1220-3□□36-□□□□ 3WL1225-3□□36-□□□□ 3WL1232-3□□36-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	91.000 91.000 91.000 91.000 91.000 102.000 113.000

Options		Additional price	
Non-automatic air circuit breakers³⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU15B: Protection functions LI	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ⁴⁾	EB	✓
	ETU45B: Protection functions LSIN ⁴⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ⁴⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ⁵⁾	DG	✓
	ETU45B: Protection functions LSING ⁴⁾⁶⁾	EG	✓
	ETU45B: Protection functions LSING ⁴⁾⁶⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ⁴⁾⁶⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

- 1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.
- 2) Z options which are installed on the guide frame are not available.
- 3) For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

- 4) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51.
- 5) Current transformers for protection of the N conductor are to be ordered separately, see page 1/51.
- 6) ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

3-pole, withdrawable versions

Size	Max. rated circuit breaker current $I_{n \text{ max.}}$	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 66/80 kA at 500 V, standard breaking capacity S Article No. Basic price per PU	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx. kg	
A	A	A	kA							
With guide frames, vertical main circuit connection										
I	630	630	66		3WL1106-3□□37-□□□□	1	1 unit	103	70.000	
	800	800			3WL1108-3□□37-□□□□	1	1 unit	103	70.000	
	1000	1000			3WL1110-3□□37-□□□□	1	1 unit	103	70.000	
	1250	1250			3WL1112-3□□37-□□□□	1	1 unit	103	70.000	
	1600	1600			3WL1116-3□□37-□□□□	1	1 unit	103	70.000	
	2000	2000			3WL1120-3□□37-□□□□	1	1 unit	103	70.000	
II	800	800	80		3WL1208-3□□37-□□□□	1	1 unit	103	91.000	
	1000	1000			3WL1210-3□□37-□□□□	1	1 unit	103	91.000	
	1250	1250			3WL1212-3□□37-□□□□	1	1 unit	103	91.000	
	1600	1600			3WL1216-3□□37-□□□□	1	1 unit	103	91.000	
	2000	2000			3WL1220-3□□37-□□□□	1	1 unit	103	91.000	
	2500	2500			3WL1225-3□□37-□□□□	1	1 unit	103	102.000	
	3200	3200			3WL1232-3□□37-□□□□	1	1 unit	103	113.000	
	4000	4000			3WL1240-3□□37-□□□□	1	1 unit	103	121.000	
	With guide frames, connecting flanges									
I	630	630	66		3WL1106-3□□38-□□□□	1	1 unit	103	70.000	
	800	800			3WL1108-3□□38-□□□□	1	1 unit	103	70.000	
	1000	1000			3WL1110-3□□38-□□□□	1	1 unit	103	70.000	
	1250	1250			3WL1112-3□□38-□□□□	1	1 unit	103	70.000	
	1600	1600			3WL1116-3□□38-□□□□	1	1 unit	103	70.000	
	2000	2000			3WL1120-3□□38-□□□□	1	1 unit	103	70.000	
II	800	800	80		3WL1208-3□□38-□□□□	1	1 unit	103	91.000	
	1000	1000			3WL1210-3□□38-□□□□	1	1 unit	103	91.000	
	1250	1250			3WL1212-3□□38-□□□□	1	1 unit	103	91.000	
	1600	1600			3WL1216-3□□38-□□□□	1	1 unit	103	91.000	
	2000	2000			3WL1220-3□□38-□□□□	1	1 unit	103	91.000	
	2500	2500			3WL1225-3□□38-□□□□	1	1 unit	103	102.000	
	3200	3200			3WL1232-3□□38-□□□□	1	1 unit	103	113.000	

Options		Additional price	
Non-automatic air circuit breakers³⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU15B: Protection functions LI	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ⁴⁾	EB	✓
	ETU45B: Protection functions LSIN ⁴⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ⁴⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ⁵⁾	DG	✓
	ETU45B: Protection functions LSING ⁴⁾⁶⁾	EG	✓
	ETU45B: Protection functions LSING ⁴⁾⁶⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ⁴⁾⁶⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

2) Z options which are installed on the guide frame are not available.

3) For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

4) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51.

5) Current transformers for protection of the N conductor are to be ordered separately, see page 1/51.

6) ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

3-pole, withdrawable versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 85/100 kA at 500 V, high breaking capacity H 	PU (UNIT, SET, M)	PS* P. unit	PG	Weight per PU approx.
A	A	A	kA		Article No.	Basic price per PU			kg
Without guide frames²⁾ (for guide frames, see page 1/45 to 1/50)									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	85		3WL1106-4□□35-□□□□ 3WL1108-4□□35-□□□□ 3WL1110-4□□35-□□□□ 3WL1112-4□□35-□□□□ 3WL1116-4□□35-□□□□ 3WL1120-4□□35-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	45.000 45.000 45.000 45.000 45.000 45.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	100		3WL1208-4□□35-□□□□ 3WL1210-4□□35-□□□□ 3WL1212-4□□35-□□□□ 3WL1216-4□□35-□□□□ 3WL1220-4□□35-□□□□ 3WL1225-4□□35-□□□□ 3WL1232-4□□35-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	60.000 60.000 60.000 60.000 60.000 63.000 68.000
III	4000 5000 6300	4000 5000 6300	100		3WL1340-4□□35-□□□□ 3WL1350-4□□35-□□□□ 3WL1363-4□□35-□□□□	1 1 1	1 unit 1 unit 1 unit	103 103 103	88.000 88.000 96.000
With guide frames, horizontal main circuit connection									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	85		3WL1106-4□□36-□□□□ 3WL1108-4□□36-□□□□ 3WL1110-4□□36-□□□□ 3WL1112-4□□36-□□□□ 3WL1116-4□□36-□□□□ 3WL1120-4□□36-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	70.000 70.000 70.000 70.000 70.000 70.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	100		3WL1208-4□□36-□□□□ 3WL1210-4□□36-□□□□ 3WL1212-4□□36-□□□□ 3WL1216-4□□36-□□□□ 3WL1220-4□□36-□□□□ 3WL1225-4□□36-□□□□ 3WL1232-4□□36-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	91.000 91.000 91.000 91.000 91.000 102.000 113.000
III	4000 5000	4000 5000	100		3WL1340-4□□36-□□□□ 3WL1350-4□□36-□□□□	1 1	1 unit 1 unit	103 103	148.000 148.000
Options									
Non-automatic air circuit breakers³⁾		Without Electronic Trip Units		AA	Additional price		None		
Electronic Trip Units		Versions without ground-fault prot.							
		ETU15B: Protection functions LI ⁷⁾		BB					✓
		ETU25B: Protection functions LSI		CB					✓
		ETU45B: Protection functions LSIN ⁴⁾		EB					✓
		ETU45B: Protection functions LSIN ⁴⁾ with 4-line display		FB					✓
		ETU76B: Protection functions LSIN ⁴⁾ with graphics display		NB					✓
		Versions with ground-fault protect.							
		ETU27B: Protection functions LSING ⁵⁾		DG					✓
		ETU45B: Protection functions LSING ⁴⁾⁶⁾		EG					✓
		ETU45B: Protection functions LSING ⁴⁾⁶⁾ with 4-line display		FG					✓
		ETU76B: Protection functions LSING ⁴⁾⁶⁾ with graphics display		NG					✓
Operating mechanism, auxiliary release, auxiliary switch		Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO		1AA2			None		
		For further Article No. supplements see page 1/37							

✓ Additional price

1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

2) Z options which are installed on the guide frame are not available.

3) For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

4) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51.

5) Current transformers for protection of the N conductor are to be ordered separately, see page 1/51.

6) ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

7) ETU15B cannot be used with 3WL circuit breakers, size III.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

3-pole, withdrawable versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 85/100 kA at 500 V, high breaking capacity H 	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	A	A	kA		Article No.	Basic price per PU			kg
With guide frames, vertical main circuit connection									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	85		3WL1106-4□□37-□□□□ 3WL1108-4□□37-□□□□ 3WL1110-4□□37-□□□□ 3WL1112-4□□37-□□□□ 3WL1116-4□□37-□□□□ 3WL1120-4□□37-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	70.000 70.000 70.000 70.000 70.000 70.000
II	800 1000 1250 1600 2000 2500 3200 4000	800 1000 1250 1600 2000 2500 3200 4000	100		3WL1208-4□□37-□□□□ 3WL1210-4□□37-□□□□ 3WL1212-4□□37-□□□□ 3WL1216-4□□37-□□□□ 3WL1220-4□□37-□□□□ 3WL1225-4□□37-□□□□ 3WL1232-4□□37-□□□□ 3WL1240-4□□37-□□□□	1 1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103 103	91.000 91.000 91.000 91.000 91.000 102.000 113.000 121.000
III	4000 5000 6300	4000 5000 6300	100		3WL1340-4□□37-□□□□ 3WL1350-4□□37-□□□□ 3WL1363-4□□37-□□□□	1 1 1	1 unit 1 unit 1 unit	103 103 103	148.000 148.000 166.000
With guide frames, connecting flanges									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	85		3WL1106-4□□38-□□□□ 3WL1108-4□□38-□□□□ 3WL1110-4□□38-□□□□ 3WL1112-4□□38-□□□□ 3WL1116-4□□38-□□□□ 3WL1120-4□□38-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	70.000 70.000 70.000 70.000 70.000 70.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	100		3WL1208-4□□38-□□□□ 3WL1210-4□□38-□□□□ 3WL1212-4□□38-□□□□ 3WL1216-4□□38-□□□□ 3WL1220-4□□38-□□□□ 3WL1225-4□□38-□□□□ 3WL1232-4□□38-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	91.000 91.000 91.000 91.000 91.000 102.000 113.000
III	4000	4000	100		3WL1340-4□□38-□□□□	1	1 unit	103	148.000
Options									
Non-automatic air circuit breakers³⁾	Without Electronic Trip Units				AA	None			
Electronic Trip Units	Versions without ground-fault protection								
	ETU15B: Protection functions LI ⁷⁾				BB				✓
	ETU25B: Protection functions LSI				CB				✓
	ETU45B: Protection functions LSIN ⁴⁾				EB				✓
	ETU45B: Protection functions LSIN ⁴⁾ with 4-line display				FB				✓
	ETU76B: Protection functions LSIN ⁴⁾ with graphics display				NB				✓
	Versions with ground-fault protection								
	ETU27B: Protection functions LSING ⁵⁾				DG				✓
	ETU45B: Protection functions LSING ⁴⁾⁶⁾				EG				✓
	ETU45B: Protection functions LSING ⁴⁾⁶⁾ with 4-line display				FG				✓
	ETU76B: Protection functions LSING ⁴⁾⁶⁾ with graphics display				NG				✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO				1AA2	None			
	For further Article No. supplements see page 1/37								

✓ Additional price

¹⁾ The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

²⁾ Z options which are installed on the guide frame are not available.

³⁾ For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

⁴⁾ Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51.

⁵⁾ Current transformers for protection of the N conductor are to be ordered separately, see page 1/51.

⁶⁾ ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

⁷⁾ ETU15B cannot be used with 3WL circuit breakers, size III.

* You can order this quantity or a multiple thereof.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

3-pole, withdrawable versions

Size	Max. rated circuit breaker current $I_{n\ max.}$	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 150 kA at 500 V, very high breaking capacity C	Ⓒ	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
A	A	A	kA		Article No.	Basic price per PU				kg
Without guide frames ²⁾ (for guide frames, see page 1/45 to 1/50)										
III	4000 5000 6300	4000 5000 6300	150		3WL1340-5□□35-□□□□ 3WL1350-5□□35-□□□□ 3WL1363-5□□35-□□□□		1 1 1	1 unit 1 unit 1 unit	103 103 103	88.000 88.000 96.000
With guide frames, horizontal main circuit connection										
III	4000 5000	4000 5000	150		3WL1340-5□□36-□□□□ 3WL1350-5□□36-□□□□		1 1	1 unit 1 unit	103 103	148.000 148.000
With guide frames, vertical main circuit connection										
III	4000 5000 6300	4000 5000 6300	150		3WL1340-5□□37-□□□□ 3WL1350-5□□37-□□□□ 3WL1363-5□□37-□□□□		1 1 1	1 unit 1 unit 1 unit	103 103 103	148.000 148.000 166.000

Options		Additional price	
Non-automatic air circuit breakers³⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ⁴⁾	EB	✓
	ETU45B: Protection functions LSIN ⁴⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ⁴⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ⁵⁾	DG	✓
	ETU45B: Protection functions LSING ⁴⁾⁶⁾	EG	✓
	ETU45B: Protection functions LSING ⁴⁾⁶⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ⁴⁾⁶⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

¹⁾ The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

²⁾ Z options which are installed on the guide frame are not available.

³⁾ For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

⁴⁾ Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51.

⁵⁾ Current transformers for protection of the N conductor are to be ordered separately, see page 1/51.

⁶⁾ ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

4-pole, fixed-mounted versions

Selection and ordering data

Size	Max. rated circuit breaker current $I_{n \max.}$	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 55/66 kA at 500 V, ECO breaking capacity N	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
A	A	kA			Article No.	Basic price per PU			kg
Horizontal main circuit connection									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	55		3WL1106-2□□42-□□□□ 3WL1108-2□□42-□□□□ 3WL1110-2□□42-□□□□ 3WL1112-2□□42-□□□□ 3WL1116-2□□42-□□□□ 3WL1120-2□□42-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	50.000 50.000 50.000 50.000 50.000 50.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	66		3WL1208-2□□42-□□□□ 3WL1210-2□□42-□□□□ 3WL1212-2□□42-□□□□ 3WL1216-2□□42-□□□□ 3WL1220-2□□42-□□□□ 3WL1225-2□□42-□□□□ 3WL1232-2□□42-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	67.000 67.000 67.000 67.000 67.000 71.000 77.000
Vertical main circuit connection									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	55		3WL1106-2□□41-□□□□ 3WL1108-2□□41-□□□□ 3WL1110-2□□41-□□□□ 3WL1112-2□□41-□□□□ 3WL1116-2□□41-□□□□ 3WL1120-2□□41-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	50.000 50.000 50.000 50.000 50.000 50.000
II	800 1000 1250 1600 2000 2500 3200 4000	800 1000 1250 1600 2000 2500 3200 4000	66		3WL1208-2□□41-□□□□ 3WL1210-2□□41-□□□□ 3WL1212-2□□41-□□□□ 3WL1216-2□□41-□□□□ 3WL1220-2□□41-□□□□ 3WL1225-2□□41-□□□□ 3WL1232-2□□41-□□□□ 3WL1240-2□□41-□□□□	1 1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103 103	75.000 75.000 75.000 75.000 67.000 71.000 77.000 103.000

Options		Additional price	
Non-automatic air circuit breakers²⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU15B: Protection functions LI	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ³⁾	EB	✓
	ETU45B: Protection functions LSIN ³⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ³⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ³⁾	DG	✓
	ETU45B: Protection functions LSING ³⁾⁴⁾	EG	✓
	ETU45B: Protection functions LSING ³⁾⁴⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ³⁾⁴⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

2) For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

3) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51. The internal current transformers for N conductors can be ordered by adding the supplement "-Z" and the order code "F23", see page 1/40.

4) ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

4-pole, fixed-mounted versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 55/66 kA at 500 V, ECO breaking capacity N	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
A	A	A	kA		Article No.	Basic price per PU			kg
Front main circuit connection, single hole									
I	630 800 1000 1250 1600	630 800 1000 1250 1600	55		3WL1106-2□□43-□□□□ 3WL1108-2□□43-□□□□ 3WL1110-2□□43-□□□□ 3WL1112-2□□43-□□□□ 3WL1116-2□□43-□□□□	1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103	50.000 50.000 50.000 50.000 50.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	66		3WL1208-2□□43-□□□□ 3WL1210-2□□43-□□□□ 3WL1212-2□□43-□□□□ 3WL1216-2□□43-□□□□ 3WL1220-2□□43-□□□□ 3WL1225-2□□43-□□□□ 3WL1232-2□□43-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	67.000 67.000 67.000 67.000 67.000 71.000 77.000
Front main circuit connection, double hole									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	55		3WL1106-2□□44-□□□□ 3WL1108-2□□44-□□□□ 3WL1110-2□□44-□□□□ 3WL1112-2□□44-□□□□ 3WL1116-2□□44-□□□□ 3WL1120-2□□44-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	50.000 50.000 50.000 50.000 50.000 50.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	66		3WL1208-2□□44-□□□□ 3WL1210-2□□44-□□□□ 3WL1212-2□□44-□□□□ 3WL1216-2□□44-□□□□ 3WL1220-2□□44-□□□□ 3WL1225-2□□44-□□□□ 3WL1232-2□□44-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	67.000 67.000 67.000 67.000 67.000 71.000 77.000

Options			Additional price
Non-automatic air circuit breakers²⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU15B: Protection functions LI	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ³⁾	EB	✓
	ETU45B: Protection functions LSIN ³⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ³⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ³⁾	DG	✓
	ETU45B: Protection functions LSING ³⁾ ⁴⁾	EG	✓
	ETU45B: Protection functions LSING ³⁾ ⁴⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ³⁾ ⁴⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

- 1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.
- 2) For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

- 3) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51. The internal current transformers for N conductors can be ordered by adding the supplement "-Z" and the order code "F23", see page 1/40.

- 4) ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

4-pole, fixed-mounted versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 66/80 kA at 500 V, standard breaking capacity S	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	A	A	kA		Article No.	Basic price per PU			kg
Horizontal main circuit connection									
I	630	630	66		3WL1106-3□□42-□□□□		1	1 unit	103 50.000
	800	800			3WL1108-3□□42-□□□□		1	1 unit	103 50.000
	1000	1000			3WL1110-3□□42-□□□□		1	1 unit	103 50.000
	1250	1250			3WL1112-3□□42-□□□□		1	1 unit	103 50.000
	1600	1600			3WL1116-3□□42-□□□□		1	1 unit	103 50.000
	2000	2000			3WL1120-3□□42-□□□□		1	1 unit	103 50.000
II	800	800	80		3WL1208-3□□42-□□□□		1	1 unit	103 67.000
	1000	1000			3WL1210-3□□42-□□□□		1	1 unit	103 67.000
	1250	1250			3WL1212-3□□42-□□□□		1	1 unit	103 67.000
	1600	1600			3WL1216-3□□42-□□□□		1	1 unit	103 67.000
	2000	2000			3WL1220-3□□42-□□□□		1	1 unit	103 67.000
	2500	2500			3WL1225-3□□42-□□□□		1	1 unit	103 71.000
	3200	3200			3WL1232-3□□42-□□□□		1	1 unit	103 77.000
Vertical main circuit connection									
I	630	630	66		3WL1106-3□□41-□□□□		1	1 unit	103 50.000
	800	800			3WL1108-3□□41-□□□□		1	1 unit	103 50.000
	1000	1000			3WL1110-3□□41-□□□□		1	1 unit	103 50.000
	1250	1250			3WL1112-3□□41-□□□□		1	1 unit	103 50.000
	1600	1600			3WL1116-3□□41-□□□□		1	1 unit	103 50.000
	2000	2000			3WL1120-3□□41-□□□□		1	1 unit	103 50.000
II	800	800	80		3WL1208-3□□41-□□□□		1	1 unit	103 67.000
	1000	1000			3WL1210-3□□41-□□□□		1	1 unit	103 67.000
	1250	1250			3WL1212-3□□41-□□□□		1	1 unit	103 67.000
	1600	1600			3WL1216-3□□41-□□□□		1	1 unit	103 67.000
	2000	2000			3WL1220-3□□41-□□□□		1	1 unit	103 67.000
	2500	2500			3WL1225-3□□41-□□□□		1	1 unit	103 71.000
	3200	3200			3WL1232-3□□41-□□□□		1	1 unit	103 77.000
	4000	4000			3WL1240-3□□41-□□□□		1	1 unit	103 103.000

Options		Additional price	
Non-automatic air circuit breakers²⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU15B: Protection functions LI	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ³⁾	EB	✓
	ETU45B: Protection functions LSIN ³⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ³⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ³⁾	DG	✓
	ETU45B: Protection functions LSING ³⁾⁴⁾	EG	✓
	ETU45B: Protection functions LSING ³⁾⁴⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ³⁾⁴⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

¹⁾ The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

²⁾ For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

³⁾ Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51. The internal current transformers for N conductors can be ordered by adding the supplement "-Z" and the order code "F23", see page 1/40.

⁴⁾ ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

4-pole, fixed-mounted versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 66/80 kA at 500 V, standard breaking capacity S	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
	A	A	kA		Article No.	Basic price per PU			kg
Front main circuit connection, single hole									
I	630 800 1000 1250 1600	630 800 1000 1250 1600	66		3WL1106-3□□43-□□□□ 3WL1108-3□□43-□□□□ 3WL1110-3□□43-□□□□ 3WL1112-3□□43-□□□□ 3WL1116-3□□43-□□□□	1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103	50.000 50.000 50.000 50.000 50.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	80		3WL1208-3□□43-□□□□ 3WL1210-3□□43-□□□□ 3WL1212-3□□43-□□□□ 3WL1216-3□□43-□□□□ 3WL1220-3□□43-□□□□ 3WL1225-3□□43-□□□□ 3WL1232-3□□43-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	67.000 67.000 67.000 67.000 67.000 71.000 77.000
Front main circuit connection, double hole									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	66		3WL1106-3□□44-□□□□ 3WL1108-3□□44-□□□□ 3WL1110-3□□44-□□□□ 3WL1112-3□□44-□□□□ 3WL1116-3□□44-□□□□ 3WL1120-3□□44-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	50.000 50.000 50.000 50.000 50.000 50.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	80		3WL1208-3□□44-□□□□ 3WL1210-3□□44-□□□□ 3WL1212-3□□44-□□□□ 3WL1216-3□□44-□□□□ 3WL1220-3□□44-□□□□ 3WL1225-3□□44-□□□□ 3WL1232-3□□44-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	67.000 67.000 67.000 67.000 67.000 71.000 77.000

Options		Additional price	
Non-automatic air circuit breakers²⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU15B: Protection functions LI	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ³⁾	EB	✓
	ETU45B: Protection functions LSIN ³⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ³⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ³⁾	DG	✓
	ETU45B: Protection functions LSING ³⁾⁴⁾	EG	✓
	ETU45B: Protection functions LSING ³⁾⁴⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ³⁾⁴⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

¹⁾ The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

²⁾ For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

³⁾ Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51. The internal current transformers for N conductors can be ordered by adding the supplement "-Z" and the order code "F23", see page 1/40.

⁴⁾ ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

4-pole, fixed-mounted versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 85/100 kA at 500 V, high breaking capacity H 	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
					Article No.	Basic price per PU			
A	A	A	kA	kg					
Horizontal main circuit connection									
I	630	630	85	3WL1106-4□□42-□□□□		1	1 unit	103	50.000
	800	800		3WL1108-4□□42-□□□□		1	1 unit	103	50.000
	1000	1000		3WL1110-4□□42-□□□□		1	1 unit	103	50.000
	1250	1250		3WL1112-4□□42-□□□□		1	1 unit	103	50.000
	1600	1600		3WL1116-4□□42-□□□□		1	1 unit	103	50.000
	2000	2000		3WL1120-4□□42-□□□□		1	1 unit	103	50.000
II	800	800	100	3WL1208-4□□42-□□□□		1	1 unit	103	67.000
	1000	1000		3WL1210-4□□42-□□□□		1	1 unit	103	67.000
	1250	1250		3WL1212-4□□42-□□□□		1	1 unit	103	67.000
	1600	1600		3WL1216-4□□42-□□□□		1	1 unit	103	67.000
	2000	2000		3WL1220-4□□42-□□□□		1	1 unit	103	67.000
	2500	2500		3WL1225-4□□42-□□□□		1	1 unit	103	71.000
	3200	3200		3WL1232-4□□42-□□□□		1	1 unit	103	77.000
III	4000	4000	100	3WL1340-4□□42-□□□□		1	1 unit	103	99.000
	5000	5000		3WL1350-4□□42-□□□□		1	1 unit	103	99.000
Vertical main circuit connection									
I	630	630	85	3WL1106-4□□41-□□□□		1	1 unit	103	50.000
	800	800		3WL1108-4□□41-□□□□		1	1 unit	103	50.000
	1000	1000		3WL1110-4□□41-□□□□		1	1 unit	103	50.000
	1250	1250		3WL1112-4□□41-□□□□		1	1 unit	103	50.000
	1600	1600		3WL1116-4□□41-□□□□		1	1 unit	103	50.000
	2000	2000		3WL1120-4□□41-□□□□		1	1 unit	103	50.000
II	800	800	100	3WL1208-4□□41-□□□□		1	1 unit	103	67.000
	1000	1000		3WL1210-4□□41-□□□□		1	1 unit	103	67.000
	1250	1250		3WL1212-4□□41-□□□□		1	1 unit	103	67.000
	1600	1600		3WL1216-4□□41-□□□□		1	1 unit	103	67.000
	2000	2000		3WL1220-4□□41-□□□□		1	1 unit	103	67.000
	2500	2500		3WL1225-4□□41-□□□□		1	1 unit	103	71.000
	3200	3200		3WL1232-4□□41-□□□□		1	1 unit	103	77.000
	4000	4000		3WL1240-4□□41-□□□□		1	1 unit	103	103.000
III	4000	4000	100	3WL1340-4□□41-□□□□		1	1 unit	103	99.000
	5000	5000		3WL1350-4□□41-□□□□		1	1 unit	103	99.000
	6300	6300		3WL1363-4□□41-□□□□		1	1 unit	103	108.000

Options		Additional price	
Non-automatic air circuit breakers²⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault prot.		
	ETU15B: Protection functions LI ⁵⁾	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ³⁾	EB	✓
	ETU45B: Protection functions LSIN ³⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ³⁾ with graphics display	NB	✓
	Versions with ground-fault prot.		
	ETU27B: Protection functions LSING ³⁾	DG	✓
	ETU45B: Protection functions LSING ^{3/4)}	EG	✓
	ETU45B: Protection functions LSING ^{3/4)} with 4-line display	FG	✓
	ETU76B: Protection functions LSING ^{3/4)} with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

¹⁾ The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

²⁾ For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

³⁾ Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51. The internal current transformers for N conductors can be ordered by adding the supplement "Z" and the order code "F23", see page 1/40.

⁴⁾ ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

⁵⁾ ETU15B cannot be used with 3WL circuit breakers, size III.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

4-pole, fixed-mounted versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 85/100 kA at 500 V, high breaking capacity H H	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
A	A	A	kA		Article No.	Basic price per PU			kg
Front main circuit connection, single hole									
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	100		3WL1208-4□□43-□□□□ 3WL1210-4□□43-□□□□ 3WL1212-4□□43-□□□□ 3WL1216-4□□43-□□□□ 3WL1220-4□□43-□□□□ 3WL1225-4□□43-□□□□ 3WL1232-4□□43-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	67.000 67.000 67.000 67.000 67.000 71.000 77.000
	4000	4000	100		3WL1340-4□□43-□□□□	1	1 unit	103	99.000
Front main circuit connection, double hole									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	85		3WL1106-4□□44-□□□□ 3WL1108-4□□44-□□□□ 3WL1110-4□□44-□□□□ 3WL1112-4□□44-□□□□ 3WL1116-4□□44-□□□□ 3WL1120-4□□44-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	50.000 50.000 50.000 50.000 50.000 50.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	100		3WL1208-4□□44-□□□□ 3WL1210-4□□44-□□□□ 3WL1212-4□□44-□□□□ 3WL1216-4□□44-□□□□ 3WL1220-4□□44-□□□□ 3WL1225-4□□44-□□□□ 3WL1232-4□□44-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	67.000 67.000 67.000 67.000 67.000 71.000 77.000
III	4000	4000	100		3WL1340-4□□44-□□□□	1	1 unit	103	99.000
Options									
Non-automatic air circuit breakers²⁾		Without Electronic Trip Units		AA		None			
Electronic Trip Units		Versions without ground-fault protection							
		ETU15B: Protection functions LI ⁵⁾		BB					✓
		ETU25B: Protection functions LSI		CB					✓
		ETU45B: Protection functions LSIN ³⁾		EB					✓
		ETU45B: Protection functions LSIN ³⁾ with 4-line display		FB					✓
		ETU76B: Protection functions LSIN ³⁾ with graphics display		NB					✓
		Versions with ground-fault protection							
		ETU27B: Protection functions LSING ³⁾		DG					✓
		ETU45B: Protection functions LSING ³⁾⁴⁾		EG					✓
		ETU45B: Protection functions LSING ³⁾⁴⁾ with 4-line display		FG					✓
		ETU76B: Protection functions LSING ³⁾⁴⁾ with graphics display		NG					✓
Operating mechanism, auxiliary release, auxiliary switch		Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO		1AA2		None			
		For further Article No. supplements see page 1/37							

✓ Additional price

- ¹⁾ The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.
- ²⁾ For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.
- ³⁾ Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51. The internal current transformers for N conductors can be ordered by adding the supplement "-Z" and the order code "F23", see page 1/40.
- ⁴⁾ ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.
- ⁵⁾ ETU15B cannot be used with 3WL circuit breakers, size III.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

4-pole, fixed-mounted versions

Size	Max. rated circuit breaker current $I_{n \text{ max.}}$	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 130 kA at 500 V, very high breaking capacity C	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
	A	A	kA		Article No.	Basic price per PU			kg
Horizontal main circuit connection									
III	4000 5000	4000 5000	130		3WL1340-5□□42-□□□□ 3WL1350-5□□42-□□□□		1 1 unit	103	99.000 99.000
Vertical main circuit connection									
III	4000 5000 6300	4000 5000 6300	130		3WL1340-5□□41-□□□□ 3WL1350-5□□41-□□□□ 3WL1363-5□□41-□□□□		1 1 unit 1 1 unit 1 1 unit	103	99.000 99.000 108.000
Options									
Non-automatic air circuit breakers²⁾		Without Electronic Trip Units			AA			None	
Electronic Trip Units		Versions without ground-fault protection							
		ETU25B: Protection functions LSI			CB			✓	
		ETU45B: Protection functions LSIN ³⁾			EB			✓	
		ETU45B: Protection functions LSIN ³⁾ with 4-line display			FB			✓	
		ETU76B: Protection functions LSIN ³⁾ with graphics display			NB			✓	
		Versions with ground-fault protection							
		ETU27B: Protection functions LSING ³⁾			DG			✓	
		ETU45B: Protection functions LSING ³⁾⁴⁾			EG			✓	
		ETU45B: Protection functions LSING ³⁾⁴⁾ with 4-line display			FG			✓	
		ETU76B: Protection functions LSING ³⁾⁴⁾ with graphics display			NG			✓	
Operating mechanism, auxiliary release, auxiliary switch		Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO			1AA2			None	
		For further Article No. supplements see page 1/37							

✓ Additional price

- 1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.
- 2) For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

- 3) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51. The internal current transformers for N conductors can be ordered by adding the supplement "-Z" and the order code "F23", see page 1/40.
- 4) ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

4-pole, withdrawable versions

Selection and ordering data

Size	Max. rated circuit breaker current $I_{n \text{ max.}}$	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 55/66 kA at 500 V, ECO breaking capacity N	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
A	A	A	kA		Article No.	Basic price per PU			kg
Without guide frames²⁾ (for guide frames, see page 1/45 to 1/50)									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	55		3WL1106-2□□45-□□□□ 3WL1108-2□□45-□□□□ 3WL1110-2□□45-□□□□ 3WL1112-2□□45-□□□□ 3WL1116-2□□45-□□□□ 3WL1120-2□□45-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	54.000 54.000 54.000 54.000 54.000 54.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	66		3WL1208-2□□45-□□□□ 3WL1210-2□□45-□□□□ 3WL1212-2□□45-□□□□ 3WL1216-2□□45-□□□□ 3WL1220-2□□45-□□□□ 3WL1225-2□□45-□□□□ 3WL1232-2□□45-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	75.000 75.000 75.000 75.000 72.000 76.000 82.000
With guide frames, horizontal main circuit connection									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	55		3WL1106-2□□46-□□□□ 3WL1108-2□□46-□□□□ 3WL1110-2□□46-□□□□ 3WL1112-2□□46-□□□□ 3WL1116-2□□46-□□□□ 3WL1120-2□□46-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	84.000 84.000 84.000 84.000 84.000 84.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	66		3WL1208-2□□46-□□□□ 3WL1210-2□□46-□□□□ 3WL1212-2□□46-□□□□ 3WL1216-2□□46-□□□□ 3WL1220-2□□46-□□□□ 3WL1225-2□□46-□□□□ 3WL1232-2□□46-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	109.000 109.000 109.000 109.000 109.000 123.000 136.000

Options		Additional price	
Non-automatic air circuit breakers³⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU15B: Protection functions LI	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ⁴⁾	EB	✓
	ETU45B: Protection functions LSIN ⁴⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ⁴⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ⁴⁾	DG	✓
	ETU45B: Protection functions LSING ⁴⁾⁵⁾	EG	✓
	ETU45B: Protection functions LSING ⁴⁾⁵⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ⁴⁾⁵⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

2) Z options which are installed on the guide frame are not available.

3) For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

4) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51. The internal current transformers for N conductors can be ordered by adding the supplement "-Z" and the order code "F23", see page 1/40.

5) ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

4-pole, withdrawable versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 55/66 kA at 500 V, ECO breaking capacity N N	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.			
					Article No.	Basic price per PU						
A	A	kA	kg									
With guide frames, vertical main circuit connection												
I	630	630	55		3WL1106-2□□47-□□□□	1	1 unit	103	84.000			
	800	800			3WL1108-2□□47-□□□□	1	1 unit	103	84.000			
	1000	1000			3WL1110-2□□47-□□□□	1	1 unit	103	84.000			
	1250	1250			3WL1112-2□□47-□□□□	1	1 unit	103	84.000			
	1600	1600			3WL1116-2□□47-□□□□	1	1 unit	103	84.000			
	2000	2000			3WL1120-2□□47-□□□□	1	1 unit	103	84.000			
II	800	800	66		3WL1208-2□□47-□□□□	1	1 unit	103	109.000			
	1000	1000			3WL1210-2□□47-□□□□	1	1 unit	103	109.000			
	1250	1250			3WL1212-2□□47-□□□□	1	1 unit	103	109.000			
	1600	1600			3WL1216-2□□47-□□□□	1	1 unit	103	109.000			
	2000	2000			3WL1220-2□□47-□□□□	1	1 unit	103	109.000			
	2500	2500			3WL1225-2□□47-□□□□	1	1 unit	103	123.000			
	3200	3200			3WL1232-2□□47-□□□□	1	1 unit	103	136.000			
	4000	4000			3WL1240-2□□47-□□□□	1	1 unit	103	146.000			
	With guide frames, connecting flanges											
I	630	630	55		3WL1106-2□□48-□□□□	1	1 unit	103	84.000			
	800	800			3WL1108-2□□48-□□□□	1	1 unit	103	84.000			
	1000	1000			3WL1110-2□□48-□□□□	1	1 unit	103	84.000			
	1250	1250			3WL1112-2□□48-□□□□	1	1 unit	103	84.000			
	1600	1600			3WL1116-2□□48-□□□□	1	1 unit	103	84.000			
	2000	2000			3WL1120-2□□48-□□□□	1	1 unit	103	84.000			
II	800	800	66		3WL1208-2□□48-□□□□	1	1 unit	103	109.000			
	1000	1000			3WL1210-2□□48-□□□□	1	1 unit	103	109.000			
	1250	1250			3WL1212-2□□48-□□□□	1	1 unit	103	109.000			
	1600	1600			3WL1216-2□□48-□□□□	1	1 unit	103	109.000			
	2000	2000			3WL1220-2□□48-□□□□	1	1 unit	103	109.000			
	2500	2500			3WL1225-2□□48-□□□□	1	1 unit	103	123.000			
	3200	3200			3WL1232-2□□48-□□□□	1	1 unit	103	136.000			

Options		Additional price	
Non-automatic air circuit breakers³⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU15B: Protection functions LI	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ⁴⁾	EB	✓
	ETU45B: Protection functions LSIN ⁴⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ⁴⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ⁴⁾	DG	✓
	ETU45B: Protection functions LSING ⁴⁾⁵⁾	EG	✓
	ETU45B: Protection functions LSING ⁴⁾⁵⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ⁴⁾⁵⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

2) Z options which are installed on the guide frame are not available.

3) For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

4) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51. The internal current transformers for N conductors can be ordered by adding the supplement "-Z" and the order code "F23", see page 1/40.

5) ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

4-pole, withdrawable versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 66/80 kA at 500 V, standard breaking capacity S	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	A	A	kA		Article No.	Basic price per PU			kg
Without guide frames²⁾ (for guide frames, see page 1/45 to 1/50)									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	66		3WL1106-3□□45-□□□□ 3WL1108-3□□45-□□□□ 3WL1110-3□□45-□□□□ 3WL1112-3□□45-□□□□ 3WL1116-3□□45-□□□□ 3WL1120-3□□45-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	54.000 54.000 54.000 54.000 54.000 54.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	80		3WL1208-3□□45-□□□□ 3WL1210-3□□45-□□□□ 3WL1212-3□□45-□□□□ 3WL1216-3□□45-□□□□ 3WL1220-3□□45-□□□□ 3WL1225-3□□45-□□□□ 3WL1232-3□□45-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	72.000 72.000 72.000 72.000 72.000 76.000 82.000
With guide frames, horizontal main circuit connection									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	66		3WL1106-3□□46-□□□□ 3WL1108-3□□46-□□□□ 3WL1110-3□□46-□□□□ 3WL1112-3□□46-□□□□ 3WL1116-3□□46-□□□□ 3WL1120-3□□46-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	84.000 84.000 84.000 84.000 84.000 84.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	80		3WL1208-3□□46-□□□□ 3WL1210-3□□46-□□□□ 3WL1212-3□□46-□□□□ 3WL1216-3□□46-□□□□ 3WL1220-3□□46-□□□□ 3WL1225-3□□46-□□□□ 3WL1232-3□□46-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	109.000 109.000 109.000 109.000 109.000 123.000 136.000

Options		Additional price	
Non-automatic air circuit breakers³⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU15B: Protection functions LI	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ⁴⁾	EB	✓
	ETU45B: Protection functions LSIN ⁴⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ⁴⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ⁴⁾	DG	✓
	ETU45B: Protection functions LSING ⁴⁾⁵⁾	EG	✓
	ETU45B: Protection functions LSING ⁴⁾⁵⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ⁴⁾⁵⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

2) Z options which are installed on the guide frame are not available.

3) For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

4) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51. The internal current transformers for N conductors can be ordered by adding the supplement "Z" and the order code "F23", see page 1/40.

5) ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

4-pole, withdrawable versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 66/80 kA at 500 V, standard breaking capacity S	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.	
	A	A	kA		Article No.	Basic price per PU			kg	
With guide frames, vertical main circuit connection										
I	630	630	66		3WL1106-3□□47-□□□□		1	1 unit	103	84.000
	800	800			3WL1108-3□□47-□□□□		1	1 unit	103	84.000
	1000	1000			3WL1110-3□□47-□□□□		1	1 unit	103	84.000
	1250	1250			3WL1112-3□□47-□□□□		1	1 unit	103	84.000
	1600	1600			3WL1116-3□□47-□□□□		1	1 unit	103	84.000
	2000	2000			3WL1120-3□□47-□□□□		1	1 unit	103	84.000
II	800	800	80		3WL1208-3□□47-□□□□		1	1 unit	103	109.000
	1000	1000			3WL1210-3□□47-□□□□		1	1 unit	103	109.000
	1250	1250			3WL1212-3□□47-□□□□		1	1 unit	103	109.000
	1600	1600			3WL1216-3□□47-□□□□		1	1 unit	103	109.000
	2000	2000			3WL1220-3□□47-□□□□		1	1 unit	103	109.000
	2500	2500			3WL1225-3□□47-□□□□		1	1 unit	103	123.000
	3200	3200			3WL1232-3□□47-□□□□		1	1 unit	103	136.000
	4000	4000			3WL1240-3□□47-□□□□		1	1 unit	103	146.000
With guide frames, connecting flanges										
I	630	630	66		3WL1106-3□□48-□□□□		1	1 unit	103	84.000
	800	800			3WL1108-3□□48-□□□□		1	1 unit	103	84.000
	1000	1000			3WL1110-3□□48-□□□□		1	1 unit	103	84.000
	1250	1250			3WL1112-3□□48-□□□□		1	1 unit	103	84.000
	1600	1600			3WL1116-3□□48-□□□□		1	1 unit	103	84.000
	2000	2000			3WL1120-3□□48-□□□□		1	1 unit	103	84.000
II	800	800	80		3WL1208-3□□48-□□□□		1	1 unit	103	109.000
	1000	1000			3WL1210-3□□48-□□□□		1	1 unit	103	109.000
	1250	1250			3WL1212-3□□48-□□□□		1	1 unit	103	109.000
	1600	1600			3WL1216-3□□48-□□□□		1	1 unit	103	109.000
	2000	2000			3WL1220-3□□48-□□□□		1	1 unit	103	109.000
	2500	2500			3WL1225-3□□48-□□□□		1	1 unit	103	123.000
	3200	3200			3WL1232-3□□48-□□□□		1	1 unit	103	136.000

Options		Additional price	
Non-automatic air circuit breakers³⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault protection		
	ETU15B: Protection functions LI	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ⁴⁾	EB	✓
	ETU45B: Protection functions LSIN ⁴⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ⁴⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ⁴⁾	DG	✓
	ETU45B: Protection functions LSING ⁴⁾⁵⁾	EG	✓
	ETU45B: Protection functions LSING ⁴⁾⁵⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ⁴⁾⁵⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

¹⁾ The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

²⁾ Z options which are installed on the guide frame are not available.

³⁾ For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

⁴⁾ Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51. The internal current transformers for N conductors can be ordered by adding the supplement "-Z" and the order code "F23", see page 1/40.

⁵⁾ ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

4-pole, withdrawable versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 85/100 kA at 500 V, high breaking capacity H H	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
A	A	A	kA		Article No.	Basic price per PU			kg
Without guide frames²⁾ (for guide frames, see page 1/45 to 1/50)									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	85		3WL1106-4□□45-□□□□ 3WL1108-4□□45-□□□□ 3WL1110-4□□45-□□□□ 3WL1112-4□□45-□□□□ 3WL1116-4□□45-□□□□ 3WL1120-4□□45-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	54.000 54.000 54.000 54.000 54.000 54.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	100		3WL1208-4□□45-□□□□ 3WL1210-4□□45-□□□□ 3WL1212-4□□45-□□□□ 3WL1216-4□□45-□□□□ 3WL1220-4□□45-□□□□ 3WL1225-4□□45-□□□□ 3WL1232-4□□45-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	72.000 72.000 72.000 72.000 72.000 76.000 82.000
III	4000 5000 6300	4000 5000 6300	100		3WL1340-4□□45-□□□□ 3WL1350-4□□45-□□□□ 3WL1363-4□□45-□□□□	1 1 1	1 unit 1 unit 1 unit	103 103 103	106.000 106.000 108.000
With guide frames, horizontal main circuit connection									
I	630 800 1000 1250 1600 2000	630 800 1000 1250 1600 2000	85		3WL1106-4□□46-□□□□ 3WL1108-4□□46-□□□□ 3WL1110-4□□46-□□□□ 3WL1112-4□□46-□□□□ 3WL1116-4□□46-□□□□ 3WL1120-4□□46-□□□□	1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	84.000 84.000 84.000 84.000 84.000 84.000
II	800 1000 1250 1600 2000 2500 3200	800 1000 1250 1600 2000 2500 3200	100		3WL1208-4□□46-□□□□ 3WL1210-4□□46-□□□□ 3WL1212-4□□46-□□□□ 3WL1216-4□□46-□□□□ 3WL1220-4□□46-□□□□ 3WL1225-4□□46-□□□□ 3WL1232-4□□46-□□□□	1 1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103 103	109.000 109.000 109.000 109.000 109.000 123.000 136.000
III	4000 5000	4000 5000	100		3WL1340-4□□46-□□□□ 3WL1350-4□□46-□□□□	1 1	1 unit 1 unit	103 103	190.000 190.000
Options									
Non-automatic air circuit breakers³⁾	Without Electronic Trip Units				AA		Additional price		
Electronic Trip Units	Versions without ground-fault prot.						None		
	ETU15B: Protection functions LI ⁶⁾				BB		✓		
	ETU25B: Protection functions LSI				CB		✓		
	ETU45B: Protection functions LSIN ⁴⁾				EB		✓		
	ETU45B: Protection functions LSIN ⁴⁾ with 4-line display				FB		✓		
	ETU76B: Protection functions LSIN ⁴⁾ with graphics display				NB		✓		
	Versions with ground-fault prot.								
	ETU27B: Protection functions LSING ⁴⁾				DG		✓		
	ETU45B: Protection functions LSING ⁴⁾⁵⁾				EG		✓		
	ETU45B: Protection functions LSING ⁴⁾⁵⁾ with 4-line display				FG		✓		
	ETU76B: Protection functions LSING ⁴⁾⁵⁾ with graphics display				NG		✓		
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO				1AA2		None		
	For further Article No. supplements see page 1/37								

✓ Additional price

1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

2) Z options which are installed on the guide frame are not available.

3) For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

4) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51. The internal current transformers for N conductors can be ordered by adding the supplement "-Z" and the order code "F23", see page 1/40.

5) ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

6) ETU15B cannot be used with 3WL circuit breakers, size III.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

4-pole, withdrawable versions

Size	Max. rated circuit breaker current <i>I</i> _n max.	Rated current ¹⁾ <i>I</i> _n	Breaking capacity <i>I</i> _{cu} = <i>I</i> _{cs}	DT	<i>I</i> _{cu} 85/100 kA at 500 V, high breaking capacity H		PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
					Article No.	Basic price per PU				
A	A	A	kA							kg
With guide frames, vertical main circuit connection										
I	630	630	85		3WL1106-4□□47-□□□□		1	1 unit	103	84.000
	800	800			3WL1108-4□□47-□□□□		1	1 unit	103	84.000
	1000	1000			3WL1110-4□□47-□□□□		1	1 unit	103	84.000
	1250	1250			3WL1112-4□□47-□□□□		1	1 unit	103	84.000
	1600	1600			3WL1116-4□□47-□□□□		1	1 unit	103	84.000
	2000	2000			3WL1120-4□□47-□□□□		1	1 unit	103	84.000
II	800	800	100		3WL1208-4□□47-□□□□		1	1 unit	103	109.000
	1000	1000			3WL1210-4□□47-□□□□		1	1 unit	103	109.000
	1250	1250			3WL1212-4□□47-□□□□		1	1 unit	103	109.000
	1600	1600			3WL1216-4□□47-□□□□		1	1 unit	103	109.000
	2000	2000			3WL1220-4□□47-□□□□		1	1 unit	103	109.000
	2500	2500			3WL1225-4□□47-□□□□		1	1 unit	103	123.000
	3200	3200			3WL1232-4□□47-□□□□		1	1 unit	103	136.000
	4000	4000			3WL1240-4□□47-□□□□		1	1 unit	103	146.000
III	4000	4000	100		3WL1340-4□□47-□□□□		1	1 unit	103	190.000
	5000	5000			3WL1350-4□□47-□□□□		1	1 unit	103	190.000
	6300	6300			3WL1363-4□□47-□□□□		1	1 unit	103	227.000
With guide frames, connecting flanges										
I	630	630	85		3WL1106-4□□48-□□□□		1	1 unit	103	84.000
	800	800			3WL1108-4□□48-□□□□		1	1 unit	103	84.000
	1000	1000			3WL1110-4□□48-□□□□		1	1 unit	103	84.000
	1250	1250			3WL1112-4□□48-□□□□		1	1 unit	103	84.000
	1600	1600			3WL1116-4□□48-□□□□		1	1 unit	103	84.000
	2000	2000			3WL1120-4□□48-□□□□		1	1 unit	103	84.000
II	800	800	100		3WL1208-4□□48-□□□□		1	1 unit	103	109.000
	1000	1000			3WL1210-4□□48-□□□□		1	1 unit	103	109.000
	1250	1250			3WL1212-4□□48-□□□□		1	1 unit	103	109.000
	1600	1600			3WL1216-4□□48-□□□□		1	1 unit	103	109.000
	2000	2000			3WL1220-4□□48-□□□□		1	1 unit	103	109.000
	2500	2500			3WL1225-4□□48-□□□□		1	1 unit	103	123.000
	3200	3200			3WL1232-4□□48-□□□□		1	1 unit	103	136.000
	III	4000		4000	100		3WL1340-4□□48-□□□□		1	1 unit

Options		Additional price	
Non-automatic air circuit breakers³⁾	Without Electronic Trip Units	AA	None
Electronic Trip Units	Versions without ground-fault prot.		
	ETU15B: Protection functions LI ⁶⁾	BB	✓
	ETU25B: Protection functions LSI	CB	✓
	ETU45B: Protection functions LSIN ⁴⁾	EB	✓
	ETU45B: Protection functions LSIN ⁴⁾ with 4-line display	FB	✓
	ETU76B: Protection functions LSIN ⁴⁾ with graphics display	NB	✓
	Versions with ground-fault protection		
	ETU27B: Protection functions LSING ⁴⁾	DG	✓
	ETU45B: Protection functions LSING ⁴⁾⁵⁾	EG	✓
	ETU45B: Protection functions LSING ⁴⁾⁵⁾ with 4-line display	FG	✓
	ETU76B: Protection functions LSING ⁴⁾⁵⁾ with graphics display	NG	✓
Operating mechanism, auxiliary release, auxiliary switch	Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO	1AA2	None
	For further Article No. supplements see page 1/37		

✓ Additional price

1) The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

2) Z options which are installed on the guide frame are not available.

3) For permissible rated short-time current I_{sc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

4) Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51. The internal current transformers for N conductors can be ordered by adding the supplement "-Z" and the order code "F23", see page 1/40.

5) ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

6) ETU15B cannot be used with 3WL circuit breakers, size III.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

4-pole, withdrawable versions

Size	Max. rated circuit breaker current I_n max.	Rated current ¹⁾ I_n	Breaking capacity $I_{cu} = I_{cs}$	DT	I_{cu} 130 kA at 500 V, very high breaking capacity C	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.	
A	A	A	kA		Article No.	Basic price per PU			kg	
Without guide frames ²⁾ (for guide frames, see page 1/45 to 1/50)										
III	4000 5000 6300	4000 5000 6300	130		3WL1340-5□□45-□□□□ 3WL1350-5□□45-□□□□ 3WL1363-5□□45-□□□□		1 1 1	1 unit 1 unit 1 unit	103 103 103	115.000 106.000 108.000
With guide frames, horizontal main circuit connection										
III	4000 5000	4000 5000	130		3WL1340-5□□46-□□□□ 3WL1350-5□□46-□□□□		1 1	1 unit 1 unit	103 103	190.000 190.000
With guide frames, vertical main circuit connection										
III	4000 5000 6300	4000 5000 6300	130		3WL1340-5□□47-□□□□ 3WL1350-5□□47-□□□□ 3WL1363-5□□47-□□□□		1 1 1	1 unit 1 unit 1 unit	103 103 103	190.000 190.000 227.000
Options										
Non-automatic air circuit breakers ³⁾		Without Electronic Trip Units			AA			None		
Electronic Trip Units		Versions without ground-fault protection								
		ETU25B: Protection functions LSI			CB			✓		
		ETU45B: Protection functions LSIN ⁴⁾			EB			✓		
		ETU45B: Protection functions LSIN ⁴⁾ with 4-line display			FB			✓		
		ETU76B: Protection functions LSIN ⁴⁾ with graphics display			NB			✓		
		Versions with ground-fault protection								
		ETU27B: Protection functions LSING ⁴⁾			DG			✓		
		ETU45B: Protection functions LSING ⁴⁾⁵⁾			EG			✓		
		ETU45B: Protection functions LSING ⁴⁾⁵⁾ with 4-line display			FG			✓		
		ETU76B: Protection functions LSING ⁴⁾⁵⁾ with graphics display			NG			✓		
Operating mechanism, auxiliary release, auxiliary switch		Manual operating mechanism with mechanical closing, without 1st and 2nd auxiliary releases; auxiliary switch 2 NC + 2 NO			1AA2			None		
		For further Article No. supplements see page 1/37								

✓ Additional price

¹⁾ The rated current is determined by the rating plug. For the standard version, the supplied module is equal to the maximum rated current. If a lower rated current is required, adaptation by order code on page 1/38.

²⁾ Z options which are installed on the guide frame are not available.

³⁾ For permissible rated short-time current I_{cc} and rated short-circuit making capacity I_{cm} for non-automatic air circuit breakers see page 1/5.

⁴⁾ Current transformers for protection of the N conductor and current transformers for detection of the ground-fault current in the grounded neutral point of the transformer are to be ordered separately, see page 1/51. The internal current transformers for N conductors can be ordered by adding the supplement "-Z" and the order code "F23", see page 1/40.

⁵⁾ ETU45B to ETU76B with ground-fault protection module GFM AT (alarm and tripping), see page 1/51.

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Options

Selection and ordering data

				Article No. supplement		Additional price	
				3WL1... - - □□□□			
Operating mechanisms							
Manual operating mechanism with mechanical closing				1		None	
Manual operating mechanism with mechanical and electrical closing, closing coil suitable for uninterrupted duty, 100 % OP							
50/60 Hz V AC		V DC					
110		110 ... 125		2		✓	
230		220		3		✓	
Manual/motorized operating mechanism with mechanical and electrical closing, closing coil suitable for uninterrupted duty, 100 % OP							
Motor		Closing solenoid					
50/60 Hz V AC		V DC		50/60 Hz V AC		V DC	
208 ... 240		220 ... 250		230		220	
110 ... 127		110 ... 125		110		110 ... 125	
--		24		--		24	
Note							
To order different voltages for motorized operating mechanism and closing solenoid or closing coil for synchronization purposes: "1" at the 13th digit of the Article No. and order codes, see page 1/39 .							
1st auxiliary release							
Type	Condition	U _s 50/60 Hz V AC	U _s V DC				
Without 1st auxiliary release	--	--	--	A		None	
Shunt release suitable for uninterrupted duty, 100 % OP	Operating range 0.85 ... 1.1 × U _s	--	24	B		✓	
		--	30	C		✓	
		--	48	D		✓	
		--	60	E		✓	
		110 ... 127	110 ... 125	F		✓	
		208 ... 240	220 ... 250	G		✓	
2nd auxiliary release							
Type	Condition	U _s 50/60 Hz V AC	U _s V DC				
Without 2nd auxiliary release	--	--	--	A		None	
Shunt release suitable for uninterrupted duty, 100 % OP	Operating range 0.85 ... 1.1 × U _s	--	24	B		✓	
		--	30	C		✓	
		--	48	D		✓	
		--	60	E		✓	
		110 ... 127	110 ... 125	F		✓	
		208 ... 240	220 ... 250	G		✓	
Undervoltage release, instantaneous (≤ 80 ms), short-delay (≤ 200 ms)	Operating range 0.85 ... 1.1 × U _s	--	24	J		✓	
		--	30	K		✓	
		--	48	L		✓	
		--	60	U		✓	
		110 ... 127	110 ... 125	M		✓	
		208 ... 240	220 ... 250	N		✓	
Undervoltage release, can be delayed between 0.2 s and 3.2 s	Operating range 0.85 ... 1.1 × U _s	380 ... 415	--	P		✓	
		--	48	Q		✓	
		110 ... 127	110 ... 125	R		✓	
		208 ... 240	220 ... 250	S		✓	
				T		✓	
Auxiliary switches							
1st auxiliary switch block							
2 NO + 2 NC				2		None	
1st + 2nd auxiliary switch block							
4 NO + 4 NC				4		✓	
6 NO + 2 NC				7		✓	
5 NO + 3 NC				8		✓	

✓ Additional price

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Options

Add "-Z" to the complete Article No. and indicate the appropriate order code(s).			3WL.....-.....-Z □ □ □ +...+...	Additional price		
Operating manuals						
Printed version	French/Italian		A 1 1		✓	
	Spanish/Portuguese		A 1 2		✓	
Rated voltage 1000 V AC and 690 V IT networks						
Conditions	Size	Rated current <i>I</i> _n		Additional price 3-pole	Additional price 4-pole	
Only for circuit breakers with high breaking capacity H (8th digit of the Article No. is a "4") Cannot be combined with "Rated voltage 1150 V AC order code "A15".	I ¹⁾	Up to 2000 A	A 0 5	✓	✓	
		Up to 2000 A	A 0 5	✓	✓	
	II ¹⁾	2500 A	A 0 5	✓	✓	
		3200 A	A 0 5	✓	✓	
		III ¹⁾²⁾	4000 A	A 0 5	✓	✓
			5000 A	A 0 5	✓	✓
		6300 A	A 0 5	✓	✓	
Rated voltage 1150 V AC						
Conditions	Size	Rated current <i>I</i> _n				
Only for circuit breakers with high breaking capacity H (8th digit of the Article No. is a "4") Cannot be combined with "Rated voltage 1000 V AC order code "A05".	II	Up to 2000 A	A 1 5	✓	✓	
		2500 A	A 1 5	✓	✓	
		3200 A	A 1 5	✓	✓	
		4000 A	A 1 5			
Note						
For size III select a circuit breaker with very high breaking capacity C, which can be used as standard up to 1150 V AC.						
Rated voltage 690 V AC (+ 20 %)						
Conditions	Size	Rated current <i>I</i> _n				
Only for 3WL11 circuit breakers, size I, with high breaking capacity H (8th digit of the Article No. is a "4").	I	Up to 2000 A	A 1 6	✓	✓	
Tinned version of the customer's connections on the guide frame³⁾⁴⁾						
Conditions	Size					
Only for circuit breakers in withdrawable version with horizontal connection or flange connection. The normal delivery time increases to 15 work days.	I		A 0 8	✓	✓	
	II		A 0 8	✓	✓	
	III		A 0 8	✓	✓	
Special packaging (moisture protection)						
Special packaging for extended technical requirements						
Cardboard packaging with water-repellent coating on corrugated cardboard (moisture protection)			A 6 1		✓	
Rating plugs						
Conditions	Size	Rated current <i>I</i> _n A			Additional price	
Only one module is possible per circuit breaker (not in conjunction with Electronic Trip Unit ETU15B). As standard the Electronic Trip Units are equipped with a rating plug which is equal to the maximum rated current circuit breaker (<i>I</i> _{n max}). The rated current of the selected rating plug must be smaller than <i>I</i> _{n max} .	I, II	250	B 0 2		None	
		315	B 0 3		None	
		400	B 0 4		None	
		500	B 0 5		None	
		630	B 0 6		None	
		800	B 0 8		None	
	I, II, III	1000	B 1 0		None	
		1250	B 1 2		None	
		1600	B 1 6		None	
	II, III	2000	B 2 0		None	
		2500	B 2 5		None	
		3200	B 3 2		None	
III	4000	B 4 0		None		
	5000	B 5 0		None		
		6300	B 6 3		None	

✓ Additional price

¹⁾ If ordering withdrawable circuit breaker and guide frame separately, specify order code "A05" for withdrawable circuit breaker and guide frame.

²⁾ Not necessary for circuit breakers with very high breaking capacity C as these circuit breakers can be used as standard up to 1150 V AC.

³⁾ Front connections are tinned as standard.

⁴⁾ The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Options

Add "-Z" to the complete Article No. and indicate the appropriate order code(s).			3WL.....-.....-Z □ □ □ +...+...	Additional price	
Indication/operator control elements, door sealing frames					
5-digit mechanical operating cycles counter ¹⁾			C 0 1	✓	
Electrical ON button in the operator panel ²⁾ Possible only for circuit breakers with closing coil.	Button with sealing cap		C 1 1	✓	
	Key operation with lock CES		C 1 2	✓	
Storage status signaling switches ²⁾ (S21)	1 NO contact		C 2 0	✓	
Ready-to-close signaling switches (S20)	1 NO contact		C 2 2	✓	
Signaling switches ²⁾	For the first auxiliary release (S22)		C 2 6	✓	
	For the second auxiliary release (S23)		C 2 7	✓	
Motor shutdown switch in the operator panel ³⁾			S 2 5	✓	
EMERGENCY-STOP pushbuttons	Mushroom pushbutton instead of the mechanical OFF pushbutton		S 2 4	✓	
Door sealing frames			T 4 0	✓	
Reclosing lockout and remote resets					
Automatic reset of the reclosing lockout			K 0 1	✓	
1. Tripped signaling switch ²⁾⁴⁾	1 CO contact		K 0 7	✓	
2. Tripped signaling switch ²⁾⁴⁾⁸⁾	1 NO contact		K 0 6	✓	
Type	50/60 Hz V AC	V DC			
Remote reset solenoid for displays and reset buttons including automatic reset of the reclosing lockout	--	24	K 1 0	✓	
	--	48	K 1 1	✓	
	120	125	K 1 2	✓	
	208 ... 250	208 ... 250	K 1 3	✓	
Motorized operating mechanisms and closing/opening coils					
Type	Conditions	Motor			
		50/60 Hz V AC	V DC		
Motorized operat- ing mechanism	Only possible if the 13th digit of the Article No. = "1"	--	24 ... 30	M 0 1	✓
		--	48 ... 60	M 0 3	✓
		110 ... 127	110 ... 125	M 0 5	✓
		208 ... 240	220 ... 250	M 0 6	✓
Type	Conditions	Activation coils			
		50/60 Hz V AC	V DC		
Closing coil suitable for uninterrupted duty, 100 % OP	Only possible if the 13th digit of the Article No. = "1"	--	24	M 2 1	✓
		--	30	M 2 2	✓
		--	48	M 2 3	✓
		--	60	M 2 4	✓
		110 ... 127	110 ... 125	M 2 5	✓
		208 ... 240	220 ... 250	M 2 6	✓
Type	Conditions	Activation coils			
		50/60 Hz V AC	V DC		
Closing coil ⁵⁾ not suitable for uninter- rupted duty, 5 % OP, synchronizable	Only possible if the 13th digit of the Article No. = "1"	--	24	M 3 1	✓
		--	48	M 3 3	✓
		110 ... 127	110 ... 125	M 3 5	✓
		208 ... 240	220 ... 250	M 3 6	✓
Type	Conditions	Activation coils			
		50/60 Hz V AC	V DC		
Opening coils (shunt release) ⁶⁾⁷⁾	Not suitable for uninter- rupted duty, 5% OP, synchronizable	--	24	M 4 1	✓
		--	48	M 4 3	✓
		110 ... 127	110 ... 125	M 4 5	✓
		208 ... 240	220 ... 250	M 4 6	✓

✓ Additional price

¹⁾ Only possible with motorized operating mechanism.²⁾ Not possible with communications interface option, order code "F02" or "F12".³⁾ Only for switches with motorized operating mechanism, not possible with order codes "C11", "C12".⁴⁾ Not available for non-automatic air circuit breakers.⁵⁾ Overexcited, i.e. operating time 50 ms (standard > 80 ms).⁶⁾ Only possible if the 14th position of the Article No. for the circuit breaker is "A", i.e. "without 1st auxiliary release".⁷⁾ Overexcited, i.e. operating time 50 ms (standard > 80 ms).⁸⁾ Only possible with option "K07".

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Options

Add "-Z" to the complete Article No. and indicate the appropriate order code(s).				3WL.....-.....-Z			Additional price		
				□	□	□	+...+...		
Interlocks, covers, position signaling switches (for fixed-mounted version)				▶	▶	▶			
Mutual mechanical interlockings (interlocking module with Bowden wire 2 m)		Fixed-mounted circuit breakers		S	5	5		✓	
Interlocks, covers, position signaling switches (for withdrawable version)									
Mutual mechanical interlockings (interlocking module with Bowden wire 2 m)		Version							
		For withdrawable circuit breakers with guide frame		R	5	5		✓	
		For guide frames		R	5	6		✓	
		For withdrawable circuit breakers		R	5	7		✓	
Arc chute covers Not available for - 1000 V version (order code "A05") - DC version - 4000 A size II - 1150 V version (order code "A15") - 150 kA version, size III		Number of poles	Size						
		3-pole	I	R	1	0		✓	
			II	R	1	0		✓	
			III	R	1	0		✓	
		4-pole	I	R	1	0		✓	
			II	R	1	0		✓	
			III	R	1	0		✓	
Shutters 2-part lockable with padlocks ¹⁾		Number of poles	Size						
		3-pole	I	R	2	1		✓	
			II	R	2	1		✓	
			III	R	2	1		✓	
		4-pole	I	R	2	1		✓	
			II	R	2	1		✓	
III	R		2	1		✓			
Position signaling switches for guide frames		Connected position	Test position	Disconnected position					
		1 CO	1 CO	1 CO	R	1	5		✓
		3 CO	2 CO	1 CO	R	1	6		✓
Communication and measurement functions									
Breaker status sensor (BSS)				F	0	1		✓	
PROFIBUS-DP communications interface ²⁾		Including COM15 and breaker status sensor (BSS)		F	0	2		✓	
MODBUS-RTU communications interface ²⁾		Including COM16 and breaker status sensor (BSS)		F	1	2		✓	
Measurement function <i>Plus</i> (without PROFIBUS/MODBUS communications interface ³⁾)				F	0	5		✓	
Overload and short-circuit protection for neutral conductors									
Internal current transformer for N conductor Only possible with 4-pole circuit breakers with ETU27B to ETU76B		Size							
		I		F	2	3		✓	
		II		F	2	3		✓	
		III		F	2	3		✓	
EMC filters									
EMC filters • Common-mode interference suppressor filters (e.g. in IT networks, caused by frequency converters) • Insertion loss (asymmetric) in the range 40 kHz to 10 MHz >40 dB.				F	3	1		✓	

✓ Additional price

¹⁾ Padlocks not included in scope of supply.

²⁾ If ordering withdrawable circuit breaker and guide frame separately, specify order code "F02" or "F12" for withdrawable circuit breaker only.

³⁾ Additional voltage transformers are required for connection of the measurement function *Plus*, see page 1/60.

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Options

Add "-Z" to the complete Article No. and indicate the appropriate order code(s).		3WL.....-.....-Z	Additional price
		☐ ☐ ☐ +...+...	
Locking devices (for fixed-mounted versions and withdrawable versions)			
Locking devices against unauthorized closing, in the operator panels The disconnecter unit fulfills the requirements for main circuit breakers according to EN 60204-1	Version		
	Made by CES	S 0 1	✓
	Made by IKON	S 0 3	✓
	Assembly kit FORTRESS or Castell ¹⁾	S 0 5	✓
	Assembly kit for padlocks ²⁾	S 0 7	✓
	Made by Ronis	S 0 8	✓
	Made by Profalux	S 0 9	✓
EMERGENCY-STOP pushbuttons	Mushroom pushbutton instead of the mechanical OFF pushbutton	S 2 4	✓
Locking devices for operating mechanism handles with padlock²⁾		S 3 3	✓
Locking devices (for withdrawable version)			
Locking devices against unauthorized closing, for withdrawable circuit breakers The disconnecter unit fulfills the requirements for main circuit breakers acc. to EN 60204-1, consisting of a lock in the cabinet door, active in the connected position, function is retained when circuit breaker is replaced. Not possible in combination with order code "R81", "R85" or "R86".	Version		
	Made by CES	R 6 1	✓
	Made by Ronis	R 6 8	✓
	Made by Profalux	R 6 0	✓
Locking devices to prevent movement of the withdrawable circuit breakers Safety lock for mounting on the circuit breaker	Version		
	Made by CES	S 7 1	✓
	Made by Profalux	S 7 5	✓
	Made by Ronis	S 7 6	✓
Locking mechanisms (for fixed-mounted versions)			
Locking devices Not possible in combination with order code "R81", "R85" or "R86".	To prevent opening of the cabinet door in ON position	S 3 0	✓
Locking devices (for withdrawable version)			
Locking devices Not possible in combination with order code "R81", "R85" or "R86".	Version		
	To prevent opening of the cabinet door in connected position	R 3 0	✓
	To prevent movement with the cabinet door open	R 5 0	✓
Locking mechanism to prevent movement of the withdrawable circuit breakers in disconnected position , consisting of Bowden wire and lock in the cabinet door Not possible in combination with order code "R30", "R50", "R61", "R68" or "R60".	Version		
	Made by CES	R 8 1	✓
	Made by Ronis	R 8 5	✓
	Made by Profalux	R 8 6	✓
Connection methods for auxiliary conductors (for fixed-mounted and withdrawable versions)			
Connections for screwless terminals (tension spring)	Version		
	Fixed-mounted	N 6 1	✓
	Withdrawable	P 6 1	✓

✓ Additional price

¹⁾ Locks must be ordered from the manufacturer.²⁾ Padlock not included in the scope of supply.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Options

Add "-Z" to the complete Article No.
and indicate the appropriate order code(s).

3WL.....-.....-Z

□ □ □ +...+...

Additional price

For withdrawable circuit breakers with guide frames or for guide frames ¹⁾					Additional price 3-pole	Additional price 4-pole
Note						
To select this connection method the 12th digit of the Article No. for the circuit breaker must be a "6".						
Connection methods for main connections	Size	Rated current I_n				
Top and bottom: ²⁾ accessible from front, single hole	I	Up to 1600 A	P	0 0	✓	✓
	II	Up to 2000 A	P	0 0	✓	✓
		Up to 2500 A	P	0 0	✓	✓
		Up to 3200 A	P	0 0	✓	✓
	III	Up to 4000 A	P	0 0	✓	✓
Connection methods for main connections	Size	Rated current I_n				
Top and bottom: accessible from front, double hole	I	Up to 2000 A	P	0 1	✓	✓
	II	Up to 2000 A	P	0 1	✓	✓
		Up to 2500 A	P	0 1	✓	✓
		Up to 3200 A	P	0 1	✓	✓
	III	Up to 4000 A	P	0 1	✓	✓
Connection methods for main connections	Size	Rated current I_n				
Top: ²⁾ horizontal Bottom: accessible from front, single hole	I	Up to 1600 A	P	0 7	✓	✓
	II	Up to 2000 A	P	0 7	✓	✓
		Up to 2500 A	P	0 7	✓	✓
		Up to 3200 A	P	0 7	✓	✓
	III	Up to 4000 A	P	0 7	✓	✓
Connection methods for main connections	Size	Rated current I_n				
Top: vertical Bottom: horizontal	I	Up to 2000 A	P	1 8	✓	✓
	II	Up to 2000 A	P	1 8	✓	✓
		Up to 2500 A	P	1 8	✓	✓
		Up to 3200 A	P	1 8	✓	✓
	III	Up to 4000 A	P	1 8	✓	✓
	Up to 5000 A	P	1 8	✓	✓	✓
Connection methods for main connections	Size	Rated current I_n				
Top: Connecting flange Bottom: horizontal	I	Up to 2000 A	P	1 9	✓	✓
	II	Up to 2000 A	P	1 9	✓	✓
		Up to 2500 A	P	1 9	✓	✓
		Up to 3200 A	P	1 9	✓	✓
	III	Up to 4000 A	P	1 9	✓	✓
Connection methods for main connections	Size	Rated current I_n				
Top: horizontal Bottom: vertical	I	Up to 2000 A	P	2 3	✓	✓
	II	Up to 2000 A	P	2 3	✓	✓
		Up to 2500 A	P	2 3	✓	✓
		Up to 3200 A	P	2 3	✓	✓
	III	Up to 4000 A	P	2 3	✓	✓
	Up to 5000 A	P	2 3	✓	✓	✓
Connection methods for main connections	Size	Rated current I_n				
Top: horizontal Bottom: connecting flange	I	Up to 2000 A	P	2 8	✓	✓
	II	Up to 2000 A	P	2 8	✓	✓
		Up to 2500 A	P	2 8	✓	✓
		Up to 3200 A	P	2 8	✓	✓
	III	Up to 4000 A	P	2 8	✓	✓

✓ Additional price

¹⁾ Only horizontal connection and vertical connection are available for circuit breakers with very high breaking capacity C.

²⁾ Not for 3WL size I with high breaking capacity H.

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Options

Add "-Z" to the complete Article No.
and indicate the appropriate order code(s).

3WL.....-Z

□ □ □ +...+...

Additional price

For fixed-mounted circuit breakers				Additional price 3-pole	Additional price 4-pole
Note					
To select this connection method the 12th digit of the Article No. for the circuit breaker must be a "2".					
Connection methods for main connections	Size	Rated current I_n			
Top: ¹⁾ horizontal Bottom: accessible from front, single hole	I	Up to 1600 A	N 1 1	✓	✓
	II	Up to 2000 A	N 1 1	✓	✓
		Up to 2500 A	N 1 1	✓	✓
		Up to 3200 A	N 1 1	✓	✓
	III	Up to 4000 A	N 1 1	✓	✓
Connection methods for main connections	Size	Rated current I_n			
Top: vertical Bottom: horizontal	I	Up to 1600 A	N 2 0	✓	✓
	II	Up to 2000 A	N 2 0	✓	✓
		Up to 2500 A	N 2 0	✓	✓
		Up to 3200 A	N 2 0	✓	✓
	III	Up to 4000 A	N 2 0	✓	✓
Top: horizontal Bottom: vertical	I	Up to 2000 A	N 2 4	✓	✓
		Up to 2500 A	N 2 4	✓	✓
	II	Up to 2000 A	N 2 4	✓	✓
		Up to 2500 A	N 2 4	✓	✓
	III	Up to 4000 A	N 2 4	✓	✓

✓ Additional price

¹⁾ Not for 3WL size I with high breaking capacity H

Air Circuit Breakers


3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

Overview

Determination of the number of auxiliary supply connectors required

This selection is only required if the guide frame is ordered under a separate Article No.



The required number of auxiliary supply connectors depends on:

- Operating mechanism type
- Electronic Trip Unit with/without current transformer
- Type and number of auxiliary releases
- Number of auxiliary switches
- COM15/COM16 communication interface

		Number of auxiliary supply connectors	Terminal
a	First auxiliary supply connector X6 always required.	1	X6
b	Operating mechanisms		
b1	Manual operating mechanism with stored-energy feature with mechanical closing	0	
b2	Manual operating mechanism with stored-energy feature with mechanical and electrical closing	0	X6
b3	Manual/motorized operating mechanism with stored-energy feature with mechanical and electrical closing	+1	X5
c	Electronic Trip Units		
c1	Electronic Trip Units ETU15B, ETU25B, ETU27B	0	
c2	Electronic Trip Units ETU45B, ETU76B (internal CubicleBUS)	+1	X8
c3	Connections for external current transformers for overload protection in the N conductor and ground-fault protection	+1	X8
c4	Current transformer installed in the N conductor (required with 3-pole circuit breakers if c2 is not selected)	+1	X8
d	Auxiliary releases		
d1	With/without 1st auxiliary release (shunt release F1)	0	X6
d2	2nd auxiliary release (shunt release F2, undervoltage release F3, delayable undervoltage release F4)	+1	X5
e	Auxiliary switch blocks		
e1	1st auxiliary switch block 2 NO + 2 NC	0	X6
e2	1st and 2nd auxiliary switch block 4 NO + 4 NC or 6 NO + 2 NC or 5 NO + 3 NC (required if b3 or d2 is not selected)	+1	X5
f	Communication modules		
f1	Without communication module COM15/COM16	0	
f2	With communication module COM15/COM16 – occupies the entire terminal strip X7, making the following options no longer possible: • Tripped signal switch S24 • Stored-energy status indication S21 • Electrical ON button S10 • Signaling switch on first and second auxiliary release S22 + S23	+1	X7
g	Optional signals/accessories		
g1	Tripped signaling switch S24 (only when f2 not selected)	+1	X7
g2	Stored-energy status indicator S21 (only when f2 not selected, required if g1 not selected)	+1	X7
g3	Electric ON button S10 (only when f2 not selected, required if g1 or g2 not selected)	+1	X7
g4	Signaling switch at first auxiliary release S22 (only when f2 not selected, required if g1, g2 or g3 not selected)	+1	X7
g5	Signaling switch at second auxiliary release S23 (only when f2 not selected, required if g1, g2, g3 or g4 not selected)	+1	X7
g6	Switch on ready-to-close signaling switch S20	0	X6
g7	Motor shutdown switch S12 (only if motorized operating mechanism selected)	0	X5
g8	Remote reset solenoid F7 (required if c2 not selected)	+1	X8
h	Total number of auxiliary supply connectors	(max. 4)	

For ordering the auxiliary supply connectors see at "Accessories and spare parts, Guide frames for AC circuit breakers/non-automatic air circuit breakers", pages 1/45 to 1/50 and under "Accessories and spare parts, Auxiliary conductor connections, Auxiliary supply connectors", page 1/56.

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

Selection and ordering data

Guide frames for AC circuit breakers/non-automatic air circuit breakers

Size	Max. rated circuit breaker current I_n max.	Breaking capacity $I_{cu} = I_{cs}$	DT	Guide frames for 3-pole circuit breakers/ non-automatic air circuit breakers	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
	A	kA		Article No.	Basic price per PU			kg
Front main circuit connection, single hole								
I	1000	... 66		3WL9211-1AA□□-□□A1		1	1 unit	25.000
	1600	... 66		3WL9211-2AA□□-□□A1		1	1 unit	25.000
II	2000	... 100		3WL9212-3AA□□-□□A1		1	1 unit	31.000
	2500	... 100		3WL9212-4AA□□-□□A1		1	1 unit	39.000
	3200	... 100		3WL9212-5AA□□-□□A1		1	1 unit	45.000
III	4000	... 100		3WL9213-6AA□□-□□A1		1	1 unit	60.000
Front main circuit connection, double hole								
I	1000	... 66		3WL9211-1AB□□-□□A1		1	1 unit	25.000
	1600	... 66		3WL9211-2AB□□-□□A1		1	1 unit	25.000
	2000 ¹⁾	... 85		3WL9211-3AB□□-□□A1		1	1 unit	25.000
II	2000	... 100		3WL9212-3AB□□-□□A1		1	1 unit	31.000
	2500	... 100		3WL9212-4AB□□-□□A1		1	1 unit	39.000
	3200	... 100		3WL9212-5AB□□-□□A1		1	1 unit	45.000
III	4000	... 100		3WL9213-6AB□□-□□A1		1	1 unit	60.000
Horizontal main circuit connection								
I	1000	... 66		3WL9211-1AC□□-□□A1		1	1 unit	25.000
	1600	... 66		3WL9211-2AC□□-□□A1		1	1 unit	25.000
	2000 ¹⁾	... 85		3WL9211-3AC□□-□□A1		1	1 unit	25.000
II	2000	... 100		3WL9212-3AC□□-□□A1		1	1 unit	31.000
	2500	... 100		3WL9212-4AC□□-□□A1		1	1 unit	39.000
	3200	... 100		3WL9212-5AC□□-□□A1		1	1 unit	45.000
III	4000	... 100		3WL9213-6AC□□-□□A1		1	1 unit	60.000
	5000	... 100		3WL9213-7AC□□-□□A1		1	1 unit	60.000
	4000	... 150		3WL9213-6AC□□-□□C1		1	1 unit	63.000
	5000	... 150		3WL9213-7AC□□-□□C1		1	1 unit	63.000
Options								
Number of auxiliary supply connectors		Without		0				Additional price None
		1 connector		1				✓
		2 connectors		2				✓
		3 connectors		3				✓
		4 connectors		4				✓
Note								
For required number of auxiliary supply connectors, see table on page 1/44.								
Type of auxiliary circuit connections		Without		0				None
		With screw connection (SIGUT, standard)		1				✓
		With screwless connection method (tension spring)		2				✓
Position signaling switches								
		Without		0				None
		Option 1: Connected position 1 CO, test position 1 CO, disconnected position 1 CO		1				✓
		Option 2: Connected position 3 CO, test position 2 CO, disconnected position 1 CO		2				✓
Shutters								
		Without		A				None
		With shutter, 2-part, lockable	Size I	B				✓
			Size II	B				✓
			Size III	B				✓

✓ Additional price

¹⁾ For 3WL circuit breakers size I from 630A to 2000A with high breaking capacity H and 3WL circuit breakers size I with rated current $I_n = 2000$ A.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

Add "-Z" to the complete Article No. and indicate the appropriate order code(s).		3WL921.-.....-Z	Additional price
		□ □ □	
Rated voltage 1000 V AC and 690 V IT networks			
Size I (breaking capacity H)	A 0 5		✓
Size II, except 4000 A (breaking capacity H)	A 0 5		✓
Size III, not necessary with circuit breakers with very high breaking capacity	A 0 5		✓
Rated voltage 1150 V AC			
Size II, except 4000 A (breaking capacity H)	A 1 5		✓
Rated voltage 690 V AC (+ 20 %)			
Size I (breaking capacity H)	A 1 6		✓
Tinned version of the customer's connections on guide frame¹⁾²⁾ Only for guide frames with horizontal connection or flange connection			
Size I	A 0 8		✓
Size II	A 0 8		✓
Size III	A 0 8		✓
Notes			
- For main circuit connection vertical and main circuit connecting flange see the following page. - All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see pages 1/38 to 1/43.			

✓ Additional price

¹⁾ Front connections are tinned as standard.

²⁾ The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

Size	Max. rated circuit breaker current I_n max.	Breaking capacity $I_{cu} = I_{cs}$	DT	Guide frames for 3-pole circuit breakers/ non-automatic air circuit breakers	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
A		kA		Article No.	Basic price per PU			kg
Vertical main circuit connection								
I	1000	... 66		3WL9211-1AD□□-□□A1		1	1 unit	103 25.000
	1600	... 66		3WL9211-2AD□□-□□A1		1	1 unit	103 25.000
	2000 ¹⁾	... 85		3WL9211-3AD□□-□□A1		1	1 unit	103 25.000
II	2000	... 100		3WL9212-3AD□□-□□A1		1	1 unit	103 31.000
	2500	... 100		3WL9212-4AD□□-□□A1		1	1 unit	103 39.000
	3200	... 100		3WL9212-5AD□□-□□A1		1	1 unit	103 45.000
III	4000	... 100		3WL9213-6AD□□-□□A1		1	1 unit	103 60.000
	5000	... 100		3WL9213-7AD□□-□□A1		1	1 unit	103 60.000
	6300	... 100		3WL9213-8AD□□-□□A1		1	1 unit	103 70.000
	4000	... 150		3WL9213-6AD□□-□□C1		1	1 unit	103 63.000
	5000	... 150		3WL9213-7AD□□-□□C1		1	1 unit	103 63.000
	6300	... 150		3WL9213-8AD□□-□□C1		1	1 unit	103 74.000
Main circuit connection connecting flanges								
I	1000	... 66		3WL9211-1AE□□-□□A1		1	1 unit	103 25.000
	1600	... 66		3WL9211-2AE□□-□□A1		1	1 unit	103 25.000
	2000 ¹⁾	... 85		3WL9211-3AE□□-□□A1		1	1 unit	103 25.000
II	2000	... 100		3WL9212-3AE□□-□□A1		1	1 unit	103 31.000
	2500	... 100		3WL9212-4AE□□-□□A1		1	1 unit	103 39.000
	3200	... 100		3WL9212-5AE□□-□□A1		1	1 unit	103 45.000
III	4000	... 100		3WL9213-6AE□□-□□A1		1	1 unit	103 60.000
Options								
Number of auxiliary supply connectors		Without	0	None				
		1 connector	1	✓				
		2 connectors	2	✓				
		3 connectors	3	✓				
		4 connectors	4	✓				
Note								
For required number of auxiliary supply connectors, see table on page 1/44.								
Type of auxiliary circuit connections		Without	0	None				
		With screw connection (SIGUT, standard)	1	✓				
		With screwless connection method (tension spring)	2	✓				
Position signaling switches		Without	0	None				
		Option 1: Connected position 1 CO, test position 1 CO, disconnected position 1 CO	1	✓				
		Option 2: Connected position 3 CO, test position 2 CO, disconnected position 1 CO	2	✓				
Shutters		Without	A	None				
		With shutter, Size I	B	✓				
		2-part, Size II	B	✓				
		lockable Size III	B	✓				
Add "-Z" to the complete Article No. and indicate the appropriate order code(s).				3WL921-.....-Z				Additional price
				□ □ □				
Rated voltage 1000 V AC and 690 V IT networks								
Size I (breaking capacity H)				A 0 5				✓
Size II, except 4000 A (breaking capacity H)				A 0 5				✓
Size III, not necessary with circuit breakers with very high breaking capacity				A 0 5				✓
Rated voltage 1150 V AC								
Size II, except 4000 A (breaking capacity H)				A 1 5				✓
Rated voltage 690 V AC (+ 20 %)								
Size I (breaking capacity H)				A 1 6				✓
Tinned version of the customer's connections on guide frame ¹⁾²⁾								
Only for guide frames with horizontal connection or flange connection								
Size I				A 0 8				✓
Size II				A 0 8				✓
Size III				A 0 8				✓
Notes								
• For main circuit connection vertical and main circuit connecting flange see the following page.								
• All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see pages 1/38 to 1/43.								

✓ Additional price

¹⁾ For 3WL circuit breakers size I from 630A to 2000A with high breaking capacity H and 3WL circuit breakers size I with rated current $I_n = 2000$ A.

²⁾ Front connections are tinned as standard.

³⁾ The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

Size	Max. rated circuit breaker current I_n max. A	Breaking capacity $I_{cu} = I_{cs}$ kA	DT	Guide frames for 4-pole circuit breakers/ non-automatic air circuit breakers Article No.	Basic price per PU	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx. kg
Front main circuit connection, single hole									
I	1000	... 66		3WL9211-1BA□□-□□A1		1	1 unit	103	30.000
	1600	... 66		3WL9211-2BA□□-□□A1		1	1 unit	103	30.000
II	2000	... 100		3WL9212-3BA□□-□□A1		1	1 unit	103	37.000
	2500	... 100		3WL9212-4BA□□-□□A1		1	1 unit	103	47.000
	3200	... 100		3WL9212-5BA□□-□□A1		1	1 unit	103	54.000
III	4000	... 100		3WL9213-6BA□□-□□A1		1	1 unit	103	84.000
Front main circuit connection, double hole									
I	1000	... 66		3WL9211-1BB□□-□□A1		1	1 unit	103	30.000
	1600	... 66		3WL9211-2BB□□-□□A1		1	1 unit	103	30.000
	2000 ¹⁾	... 85		3WL9211-3BB□□-□□A1		1	1 unit	103	30.000
II	2000	... 100		3WL9212-3BB□□-□□A1		1	1 unit	103	37.000
	2500	... 100		3WL9212-4BB□□-□□A1		1	1 unit	103	47.000
	3200	... 100		3WL9212-5BB□□-□□A1		1	1 unit	103	54.000
III	4000	... 100		3WL9213-6BB□□-□□A1		1	1 unit	103	84.000
Horizontal main circuit connection									
I	1000	... 66		3WL9211-1BC□□-□□A1		1	1 unit	103	30.000
	1600	... 66		3WL9211-2BC□□-□□A1		1	1 unit	103	30.000
	2000 ¹⁾	... 85		3WL9211-3BC□□-□□A1		1	1 unit	103	30.000
II	2000	... 100		3WL9212-3BC□□-□□A1		1	1 unit	103	37.000
	2500	... 100		3WL9212-4BC□□-□□A1		1	1 unit	103	47.000
	3200	... 100		3WL9212-5BC□□-□□A1		1	1 unit	103	54.000
III	4000	... 100		3WL9213-6BC□□-□□A1		1	1 unit	103	84.000
	5000	... 100		3WL9213-7BC□□-□□A1		1	1 unit	103	84.000
	4000	... 130		3WL9213-6BC□□-□□C1		1	1 unit	103	87.000
	5000	... 130		3WL9213-7BC□□-□□C1		1	1 unit	103	87.000
Options									
Number of auxiliary supply connectors		Without		0					Additional price None
		1 connector		1					✓
		2 connectors		2					✓
		3 connectors		3					✓
		4 connectors		4					✓
Note									
For required number of auxiliary supply connectors, see table on page 1/44.									
Type of auxiliary circuit connections		Without		0					None
		With screw connection (SIGUT, standard)		1					✓
		With screwless connection method (tension spring)		2					✓
Position signaling switches		Without		0					None
		Option 1: Connected position 1 CO, test position 1 CO, disconnected position 1 CO		1					✓
		Option 2: Connected position 3 CO, test position 2 CO, disconnected position 1 CO		2					✓
Shutters		Without		A					None
		With shutter, 2-part, lockable	Size I	B					✓
			Size II	B					✓
			Size III	B					✓

✓ Additional price

¹⁾ For 3WL circuit breakers size I from 630A to 2000A with high breaking capacity H and 3WL circuit breakers size I with rated current $I_n = 2000$ A.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

Add "-Z" to the complete Article No. and indicate the appropriate order code(s).		3WL921.-.....-Z □ □ □	Additional price
Rated voltage 1000 V AC and 690 V IT networks			
Size I (breaking capacity H)	A 0 5		✓
Size II, except 4000 A (breaking capacity H)	A 0 5		✓
Size III, not necessary with circuit breakers with very high breaking capacity	A 0 5		✓
Rated voltage 1150 V AC			
Size II, except 4000 A (breaking capacity H)	A 1 5		✓
Rated voltage 690 V AC (+ 20 %)			
Size I (breaking capacity H)	A 1 6		✓
Tinned version of the customer's connections on guide frame¹⁾²⁾ Only for guide frames with horizontal connection or flange connection			
Size I	A 0 8		✓
Size II	A 0 8		✓
Size III	A 0 8		✓
Notes			
- For main circuit connection vertical and main circuit connecting flange see the following page. - All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see pages 1/38 to 1/43.			

✓ Additional price

¹⁾ Front connections are tinned as standard.

²⁾ The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

Size	Max. rated circuit breaker current <i>I</i> _n max.	Breaking capacity <i>I</i> _{cu} = <i>I</i> _{cs}	DT	Guide frames for 4-pole circuit breakers/ non-automatic air circuit breakers	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
A		kA		Article No.	Basic price per PU			kg
Vertical main circuit connection								
I	1000	... 66		3WL9211-1BD□□-□□A1	1	1 unit	103	30.000
	1600	... 66		3WL9211-2BD□□-□□A1	1	1 unit	103	30.000
	2000 ¹⁾	... 85		3WL9211-3BD□□-□□A1	1	1 unit	103	30.000
II	2000	... 100		3WL9212-3BD□□-□□A1	1	1 unit	103	37.000
	2500	... 100		3WL9212-4BD□□-□□A1	1	1 unit	103	47.000
	3200	... 100		3WL9212-5BD□□-□□A1	1	1 unit	103	54.000
III	4000	... 100		3WL9213-6BD□□-□□A1	1	1 unit	103	84.000
	5000	... 100		3WL9213-7BD□□-□□A1	1	1 unit	103	84.000
	6300	... 100		3WL9213-8BD□□-□□A1	1	1 unit	103	119.000
	4000	... 130		3WL9213-6BD□□-□□C1	1	1 unit	103	88.000
	5000	... 130		3WL9213-7BD□□-□□C1	1	1 unit	103	88.000
	6300	... 130		3WL9213-8BD□□-□□C1	1	1 unit	103	124.000
Main circuit connection connecting flanges								
I	1000	... 66		3WL9211-1BE□□-□□A1	1	1 unit	103	30.000
	1600	... 66		3WL9211-2BE□□-□□A1	1	1 unit	103	30.000
	2000 ¹⁾	... 85		3WL9211-3BE□□-□□A1	1	1 unit	103	30.000
II	2000	... 100		3WL9212-3BE□□-□□A1	1	1 unit	103	37.000
	2500	... 100		3WL9212-4BE□□-□□A1	1	1 unit	103	47.000
	3200	... 100		3WL9212-5BE□□-□□A1	1	1 unit	103	54.000
III	4000	... 100		3WL9213-6BE□□-□□A1	1	1 unit	103	84.000
Options								
Number of auxiliary supply connectors	Without		0		None			
	1 connector		1		✓			
	2 connectors		2		✓			
	3 connectors		3		✓			
	4 connectors		4		✓			
Note								
For required number of auxiliary supply connectors, see table on page 1/44.								
Type of auxiliary circuit connections	Without		0		None			
	With screw connection (SIGUT, standard)		1		✓			
	With screwless connection method (tension spring)		2		✓			
Position signaling switches	Without		0		None			
	Option 1: Connected position 1 CO, test position 1 CO, disconnected position 1 CO		1		✓			
	Option 2: Connected position 3 CO, test position 2 CO, disconnected position 1 CO		2		✓			
Shutters	Without		A		None			
	With shutter, 2-part, lockable	Size I	B		✓			
		Size II	B		✓			
		Size III	B		✓			
Add "-Z" to the complete Article No. and indicate the appropriate order code(s).				3WL921-.....-Z	Additional price			
				□ □ □				
Rated voltage 1000 V AC and 690 V IT networks								
Size I (breaking capacity H)				A 0 5				✓
Size II, except 4000 A (breaking capacity H)				A 0 5				✓
Size III, not necessary with circuit breakers with very high breaking capacity				A 0 5				✓
Rated voltage 1150 V AC								
Size II, except 4000 A (breaking capacity H)				A 1 5				✓
Rated voltage 690 V AC (+ 20 %)								
Size I (breaking capacity H)				A 1 6				✓
Tinned version of the customer's connections on guide frame ¹⁾²⁾								
Only for guide frames with horizontal connection or flange connection								
Size I				A 0 8				✓
Size II				A 0 8				✓
Size III				A 0 8				✓
Notes								
• For main circuit connection vertical and main circuit connecting flange see the following page. • All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see pages 1/38 to 1/43.								

✓ Additional price

¹⁾ For 3WL circuit breakers size I from 630A to 2000A with high breaking capacity H and 3WL circuit breakers size I with rated current $I_n = 2000$ A.



²⁾ Front connections are tinned as standard.

³⁾ The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

	Designation	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx. kg
 NSE0_01610b	Protective devices with device holder and optional measurement function¹⁾							
	Type	With protection function	Measurement function					
	ETU15B	LI	Without	3WL9311-5AA00-0AA2	1	1 unit	103	0.720
	ETU25B	LSI	Without	3WL9312-5AA00-0AA2	1	1 unit	103	0.720
	ETU27B	LSING	Without	3WL9312-7AA00-0AA2	1	1 unit	103	0.720
	ETU45B (without display)	LSIN(G)	Without With measurement function <i>Plus</i>	3WL9314-5AA00-0AA2 3WL9314-5AA20-0AA2	1 1	1 unit 1 unit	103 103	0.720 0.720
	ETU76B	LSIN(G)	Without With measurement function <i>Plus</i>	3WL9317-6AA00-0AA2 3WL9317-6AA20-0AA2	1 1	1 unit 1 unit	103 103	0.720 0.720
	 NSE0_00992b	Rating plugs²⁾						
Size		Rated current I_n (A)						
I, II		250		3WL9111-0AA51-0AA0	1	1 unit	103	0.010
		315		3WL9111-0AA52-0AA0	1	1 unit	103	0.010
		400		3WL9111-0AA53-0AA0	1	1 unit	103	0.010
		500		3WL9111-0AA54-0AA0	1	1 unit	103	0.010
		630		3WL9111-0AA55-0AA0	1	1 unit	103	0.010
		800		3WL9111-0AA56-0AA0	1	1 unit	103	0.010
I, II, III		1000		3WL9111-0AA57-0AA0	1	1 unit	103	0.010
		1250		3WL9111-0AA58-0AA0	1	1 unit	103	0.010
		1600		3WL9111-0AA61-0AA0	1	1 unit	103	0.010
II, III		2000		3WL9111-0AA62-0AA0	1	1 unit	103	0.010
		2500		3WL9111-0AA63-0AA0	1	1 unit	103	0.010
		3200		3WL9111-0AA64-0AA0	1	1 unit	103	0.010
III		4000		3WL9111-0AA65-0AA0	1	1 unit	103	0.010
		5000		3WL9111-0AA66-0AA0	1	1 unit	103	0.010
	6300		3WL9111-0AA67-0AA0	1	1 unit	103	0.010	
 NSE0_01027a	Ground-fault modules³⁾							
	Versions							
	• GFM AT 45B (only for ETU45B) alarm and tripping • GFM AT 55B–76B (only for ETU76B) alarm and tripping			3WL9111-0AT53-0AA0 3WL9111-0AT56-0AA0	1 1	1 unit 1 unit	103 103	0.030 0.030
 NSE0_01609	Displays • For ETU45B • 4-line			3WL9111-0AT81-0AA0	1	1 unit	103	0.060
 NSE0_00990a	Internal current transformers for N conductor Including wiring kit							
	ETU Release 2	Size						
	---	I		3WL9111-0AA11-0AA0	1	1 unit	103	0.200
		II		3WL9111-0AA12-0AA0	1	1 unit	103	0.280
		III		3WL9111-0AA13-0AA0	1	1 unit	103	0.500
	✓	I		3WL9111-0AA14-0AA0	1	1 unit	103	0.200
		II		3WL9111-0AA15-0AA0	1	1 unit	103	0.280
		III		3WL9111-0AA16-0AA0	1	1 unit	103	0.500
	External current transformers for N conductor For T5, "Measurement Method" function see Technical Information at www.siemens.com/lowvoltage/product-support .							
	Copper connection pieces		Size					
 NSE0_00991a	---	I	3WL9111-0AA21-0AA0	1	1 unit	103	0.300	
		II	3WL9111-0AA22-0AA0	1	1 unit	103	0.380	
		III	3WL9111-0AA23-0AA0	1	1 unit	103	0.680	
	✓	I	3WL9111-0AA31-0AA0	1	1 unit	103	1.600	
		II	3WL9111-0AA32-0AA0	1	1 unit	103	4.260	
		III	3WL9111-0AA33-0AA0	1	1 unit	103	8.500	
	EMC filters • Common-mode interference suppressor filters (e.g. in IT networks, caused by frequency converters) • Insertion loss (asymm.) in the range 40 kHz to 10 MHz >40 dB.							
	Versions							
	• Not for ETU Release 2 • Only for ETU Release 2			3WL9111-0AK32-0AA0 3WL9111-0AK34-0AA0	1 1	1 unit 1 unit	103 103	0.280 0.280

¹⁾ For replacement in existing circuit breakers please specify the circuit breaker ID No. when ordering.










²⁾ With the rating plug selected, the maximum rated current $I_{n \max}$ of the circuit breaker must not be exceeded. The following applies $I_n \leq I_{n \max}$.

³⁾ For direct measurement of the ground-fault current, e.g. in the neutral point of the transformer, a 1,200 A/1 A current transformer, class 1, is required. The internal load of the 3WL circuit breaker is 0.11 Ω . If the ground-fault current is to be determined using the vectorial sum of the phases, a transformer must be installed in the neutral conductor.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

	Designation	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg
More accessories for Electronic Trip Units								
 3WL9111-0AT45-0AA0 3WL9111-0AK0-0AA0	Sealable and lockable covers							
	Versions							
	• For ETU15B to ETU45B		3WL9111-0AT45-0AA0		1	1 unit	103	0.050
	• For ETU76		3WL9111-0AT46-0AA0		1	1 unit	103	0.050
	Automatic reset of the reclosing lockout Spare part for option K01 , see "-Z" + order code, page 1/39 .		3WL9111-0AK21-0AA0		1	1 unit	103	0.050
 3WL9111-0AK0-0AA0	Remote reset coils¹⁾ • For mechanical tripped indicator • Spare part for option K10 to K13 , see "-Z" + order code, page 1/39 .							
	Note							
	Automatic reset of the reclosing lockout 3WL9111-0AK21-0AA0 also needed.							
	Versions							
	• 24 V DC		3WL9111-0AK03-0AA0		1	1 unit	103	0.200
 3WL9111-0AK0-0AA0	• 48 V DC		3WL9111-0AK04-0AA0		1	1 unit	103	0.200
	• 120 V AC/125 V DC		3WL9111-0AK05-0AA0		1	1 unit	103	0.200
	• 208-250 V AC/208-250 V DC		3WL9111-0AK06-0AA0		1	1 unit	103	0.200
	Retrofittable internal CubicleBUS wiring for connection to terminal X8 • For ETU45B and ETU76B • Without male connector ²⁾		3WL9111-0AK30-0AA0		1	1 unit	103	0.150
	Retrofittable internal wiring for connection of the external N- and G-transformers to terminal X8 • Not for ETU Release 2 • Without male connector		3WL9111-0AK31-0AA0		1	1 unit	103	0.020
 3WL9111-0AK0-0AA0	Retrofittable internal wiring for connection of the external N- and G-transformers to terminal X8 • For ETU Release 2 • Without male connector		3WL9111-0AK33-0AA0		1	1 unit	103	0.020
Locking devices								
 3WL9111-0BA22-0AA0	Interlocking set for mechanical ON/OFF • consisting of 2 transparent covers each for sealing or for attaching padlocks ⁴⁾ , • Cover with 6.35 mm hole (for tool actuation) • Lock mount for safety lock for key operation							
	Versions							
	• Without safety lock		3WL9111-0BA21-0AA0		1	1 unit	103	0.100
	• Made by CES		3WL9111-0BA22-0AA0		1	1 unit	103	0.300
	• Made by IKON		3WL9111-0BA24-0AA0		1	1 unit	103	0.300
 3WL9111-0BA31-0AA0	Locking devices against unauthorized closing, in the operator panels • The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1 • Spare part for option S01 to S09 , see "-Z" + order code, page 1/41 .							
	Versions							
	• Assembly kit FORTRESS or CASTELL ³⁾		3WL9111-0BA31-0AA0		1	1 unit	103	0.200
	• Made by Ronis		3WL9111-0BA33-0AA0		1	1 unit	103	0.400
	• Made by KIRK-Key ³⁾		3WL9111-0BA34-0AA0		1	1 unit	103	0.270
 3WL9111-0BA53-0AA0	• Made by Profalux		3WL9111-0BA35-0AA0		1	1 unit	103	0.250
	• Made by CES		3WL9111-0BA36-0AA0		1	1 unit	103	0.200
	• Made by IKON		3WL9111-0BA38-0AA0		1	1 unit	103	0.200
	• Assembly kit for padlocks ⁴⁾		3WL9111-0BA41-0AA0		1	1 unit	103	0.360
 3WL9111-0BA53-0AA0	Locking devices against unauthorized closing, for withdrawable circuit breakers • The disconnector unit fulfills the requirements for main circuit breakers acc. to EN 60204-1 • Consisting of lock in the cabinet door, active in connected position; function is retained when circuit breaker is replaced • Spare part for option R60 , R61 , R68 , see "-Z" + order code, page 1/41 .							
	Versions							
	• Made by CES		3WL9111-0BA51-0AA0		1	1 unit	103	0.300
	• Made by IKON		3WL9111-0BA53-0AA0		1	1 unit	103	0.300
	• Made by KIRK-Key ³⁾		3WL9111-0BA57-0AA0		1	1 unit	103	0.300
 3WL9111-0BA53-0AA0	• Made by Ronis		3WL9111-0BA58-0AA0		1	1 unit	103	0.300
	• Made by Profalux		3WL9111-0BA50-0AA0		1	1 unit	103	0.227

¹⁾ Can only be used in conjunction with "automatic reset of reclosing lockout", e. g. "-Z" + "K01", 3WL9111-0AK21-0AA0.




²⁾ Required if communication is retrofitted.

³⁾ Locks, cylinders and keys must be ordered from the manufacturer.

⁴⁾ Padlock not included in the scope of supply.

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

Designation	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg
 Locking devices for operating mechanism handle with padlock¹⁾ Spare part for option S33, see "-Z" + order code, page 1/41. NSE00984 3WL9111-0BA71-0AA0		3WL9111-0BA71-0AA0		1	1 unit	103	0.080
 Locking devices to prevent movement of the withdrawable circuit breakers • Safety lock for mounting on the circuit breaker • Spare part for option S71, S75, S76, see "-Z" + order code, page 1/41. NSE0_00986 3WL9111-0BA76-0AA0		Versions • Made by CES • Made by IKON • Made by Profalux • Made by Ronis • Made by KIRK-Key²⁾		3WL9111-0BA73-0AA0 3WL9111-0BA75-0AA0 3WL9111-0BA76-0AA0 3WL9111-0BA77-0AA0 3WL9111-0BA80-0AA0	1 1 unit 1 1 unit 1 1 unit 1 1 unit 1 1 unit	103 103 103 103 103	0.300 0.200 0.300 0.300 0.400
Interlocking systems • Made by CES • 2 of the same keys for 3 circuit breakers • Locking device in OFF position • Lock in the operator panel • A maximum of 2 circuit breakers can be switched on		3WL9111-0BA43-0AA0		1	1 unit	103	0.360
Locking mechanisms							
 Locking devices to prevent movement of the withdrawable circuit breakers in disconnected position • Consisting of Bowden wire and lock in the cabinet door on the circuit breaker • Spare part for option R81, R85, R86, see "-Z" + order code, page 1/41. Order code, page 1/41. NSE0_00987 3WL9111-0BA83-0AA0		Versions • Made by CES • Made by IKON • Made by Profalux • Made by Ronis		3WL9111-0BA81-0AA0 3WL9111-0BA83-0AA0 3WL9111-0BA85-0AA0 3WL9111-0BA86-0AA0	1 1 unit 1 1 unit 1 1 unit 1 1 unit	103 103 103 103	0.800 0.800 0.800 0.800
Note Not possible in combination with "Locking device to prevent opening of the cabinet door" (order code "R30") or "Locking device to prevent movement with the cabinet door open" (order code "R50").							
 Locking devices to prevent opening of the cabinet door in ON position • Fixed-mounted • Can be defeated • Spare part for option S30, see "-Z" + order code, page 1/41. NSE0_00988 3WL9111-0BB12-0AA0		3WL9111-0BB12-0AA0		1	1 unit	103	0.600
Locking devices to prevent opening of the cabinet door • Guide frames • Can be defeated • Spare part for option R30, see "-Z" + order code, page 1/41. Note Not possible in combination with "Locking device to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").		3WL9111-0BB13-0AA0		1	1 unit	103	0.150
Locking devices to prevent movement with the cabinet door open • Guide frames • Spare part for option R50, see "-Z" + order code, page 1/41. Note Not possible in combination with "Locking device to prevent movement of the withdrawable circuit breakers in disconnected position" (order codes "R81", "R85" or "R86").		3WL9111-0BB15-0AA0		1	1 unit	103	0.150



¹⁾ Padlock not included in the scope of supply.

²⁾ Locks, cylinders and keys must be ordered from the manufacturer.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC







Accessories and spare parts

	Designation	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg
Interlocks								
 NSE0_00989	Mutual mechanical interlocking with 2000 mm Bowden wire (one required for each circuit breaker)							
	Type	When ordered separately	Spare part for					
	3WL9111-0BB21-0AA0	Fixed-mounted circuit breakers	--	Option S55 , see "-Z" + order code, page 1/40 .	3WL9111-0BB21-0AA0	1	1 unit	103 2.700
		Module for withdrawable circuit breakers with guide frame	--	Option R55 , see "-Z" + order code, page 1/40 .	3WL9111-0BB24-0AA0	1	1 unit	103 1.130
		Module for guide frame	✓	Option R56 , see "-Z" + order code, page 1/40 .	3WL9111-0BB22-0AA0	1	1 unit	103 1.100
		Module for withdrawable circuit breaker	✓	Option R57 , see "-Z" + order code, page 1/40 .	3WL9111-0BB23-0AA0	1	1 unit	103 0.150
	Adapter for size III Withdrawable circuit breaker	✓	--	3WL9111-0BB30-0AA0	1	1 unit	103 0.100	
 NSE0_01886	Couplings on the circuit breaker (with ring) for mutual interlocking Can be used in all circuit breakers			3WL9112-8AH47-0AA0	1	1 unit	103 0.160	
	3WL9112-8HA47-0AA0							
Bowden wires								
	Versions							
	2000 mm			3WL9111-0BB45-0AA0	1	1 unit	103 0.150	
	3,000 mm			3WL9111-0BB46-0AA0	1	1 unit	103 0.220	
	4,500 mm			3WL9111-0BB47-0AA0	1	1 unit	103 0.360	
Transfer control devices								
 3KC9000-8TL30	3KC ATC5300 transfer control devices See chapter "Monitoring Devices".							
	3KC9000-8TL30							
Test devices								
	Manual tester Release 2 for Electronic Trip Units ETU15B to ETU76B For testing the Electronic Trip Unit functions of all 3WL ETUs (release 1 and release 2)			3WL9111-0AT32-0AA0	1	1 unit	103 1.100	
	Function testers For testing the tripping characteristics for Electronic Trip Units ETU15B to ETU76B			3WL9111-0AT44-0AA0	1	1 unit	103 8.210	
Capacitor storage devices								
	Capacitor storage devices • For shunt releases • Storage time 5 min			3WL9111-0BA14-0AA0	1	1 unit	103 0.520	
	Rated control supply voltage/rated operational voltage							
	50/60 Hz V AC	V DC						
	220 ... 240	220 ... 250						
	Note • Rated control supply voltage must match the rated control supply voltage of the shunt release • Suitable also for 3VL and 3WN circuit breakers							

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

Designation	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg
Indicators, control elements							
 Ready-to-close signaling switches 1 NO contact - Spare part for option C22, see "-Z" + order code, page 1/39. NSE0_00993a 3WL9111-0AH01-0AA0		3WL9111-0AH01-0AA0		1	1 unit	103	0.020
 Signaling switches¹⁾²⁾ 1st or 2nd auxiliary release - Spare part for option C26 and C27, see "-Z" + order code, page 1/39. NSE0_00994b 3WL9111-0AH02-0AA0		3WL9111-0AH02-0AA0		1	1 unit	103	0.020
		1st tripped signaling switch¹⁾²⁾		1	1 unit	103	0.080
		1 CO contact - Spare part for option K07, see "-Z" + order code, page 1/39.					
		2nd tripped signaling switch¹⁾²⁾³⁾ NEW		1	1 unit	103	0.080
		1 NO contact - Spare part for option K06, see "-Z" + order code, page 1/39.					
 Operating cycles counters - Mechanical⁴⁾ - Spare part for option C01, see "-Z" + order code, page 1/39. NSE0_00995a 3WL9111-0AH07-0AA0		3WL9111-0AH07-0AA0		1	1 unit	103	0.100
		Stored energy status signaling switches¹⁾²⁾		1	1 unit	103	0.030
		1 NO contact - Spare part for option C20, see "-Z" + order code, page 1/39.					
 Position signaling switches for guide frames Spare part for option R15 and R16, see "-Z" + order code, page 1/40. NSE0_00996a 3WL9111-0AH12-0AA0							
		Versions					
		1st block (3 CO contacts) 2nd block (6 CO contacts)		1	1 unit	103	0.200
				1	1 unit	103	0.400
 Electrical ON buttons¹⁾⁵⁾ - Button + wiring²⁾ - For operator panel - Spare part for option C11 and C12, see "-Z" + order code, page 1/39 NSE0_00997a 3WL9111-0AJ0.-0AA0							
		Versions					
		- With sealing cap C11 - With CES C12 assembly kit - With IKON assembly kit		1	1 unit	103	0.150
				1	1 unit	103	0.140
				1	1 unit	103	0.140
		Note					
		Possible only for circuit breakers with closing coil.					
		Motor shutdown switches⁶⁾		1	1 unit	103	0.100
		- Mounting on operator panel - Spare part for option S25, see "-Z" + order code, page 1/39.					
 EMERGENCY-STOP pushbuttons - Mushroom pushbutton instead of the mechanical OFF pushbutton - Spare part for option S24, see "-Z" + order code, page 1/39. NSE00985 3WL9111-0BA72-0AA0		3WL9111-0BA72-0AA0		1	1 unit	103	0.080

1) Not possible with communications interface option, order code "F02" or "F12".

2) X7 auxiliary supply connector required for circuit breakers or guide frames. If this is not already available, please order additionally (see [pages 1/44 and 1/56](#)).

3) Can only be used in combination with 1st tripped signaling switch.

4) Only in conjunction with motorized operating mechanism.






5) Not possible with motor shutdown switch.

6) Not possible with electrical ON button.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

Designation	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg
Auxiliary conductor connections							
 Male connectors for circuit breakers ① 3WL9111-0AB01-0AA0		3WL9111-0AB01-0AA0		1	1 unit	103	0.100
Extension for the 1000 V male connector versions Male connector must be ordered separately.		3WL9111-0AB02-0AA0		1	1 unit	103	0.150
Male connectors and extension for 1000 V		3WL9111-0AB10-0AA0		1	1 unit	103	1.000
Auxiliary supply connectors for circuit breakers or guide frames ②							
 3WL9111-0AB03-0AA0	Versions • Screw connection (SIGUT) • Screwless connection method (tension spring)	3WL9111-0AB03-0AA0		1	1 unit	103	0.070
 3WL9111-0AB04-0AA0		3WL9111-0AB04-0AA0		1	1 unit	103	0.070
 3WL9111-0AB07-0AA0	Coding kits For fixed-mounted versions (X5 to X8) ③	3WL9111-0AB07-0AA0		1	1 unit	103	0.020
 3WL9111-0AB08-0AA0	Sliding contact modules for guide frames ④	3WL9111-0AB08-0AA0		1	1 unit	103	0.100
 3WL9111-0AB18-0AA0	One-part sliding contact modules for guide frames Screw connection (SIGUT) ⑤	3WL9111-0AB18-0AA0		1	1 unit	103	0.120
Blanking blocks for circuit breakers		3WL9111-0AB12-0AA0		1	1 unit	103	0.030

For a complete auxiliary current connection you must order:






Fixed-mounted version: ① + ② + ③

Withdrawable versions: ① + ④ + ② or ① + ⑤

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

	Designation	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx. kg	
Auxiliary releases									
 NSE01000 3WL9111-0AD06-0AA0	Closing coils/shunt releases								
	Versions	Voltage							
	100 % OP	24 V DC	3WL9111-0AD01-0AA0	1	1 unit	103	0.700		
		30 V DC	3WL9111-0AD02-0AA0	1	1 unit	103	0.700		
		48 V DC	3WL9111-0AD03-0AA0	1	1 unit	103	0.700		
		60 V DC	3WL9111-0AD04-0AA0	1	1 unit	103	0.700		
		110 ... 125 V DC/110 ... 127 V AC	3WL9111-0AD05-0AA0	1	1 unit	103	0.700		
		220 ... 250 V DC/208 ... 240 V AC	3WL9111-0AD06-0AA0	1	1 unit	103	0.700		
	5 % OP ¹⁾	24 V DC	3WL9111-0AD11-0AA0	1	1 unit	103	0.700		
		48 V DC	3WL9111-0AD12-0AA0	1	1 unit	103	0.700		
110 ... 125 V DC/110 ... 127 V AC		3WL9111-0AD13-0AA0	1	1 unit	103	0.700			
220 ... 250 V DC/208 ... 240 V AC		3WL9111-0AD14-0AA0	1	1 unit	103	1.800			
Undervoltage releases									
 NSE01001 3WL9111-0AE0.-0AA0  NSE01002 3WL9111-0AE1.-0AA0	Versions	Voltage							
	Instantaneous	24 V DC	3WL9111-0AE01-0AA0	1	1 unit	103	0.730		
		30 V DC	3WL9111-0AE02-0AA0	1	1 unit	103	0.730		
		48 V DC	3WL9111-0AE03-0AA0	1	1 unit	103	0.730		
		60 V DC	3WL9111-0AE07-0AA0	1	1 unit	103	0.730		
		110 ... 125 V DC/110 ... 127 V AC	3WL9111-0AE04-0AA0	1	1 unit	103	0.730		
		220 ... 250 V DC/208 ... 240 V AC	3WL9111-0AE05-0AA0	1	1 unit	103	0.730		
	380 ... 415 V AC	3WL9111-0AE06-0AA0	1	1 unit	103	0.730			
		Delayed	48 V DC	3WL9111-0AE11-0AA0	1	1 unit	103	0.740	
	110 ... 125 V DC/110 ... 127 V AC		3WL9111-0AE12-0AA0	1	1 unit	103	0.740		
	220 ... 250 V DC/208 ... 240 V AC		3WL9111-0AE13-0AA0	1	1 unit	103	0.740		
	380 ... 415 V AC		3WL9111-0AE14-0AA0	1	1 unit	103	0.740		
	Operating mechanisms								
	 NSE0_01003a 3WL9111-0AF0.-0AA0	Motorized operating mechanisms ²⁾							
		Versions							
		• 24 ... 30 V DC • 48 ... 60 V DC • 110 ... 125 V DC/110 ... 127 V AC • 220 ... 250 V DC/208 ... 240 V AC	3WL9111-0AF01-0AA0	1	1 unit	103	1.510		
			3WL9111-0AF02-0AA0	1	1 unit	103	1.510		
			3WL9111-0AF03-0AA0	1	1 unit	103	1.510		
3WL9111-0AF04-0AA0			1	1 unit	103	1.510			
Auxiliary contacts									
 NSE0_01004 3WL9111-0AG03-0AA0	Auxiliary switch blocks								
	Versions								
	• 2 NO contacts + 2 NC contacts • 2 NO contacts • 1 NO contact + 1 NC contact	3WL9111-0AG01-0AA0	1	1 unit	103	0.180			
		3WL9111-0AG02-0AA0	1	1 unit	103	0.080			
		3WL9111-0AG03-0AA0	1	1 unit	103	0.070			






¹⁾ Overexcited, i.e. operating time 50 ms (standard > 80 ms).

²⁾ X5 auxiliary supply connector required for circuit breakers or guide frames.
If this is not already available, please order additionally
(see pages 1/44 and 1/47).

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts





	Designation	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg														
Door sealing frames, hoods, shutters																						
	Door sealing frames Spare part for option T40 , see "-Z" + order code, page 1/39 .		3WL9111-0AP01-0AA0		1	1 unit	103	0.360														
	Protective covers IP55 Notes • Cannot be used in conjunction with door sealing frames • Hood removable and can be opened on both sides		3WL9111-0AP02-0AA0		1	1 unit	103	1.600														
3WL9111-0AP02-0AA0																						
	Shutters Spare part for option R21 , see "-Z" + order code, page 1/40 .																					
	<table><tr><th>Number of poles</th><th>Size</th></tr><tr><td>3-pole</td><td>I</td></tr><tr><td></td><td>II</td></tr><tr><td></td><td>III</td></tr><tr><td>4-pole</td><td>I</td></tr><tr><td></td><td>II</td></tr><tr><td></td><td>III</td></tr></table>	Number of poles	Size	3-pole	I		II		III	4-pole	I		II		III		3WL9111-0AP04-0AA0 3WL9111-0AP06-0AA0 3WL9111-0AP07-0AA0 3WL9111-0AP08-0AA0 3WL9111-0AP11-0AA0 3WL9111-0AP12-0AA0		1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	0.500 0.630 0.860 0.600 0.770 1.070
Number of poles	Size																					
3-pole	I																					
	II																					
	III																					
4-pole	I																					
	II																					
	III																					
3WL9111-0AP0-0AA0																						
Arc chutes																						
	Arc chutes <table><tr><th>Versions</th><th>Size</th></tr><tr><td>690 V</td><td>I</td></tr><tr><td></td><td>II</td></tr><tr><td></td><td>III</td></tr><tr><td>1000 V / 1150 V</td><td>II</td></tr><tr><td></td><td>III</td></tr></table>	Versions	Size	690 V	I		II		III	1000 V / 1150 V	II		III		3WL9111-0AS01-0AA0 3WL9111-0AS02-0AA0 3WL9111-0AS03-0AA0 3WL9111-0AS05-0AA0 3WL9111-0AS06-0AA0		1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103	1.110 1.680 2.980 3.140 5.620		
Versions	Size																					
690 V	I																					
	II																					
	III																					
1000 V / 1150 V	II																					
	III																					
3WL9111-0AS0-0AA0																						
	Arc chute covers¹⁾ • Parts kit for guide frame • Spare part for option R10, see "-Z" + order code, page 1/40. <table><tr><th>Number of poles</th><th>Size</th></tr><tr><td>3-pole</td><td>I</td></tr><tr><td></td><td>II</td></tr><tr><td></td><td>III</td></tr><tr><td>4-pole</td><td>I</td></tr><tr><td></td><td>II</td></tr><tr><td></td><td>III</td></tr></table>	Number of poles	Size	3-pole	I		II		III	4-pole	I		II		III		3WL9111-0AS32-0AA0 3WL9111-0AS36-0AA0 3WL9111-0AS38-0AA0 3WL9111-0AS42-0AA0 3WL9111-0AS44-0AA0 3WL9111-0AS46-0AA0		1 1 1 1 1 1	1 unit 1 unit 1 unit 1 unit 1 unit 1 unit	103 103 103 103 103 103	1.850 2.600 4.050 2.340 3.300 5.210
Number of poles	Size																					
3-pole	I																					
	II																					
	III																					
4-pole	I																					
	II																					
	III																					
3WL9111-0AS3-0AA0																						
Coding for withdrawable version																						
	Coding for withdrawable version By customer, for 36 coding variants Versions • Sizes I and II • Size III		3WL9111-0AR12-0AA0 3WL9111-0AR13-0AA0		1 1	1 unit 1 unit	103 103	0.400 0.310														
3WL9111-0AR12-0AA0 3WL9111-0AR13-0AA0																						

¹⁾ Not available for
 - 1000 V version (order code "A05"),
 - 1150 V version (order code "A15"),
 - DC version,
 - 4000 A size II,
 - circuit breaker with very high breaking capacity C.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

	Designation	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg
Grounding connection								
 NSE0 01018a 3WL9111-0BA02-0AA0	Grounding connection between the guide frame and the withdrawable circuit breaker - For 30 kA ground short-circuit current¹⁾ - Contacting modules for guide frame							
	Versions - Size I and II²⁾ - Size III		3WL9111-0BA01-0AA0 3WL9111-0BA02-0AA0		1 1	1 unit 1 unit	103 103	0.330 0.350
 NSE01019 3WL9111-0BA07-0AA0	Contacting modules for withdrawable circuit breakers							
	Number of poles	Size						
	3-pole	I	3WL9111-0BA05-0AA0		1	1 unit	103	1.250
		II ²⁾	3WL9111-0BA06-0AA0		1	1 unit	103	1.530
III		3WL9111-0BA07-0AA0		1	1 unit	103	2.270	
4-pole	I	3WL9111-0BA08-0AA0		1	1 unit	103	1.500	
	II ²⁾	3WL9111-0BA04-0AA0		1	1 unit	103	1.850	
	III	3WL9111-0BA10-0AA0		1	1 unit	103	2.950	
Support brackets								
 NSE-01022 3WL9111-0BB50-0AA0	Support brackets - For mounting fixed-mounted circuit breakers on vertical plane - Only for sizes I and II (1 set = 2 units)		3WL9111-0BB50-0AA0		1	1 unit	103	7.000
CubicleBUS modules ^{3/6)}								
 NSE0_01023a 3WL9111-0AT23-0AA0	Digital output modules with rotary coding switch, relay outputs		3WL9111-0AT26-0AA0		1	1 unit	103	0.240
	Digital output modules, configurable, relay outputs		3WL9111-0AT20-0AA0		1	1 unit	103	0.310
	Digital input modules		3WL9111-0AT27-0AA0		1	1 unit	103	0.240
	Analog output modules		3WL9111-0AT23-0AA0		1	1 unit	103	0.240
	Zone Selective Interlocking modules		3WL9111-0AT21-0AA0		1	1 unit	103	0.240
Parameterization systems ⁶⁾								
 NSE0_01024a 3WL9111-0AT28-0AA0	BDA Plus^{4/5)} - Parameterization, operation, monitoring and diagnostics of 3WL air circuit breakers using the local interface - Breaker Data Adapter, connection cable to the 3WL air circuit breaker and to the programming device (e.g. notebook) - Can be run with Internet Explorer with JAVA2 VM 1.4.0-01 and higher - With Ethernet interface for connection to Ethernet/Intranet/Internet		3WL9111-0AT33-0AA0		1	1 unit	103	1.200
	Connection cables for BDA Plus - Connection cable for connection of BDA Plus to terminal X8 of the 3WL air circuit breaker - Required if neither COM15 nor COM16 nor other external CubicleBUS modules are available - Length 2 m		3WL9111-0BC21-0AA0		1	1 unit	103	0.350
	powerconfig parameterization software - Parameterization, operation, monitoring and diagnostics of 3WL air circuit breakers using powerconfig software see chapter 13 Software, "Configuring, Visualizing and Controlling with SENTRON". - powerconfig is available free of charge at http://support.automation.siemens.com/WW/view/en/50241697							

¹⁾ For 60 kA ground short-circuit current, order 2.

²⁾ Cannot be used for size II, 4000 A.

³⁾ Each CubicleBUS module is supplied with a 0.2 m factory-fitted cable to connect the modules with each other. A longer factory-fitted cable is required for connection to the circuit breaker.

⁴⁾ A 24 V DC power supply unit is required.


⁵⁾ Operation under Windows Vista and Windows 7 possible with restrictions.

⁶⁾ All communication components, CubicleBUS modules and measurement functions are available for the ETU45B and ETU76B.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

Designation	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg
Accessories for communications³⁾							
Preassembled cables for CubicleBUS modules							
Versions							
• 0,2 m long, for connection to 3WL with COM15/COM16		3WL9111-0BC04-0AA0		1	1 unit	103	0.020
• 1 m long, for connection to 3WL with COM15/COM16		3WL9111-0BC02-0AA0		1	1 unit	103	0.050
• 2 m long, for connection to 3WL with COM15/COM16		3WL9111-0BC03-0AA0		1	1 unit	103	0.060
• 2 m long, for connection to 3WL without COM15/COM16		3WL9111-0BC05-0AA0		1	1 unit	103	0.070
SENTRON manual for communication solutions							
- Detailed description of the communication functions for circuit breakers. Installation, connection, commissioning, data transmission to the PLC. - Free download from: www.siemens.com/lowvoltage/manuals							
Voltage transformers							
3-pole, for 3WL circuit breakers with measurement function <i>Plus</i>¹⁾ 380 ... 690 V/100 V, class 0.5		3WL9111-0BB68-0AA0		1	1 unit	103	2.600
Retrofitting and spare parts³⁾							
PROFIBUS retrofit kits							
Retrofit kit for PROFIBUS communications including COM15, BSS and set of cables for all 3WL air circuit breakers with ETU45B and ETU76B							
		3WL9111-0AT12-0AA0		1	1 unit	103	0.260
COM15 PROFIBUS module							
For ETU45B and ETU76B							
		3WL9111-0AT15-0AA0		1	1 unit	103	0.140
3WL9111-0AT15-0AA0							
COM16 MODBUS modules							
For ETU45B and ETU76B							
		3WL9111-0AT17-0AA0		1	1 unit	103	0.140
MODBUS IEC retrofit kits							
Retrofit kit for MODBUS communications including COM16, BSS and set of cables for all 3WL air circuit breakers with ETU45B and ETU76B							
		3WL9111-0AT18-0AA0		1	1 unit	103	0.260
Breaker status sensor (BSS)							
For ETU45B and ETU76B							
		3WL9111-0AT16-0AA0		1	1 unit	103	0.120
Measurement function <i>Plus</i>²⁾							
- For ETUs Release 2 - Voltage transformer required							
		3WL9111-0AT04-0AA0		1	1 unit	103	0.250




¹⁾ Is required for operation of the measurement function *Plus*.

²⁾ A measuring accuracy of 3 % is reached if retrofitted.

³⁾ All communication components, **CubicleBUS** modules and measurement functions are available for the ETU45B and ETU76B.

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

	Designation	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx. kg
Main conductor connections, fixed-mounted versions (essential accessory)								
Specified for each connection								
 NSE-01010	Front-accessible main connections, single hole at top¹⁾							
	Size	Rated current I_n						
	I	Up to 1000 A 1250 A to 1600 A	3WL9111-0AL01-0AA0 3WL9111-0AL02-0AA0		1 1	1 unit 1 unit	103 103	1.100 1.600
	II	Up to 2000 A Up to 2500 A Up to 3200 A	3WL9111-0AL03-0AA0 3WL9111-0AL04-0AA0 3WL9111-0AL05-0AA0		1 1 1	1 unit 1 unit 1 unit	103 103 103	2.000 3.600 3.500
	III	Up to 4000 A	3WL9111-0AL06-0AA0		1	1 unit	103	6.100
	Front-accessible main connections, single hole at bottom¹⁾							
	Size	Rated current I_n						
	I	Up to 1000 A 1250 A to 1600 A	3WL9111-0AL51-0AA0 3WL9111-0AL52-0AA0		1 1	1 unit 1 unit	103 103	1.000 1.300
	II	Up to 2000 A Up to 2500 A Up to 3200 A	3WL9111-0AL53-0AA0 3WL9111-0AL54-0AA0 3WL9111-0AL55-0AA0		1 1 1	1 unit 1 unit 1 unit	103 103 103	1.800 3.100 3.000
	III	Up to 4000 A	3WL9111-0AL56-0AA0		1	1 unit	103	5.200
 NSE-01011	Front-accessible main connections according to DIN 43673, double hole at top							
	Size	Rated current I_n						
	I	Up to 1000 A ¹⁾ 1250 A to 2000 A	3WL9111-0AL07-0AA0 3WL9111-0AL08-0AA0		1 1	1 unit 1 unit	103 103	1.400 2.000
	II	Up to 2000 A Up to 2500 A Up to 3200 A	3WL9111-0AL11-0AA0 3WL9111-0AL12-0AA0 3WL9111-0AL13-0AA0		1 1 1	1 unit 1 unit 1 unit	103 103 103	2.400 4.500 4.400
	III	Up to 4000 A	3WL9111-0AL14-0AA0		1	1 unit	103	7.800
	Front-accessible main connections according to DIN 43673, double hole at bottom							
	Size	Rated current I_n						
	I	Up to 1000 A ¹⁾ 1250 A to 2000 A	3WL9111-0AL57-0AA0 3WL9111-0AL58-0AA0		1 1	1 unit 1 unit	103 103	1.300 1.700
	II	Up to 2000 A Up to 2500 A Up to 3200 A	3WL9111-0AL61-0AA0 3WL9111-0AL62-0AA0 3WL9111-0AL63-0AA0		1 1 1	1 unit 1 unit 1 unit	103 103 103	2.000 3.700 3.600
	III	Up to 4000 A	3WL9111-0AL64-0AA0		1	1 unit	103	6.400
 NSE-01012	Rear vertical main connections							
	Size	Rated current I_n						
	I ²⁾	Up to 2000 A	3WL9111-0AM01-0AA0		1	1 unit	103	0.500
	II ³⁾	Up to 3200 A	3WL9111-0AM02-0AA0		1	1 unit	103	2.200
	III	Up to 6300 A	3WL9111-0AM03-0AA0		1	1 unit	103	5.000

¹⁾ Not for 3WL size I with high breaking capacity H





²⁾ In the case of vertical connection size I with breaking capacity N and S, up to 1000 A one 3WL9111-0AM01-0AA0 vertical connection is required, up to 2000 A or with breaking capacity H two 3WL9111-0AM01-0AA0 vertical connections are required.

³⁾ In the case of vertical connection size II, up to 2500 A one 3WL9111-0AM02-0AA0 vertical connection is required, up to 3200 A two 3WL9111-0AM02-0AA0 vertical connections are required.

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

	Designation	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg
Main conductor connections, withdrawable versions (essential accessory)								
Specified for each connection								
 NSE-01013 3WL9111-0AN06-0AA0	Front-accessible main connections, single hole at top or at bottom^{1) 2)}							
	Size	Rated current I_n						
	I	Up to 1000 A 1250 A to 1600 A	3WL9111-0AN01-0AA0 3WL9111-0AN02-0AA0		1 1	1 unit 1 unit	103 103	1.000 1.300
	II	Up to 2000 A Up to 2500 A Up to 3200 A	3WL9111-0AN03-0AA0 3WL9111-0AN04-0AA0 3WL9111-0AN05-0AA0		1 1 1	1 unit 1 unit 1 unit	103 103 103	1.800 3.100 3.000
	III	Up to 4000 A	3WL9111-0AN06-0AA0		1	1 unit	103	5.200
 NSE-01014 3WL9111-0AN14-0AA0	Front-accessible main connections according to DIN 43673, double hole at top or at bottom¹⁾							
	Size	Rated current I_n						
	I	Up to 1000 A ²⁾ 1250 A to 2000 A	3WL9111-0AN07-0AA0 3WL9111-0AN08-0AA0		1 1	1 unit 1 unit	103 103	1.300 1.700
	II	Up to 2000 A Up to 2500 A Up to 3200 A	3WL9111-0AN11-0AA0 3WL9111-0AN12-0AA0 3WL9111-0AN13-0AA0		1 1 1	1 unit 1 unit 1 unit	103 103 103	2.000 3.700 3.600
	III	Up to 4000 A	3WL9111-0AN14-0AA0		1	1 unit	103	6.400
 NSE-01017 3WL9111-0AN41-0AA0	Supports for front and DIN connecting bars							
	Number of poles	Size						
	3-pole for 3 bars	I II III	3WL9111-0AN41-0AA0 3WL9111-0AN42-0AA0 3WL9111-0AN43-0AA0		1 1 1	1 unit 1 unit 1 unit	103 103 103	0.700 1.350 2.420
	4-pole for 4 bars	I II III	3WL9111-0AN44-0AA0 3WL9111-0AN45-0AA0 3WL9111-0AN46-0AA0		1 1 1	1 unit 1 unit 1 unit	103 103 103	1.200 2.200 3.200
 NSE-01015 3WL9111-0AN23-0AA0	Rear vertical main connections							
	Size	Rated current I_n						
	I	Up to 1000 A ²⁾ 1250 A to 2000 A	3WL9111-0AN15-0AA0 3WL9111-0AN16-0AA0		1 1	1 unit 1 unit	103 103	0.660 0.870
	II	Up to 2000 A Up to 2500 A Up to 3200 A	3WL9111-0AN17-0AA0 3WL9111-0AN18-0AA0 3WL9111-0AN21-0AA0		1 1 1	1 unit 1 unit 1 unit	103 103 103	1.150 1.490 2.580
	III	Up to 5000 A Up to 6300 A, 3 busbar connection pieces for 3-pole circuit breakers Up to 6300 A, at top, 4 busbar connection pieces for 4-pole circuit breakers Up to 6300 A, at bottom, 4 busbar connection pieces for 4-pole circuit breakers	3WL9111-0AN22-0AA0 3WL9111-0AN23-0AA0 3WL9111-0AN20-0AA0 3WL9111-0AN10-0AA0		1 1 1 1	1 unit 1 unit 1 unit 1 unit	103 103 103 103	6.380 19.170 18.410 18.300
	Rear horizontal main connections							
	Size	Rated current I_n						
	I	Up to 1000 A ²⁾ 1250 A to 2000 A	3WL9111-0AN32-0AA0 3WL9111-0AN33-0AA0		1 1	1 unit 1 unit	103 103	0.630 0.770
	II	Up to 2000 A Up to 2500 A Up to 3200 A	3WL9111-0AN34-0AA0 3WL9111-0AN35-0AA0 3WL9111-0AN36-0AA0		1 1 1	1 unit 1 unit 1 unit	103 103 103	1.020 1.240 2.170
	III	Up to 5000 A	3WL9111-0AN37-0AA0		1	1 unit	103	3.860
 NSE-01016 3WL9111-0AN24-0AA0	Connecting flange							
	Size	Rated current I_n						
	I	Up to 1000 A ²⁾ 1250 A to 2000 A	3WL9111-0AN24-0AA0 3WL9111-0AN25-0AA0		1 1	1 unit 1 unit	103 103	0.610 0.640
	II	Up to 2000 A Up to 2500 A Up to 3200 A	3WL9111-0AN26-0AA0 3WL9111-0AN27-0AA0 3WL9111-0AN28-0AA0		1 1 1	1 unit 1 unit 1 unit	103 103 103	0.980 1.020 1.310
	III	Up to 4000 A	3WL9111-0AN31-0AA0		1	1 unit	103	2.370


¹⁾ When using front-accessible main connections (withdrawable circuit breakers) supports are required.

²⁾ Not for 3WL size I with high breaking capacity H

Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

Designation	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx. kg
Conversion sets							
Conversion set for converting fixed-mounted circuit breakers into withdrawable circuit breakers Guide frames and sliding contact modules must be ordered separately.							
Number of poles	Size						
3-pole	I	3WL9111-0BC11-0AA0		1	1 unit	103	5.100
	II	3WL9111-0BC12-0AA0		1	1 unit	103	5.900
	III	3WL9111-0BC13-0AA0		1	1 unit	103	8.100
4-pole	I	3WL9111-0BC14-0AA0		1	1 unit	103	6.400
	II	3WL9111-0BC15-0AA0		1	1 unit	103	6.450
	III	3WL9111-0BC16-0AA0		1	1 unit	103	10.700
Main contact elements							
 Main contact elements							
Size	$I_{n \max}$						
I	Up to 1600 A	3WL9111-0AM90 L1Y¹⁾		1	1 unit	103	2.800
II	Up to 2500 A	3WL9111-0AM91 L1Y¹⁾		1	1 unit	103	5.870
II	Up to 4000 A	3WL9111-0AM92 L1Y¹⁾		1	1 unit	103	7.700
III	Up to 6300 A	3WL9111-0AM93 L1Y¹⁾		1	1 unit	103	13.740
Notes • The circuit breaker ID No. must be specified when ordering • Specified for each connection (depending on the number of poles on the circuit breaker, order 3 or 4 units) • Article No. is automatically adapted to the circuit breaker ID number							

¹⁾ Please specify the circuit breaker ID No. in plain text when ordering.

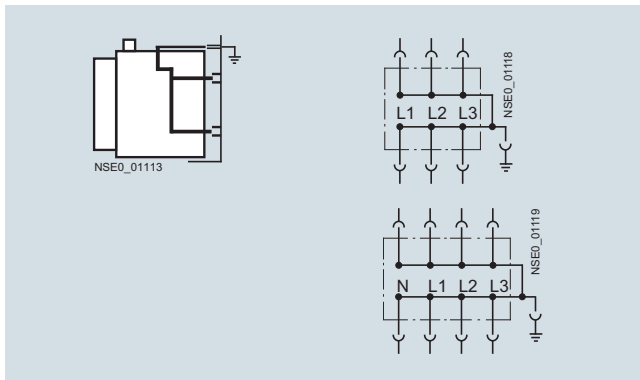
Air Circuit Breakers

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

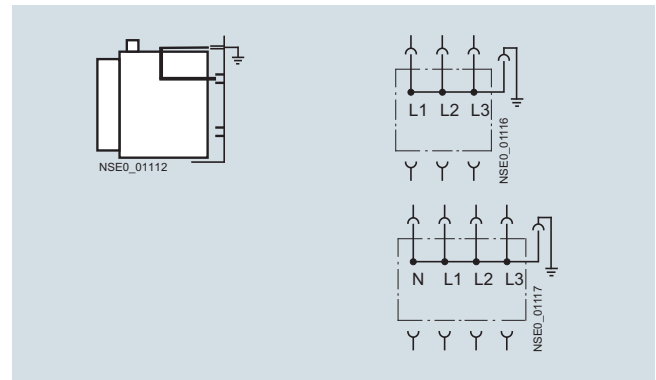
Accessories and spare parts

Version	Size	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx. kg
Withdrawable short-circuiting, grounding and bridging units								
Withdrawable short-circuiting, grounding and bridging units Top and bottom system components are short-circuited and grounded.								
Number of poles	Rated current I_n	Size						
3-pole	Up to 1600 A	I	3WL9111-0BD01-0AA0		1	1 unit	103	30.000
	Up to 3200 A	II	3WL9111-0BD03-0AA0		1	1 unit	103	40.500
	Up to 6300 A	III	3WL9111-0BD05-0AA0		1	1 unit	103	65.000
4-pole	Up to 1600 A	I	3WL9111-0BD02-0AA0		1	1 unit	103	35.000
	Up to 3200 A	II	3WL9111-0BD04-0AA0		1	1 unit	103	46.000
	Up to 6300 A	III	3WL9111-0BD06-0AA0		1	1 unit	103	70.000

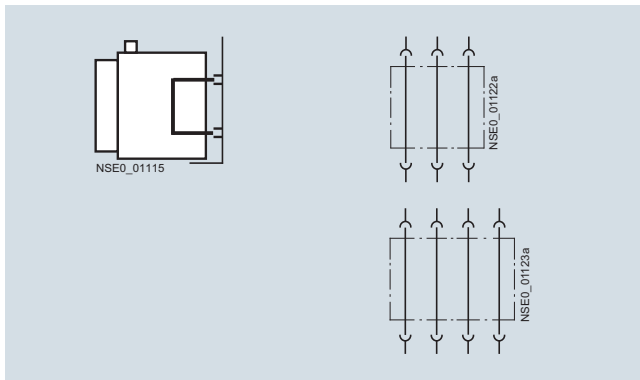
Conversion for the following applications is possible



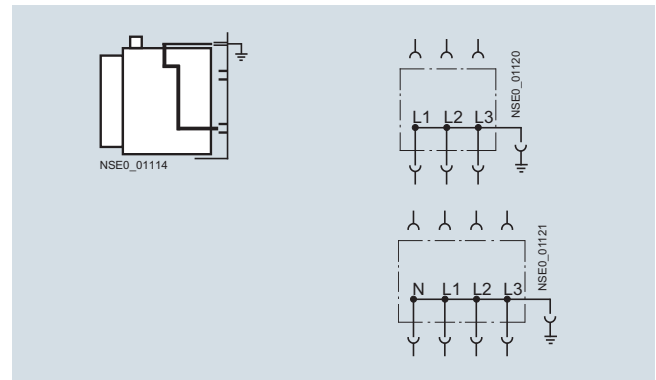
Top and bottom system components are short-circuited and grounded (as-supplied state)



Top system component is short-circuited and grounded, infeed from bottom



Withdrawable bridging unit, infeed and outgoing sides are permanently connected to each other



Bottom system component is short-circuited and grounded, infeed from top

3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC

Accessories and spare parts

Options

Structure of the Article No.

Example			3WL1 2 2 0 - 4 N G 3 1 - 1 F A 2
5th position:	Size	Size II	2
6th and 7th positions:	Max. rated circuit breaker current $I_{n \max}$	$I_{n \max} = 2000 \text{ A}$	2 0
8th position:	Breaking capacity class	High breaking capacity "H": 100 kA	4
9th position:	Electronic Trip Units	ETU76B with graphics display	N
10th position:	Electronic Trip Unit supplement	... with ground-fault protection	G
11th position:	Number of poles	Three-pole	3
12th position:	Installation type	Fixed-mounted, main connections on rear, vertical	1
13th position:	Operating mechanisms	Manual operating mechanism with mechanical closing	1
14th position:	1st auxiliary release	Shunt release 50/60 Hz 110 V AC	F
15th position:	2nd auxiliary release	Without 2nd auxiliary release	A
16th position:	Auxiliary switches	2 NO contacts + 2 NC contacts	2

An important prerequisite for computer-based order processing is that article numbers must be structured according to standardized criteria.

They are used as an unambiguous means of communication for various purposes:

- Offer processing
- Selection and configuration
- Order processing
- Orders
- Order confirmation
- Processing of products for storage
- Order processing in supply locations
- Supply and dispatch
- Reporting and planning
- Service and warranty

The standardized structure ensures that only one Article No. has to be administered for one device.

This saves time and effort during planning, configuring, ordering and in stock keeping, and consequently above all it saves costs.

The example opposite explains the various positions within an Article No.

Accessories: with first order (components are already mounted)

Example		3WL1 2 1 6 - 4 J G 3 1 - 1 F A 3 - Z F 0 2
"-Z" with order code	Communications interface "Standard" + Breaker Status Sensor (BSS) + communication module COM15 for connection to PROFIBUS DP	Z F 0 2

Additional accessory components can be ordered ready-mounted.

These supplements are identified by "-Z".

Even with additional components, one Article No. is sufficient.

Accessories: for retrofitting (components for subsequent fitting)

Example
3WL9 1 1 1 - 0 B A 2 1 - 0 A A 0
Interlocking set for mechanical ON/OFF without lock

Additional accessories which are not intended to be ready-mounted in the factory, such as spare parts for storage, can also be ordered separately from the circuit breaker.

Accessories for retrofitting are identified by the Article No. stem 3WL9.

Documentation

Operating manual Complete set	German/English	Article No.	3ZX18 12-0WL00-0AN1
	French/Italian	Article No.	3ZX18 12-0WL00-0AJ1
	Spanish/Portuguese	Article No.	3ZX18 12-0WL00-0AL1
PROFIBUS manual Communication	German	Article No.	A5E0151347
	English	Article No.	A5E0151353
MODBUS manual Communication	German	Article No.	3ZX10 12-0WL10-1AB1
	English	Article No.	3ZX10 12-0WL10-1AC1

Delivery time class C

On request

On request

Free download of documentation from
www.siemens.com/lowvoltage/manuals

More information

Up-to-date information on the Internet at:
www.siemens.com/sentron

Air Circuit Breakers

3WL Non-Automatic Air Circuit Breakers up to 4000 A (DC)

3- and 4-pole, fixed-mounted versions

Selection and ordering data

For general data see page 1/8.

Size	Max. rated circuit breaker current $I_{n \max}$	DT	3-pole non-automatic air circuit breakers	DC	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	A		Article No.	Price per PU				kg
Horizontal main circuit connection								
II	1000 2000 4000 ¹⁾		3WL1210-8□□32-□□□□ 3WL1220-8□□32-□□□□ 3WL1240-8□□32-□□□□		1 1 1	1 unit 1 unit 1 unit	103 103 103	56.000 56.000 64.000
Vertical main circuit connection								
II	1000 2000 4000 ¹⁾		3WL1210-8□□31-□□□□ 3WL1220-8□□31-□□□□ 3WL1240-8□□31-□□□□		1 1 1	1 unit 1 unit 1 unit	103 103 103	56.000 56.000 85.000
Front main circuit connection, single hole								
II	1000 2000		3WL1210-8□□33-□□□□ 3WL1220-8□□33-□□□□		1 1	1 unit 1 unit	103 103	56.000 56.000
Front main circuit connection, double hole								
II	1000 2000		3WL1210-8□□34-□□□□ 3WL1220-8□□34-□□□□		1 1	1 unit 1 unit	103 103	56.000 56.000
Options								
Non-autom. air circuit breakers²⁾			Without Electro. Trip Units	AA	Add. price		None	
Operating mechanisms			Manual operating mechanism with mechan. closing	1AA2			None	
			For further Article No. supplements see page 1/37					
Size	Max. rated circuit breaker current $I_{n \max}$	DT	4-pole non-automatic air circuit breakers	DC	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	A		Article No.	Price per PU				kg
Horizontal main circuit connection								
II	1000 2000 4000 ¹⁾		3WL1210-8□□42-□□□□ 3WL1220-8□□42-□□□□ 3WL1240-8□□42-□□□□		1 1 1	1 unit 1 unit 1 unit	103 103 103	67.000 67.000 77.000
Vertical main circuit connection								
II	1000 2000 4000 ¹⁾		3WL1210-8□□41-□□□□ 3WL1220-8□□41-□□□□ 3WL1240-8□□41-□□□□		1 1 1	1 unit 1 unit 1 unit	103 103 103	75.000 75.000 103.000
Front main circuit connection, single hole								
II	1000 2000		3WL1210-8□□43-□□□□ 3WL1220-8□□43-□□□□		1 1	1 unit 1 unit	103 103	67.000 67.000
Front main circuit connection, double hole								
II	1000 2000		3WL1210-8□□44-□□□□ 3WL1220-8□□44-□□□□		1 1	1 unit 1 unit	103 103	67.000 67.000
Options								
Non-autom. air circuit breakers²⁾			Without Electron. Trip Units	AA	Add. price		None	
Operating mechanisms			Manual operating mechanism with mechan. closing	1AA2			None	
			For further Article No. supplements see page 1/37					
Add "-Z" to the complete Article No. and indicate the appropriate order code(s).			3WL12.0-8.....-Z □ □ □				Additional price	
							3-pole 4-pole	
Condition	Size	Rated current I_n						
Rated voltage 1000 V DC	II	Up to 2000 A	A 0 5				✓	
		Up to 4000 A	A 0 5				✓	

Note

For voltages over 600 V use the version for 1000 V DC rated voltage: Order with "-Z" and order code "A05". All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see "3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC", "Options", page 1/38 onwards.

An external overload and short-circuit protection device is available from the company "mat" for the 3WL non-automatic air circuit breakers.

Available only directly from the company mat – Maschinen- und Anlagentechnik (for address see page 1/68).

✓ Additional price

¹⁾ Provisions to dissipate heat must be made on the line side.

²⁾ For permissible rated short-time current I_{cw} and short-circuit breaking capacity I_{cc} for non-automatic air circuit breakers, see page 1/5.

Air Circuit Breakers

3WL Non-Automatic Air Circuit Breakers up to 4000 A (DC)

3- and 4-pole, withdrawable versions
Selection and ordering data

Size	Max. rated circuit breaker current $I_{n \max}$	DT	3-pole non-automatic air circuit breakers	DC	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
			Article No.	Price per PU				kg

A

kg

Without guide frames (for guide frames, see page 1/69)

II	1000 2000 4000 ¹⁾		3WL1210-8□□35-□□□□ 3WL1220-8□□35-□□□□ 3WL1240-8□□35-□□□□		1 1 1	1 unit 1 unit 1 unit	103 103 103	60.000 60.000 68.000
----	------------------------------------	--	--	--	-------------	----------------------------	-------------------	----------------------------

With guide frames, horizontal main circuit connection

II	1000 2000 4000 ¹⁾		3WL1210-8□□36-□□□□ 3WL1220-8□□36-□□□□ 3WL1240-8□□36-□□□□		1 1 1	1 unit 1 unit 1 unit	103 103 103	91.000 91.000 113.000
----	------------------------------------	--	--	--	-------------	----------------------------	-------------------	-----------------------------

With guide frames, vertical main circuit connection

II	1000 2000 4000 ¹⁾		3WL1210-8□□37-□□□□ 3WL1220-8□□37-□□□□ 3WL1240-8□□37-□□□□		1 1 1	1 unit 1 unit 1 unit	103 103 103	91.000 91.000 121.000
----	------------------------------------	--	--	--	-------------	----------------------------	-------------------	-----------------------------

With guide frames, connecting flanges

II	1000 2000 4000 ¹⁾		3WL1210-8□□38-□□□□ 3WL1220-8□□38-□□□□ 3WL1240-8□□38-□□□□		1 1 1	1 unit 1 unit 1 unit	103 103 103	91.000 91.000 113.000
----	------------------------------------	--	--	--	-------------	----------------------------	-------------------	-----------------------------

Options

Options		Additional price
Non-automatic air circuit breakers²⁾	Without Electronic Trip Units	AA
Operating mechanisms	Manual operating mechanism with mechanical closing	1AA2
	For further Article No. supplements see page 1/37	

Add "-Z" to the complete Article No. and indicate the appropriate order code(s).	3WL12.0-8..3.-....-Z □ □ □	Additional price 3-pole
--	-------------------------------	-------------------------

Condition	Size	Rated current I_n		
Rated voltage 1000 V DC	II ⁴⁾	Up to 2000 A	A 0 5	✓
		Up to 4000 A	A 0 5	✓
Tinned version of the customer's connections on the guide frame ³⁾ Only for circuit breakers in withdrawable version with horizontal connection or flange connection. The normal delivery time increases to 15 work days.	II		A 0 8	✓

Note

For voltages over 600 V use the version for 1000 V DC rated voltage: Order with "-Z" and order code "A05".

All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see "3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC", "Options", page 1/38 onwards.

An external overload and short-circuit protection device is available from the company "mat" for the 3WL non-automatic air circuit breakers.

Available only directly from the company mat – Maschinen- und Anlagentechnik (for address see page 1/68).

✓ Additional price

- Provisions to dissipate heat must be made on the line side.
- For permissible rated short-time current I_{cw} and short-circuit breaking capacity I_{cc} for non-automatic air circuit breakers, see page 1/5.
- The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.
- If ordering withdrawable circuit breaker and guide frame separately, specify order code "A05" for withdrawable circuit breaker and guide frame.

Air Circuit Breakers

3WL Non-Automatic Air Circuit Breakers up to 4000 A (DC)

3- and 4-pole, withdrawable versions

Selection and ordering data

Size	Max. rated circuit breaker current I_n max.	DT	4-pole non-automatic air circuit breakers 	PU (UNIT, SET, M)	PS*/P. unit	PG	Weight per PU approx.
	A		Article No.	Price per PU			kg
Without guide frames (for guide frames, see page 1/69)							
II	1000 2000 4000 ¹⁾		3WL1210-8□□45-□□□□ 3WL1220-8□□45-□□□□ 3WL1240-8□□45-□□□□	1 1 1	1 unit 1 unit 1 unit	103 103 103	75.000 75.000 82.000
With guide frames, horizontal main circuit connection							
II	1000 2000 4000 ¹⁾		3WL1210-8□□46-□□□□ 3WL1220-8□□46-□□□□ 3WL1240-8□□46-□□□□	1 1 1	1 unit 1 unit 1 unit	103 103 103	109.000 109.000 136.000
With guide frames, vertical main circuit connection							
II	1000 2000 4000 ¹⁾		3WL1210-8□□47-□□□□ 3WL1220-8□□47-□□□□ 3WL1240-8□□47-□□□□	1 1 1	1 unit 1 unit 1 unit	103 103 103	109.000 109.000 146.000
With guide frames, connecting flanges							
II	1000 2000 4000 ¹⁾		3WL1210-8□□48-□□□□ 3WL1220-8□□48-□□□□ 3WL1240-8□□48-□□□□	1 1 1	1 unit 1 unit 1 unit	103 103 103	109.000 109.000 136.000
Options							
Non-automatic air circuit breakers²⁾	Without Electronic Trip Units		AA				Additional price None
Operating mechanisms	Manual operating mechanism with mechanical closing		1AA2				None
	For further Article No. supplements see page 1/37						
Add "-Z" to the complete Article No. and indicate the appropriate order code(s).							
			3WL12.0-8..4.-....-Z □ □ □				
Condition	Size	Rated current I_n					
Rated voltage 1000 V DC	II ⁴⁾	Up to 2000 A	A 0 5				
		Up to 4000 A	A 0 5				
Tinned version of the customer's connections on the guide frame ³⁾ Only for circuit breakers in withdrawable version with horizontal connection or flange connection. The normal delivery time increases to 15 work days.	II		A 0 8				

Note

For voltages over 600 V use the version for 1000 V DC rated voltage: Order with "-Z" and order code "A05".

All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see "3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC", "Options", page 1/38 onwards.

An external overload and short-circuit protection device is available from the company "mat" for the 3WL non-automatic air circuit breakers.

Available only directly from the company mat – Maschinen- und Anlagentechnik⁵⁾.

✓ Additional price

- Provisions to dissipate heat must be made on the line side.
- For permissible rated short-time current I_{cw} and short-circuit breaking capacity I_{cc} for non-automatic air circuit breakers, see page 1/5.
- The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.
- If ordering withdrawable circuit breaker and guide frame separately, specify order code "A05" for withdrawable circuit breaker and guide frame.

⁵⁾ mat – Maschinen- und Anlagentechnik

Dr. Becker GmbH
Rudolf-Diesel-Straße 22
D-22941 Bargtheide
Tel.: +49 (45 32) 20-2101
Fax: +49 (45 32) 20-2121
E-mail: info@m-a-t.de
Internet: www.m-a-t.de

Air Circuit Breakers

3WL Non-Automatic Air Circuit Breakers up to 4000 A (DC)

Accessories and spare parts

Selection and ordering data

Guide frames for DC non-automatic air circuit breakers

Size	Max. rated circuit breaker current <i>I</i> _{n max}	DT	Guide frames for 3-pole non-automatic air circuit breakers	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
	A		Article No.	Price per PU			kg
Front main circuit connection, single hole							
II	2000		3WL9212-3DA□□-□□A1	1	1 unit	103	31.000
Front main circuit connection, double hole							
II	2000		3WL9212-3DB□□-□□A1	1	1 unit	103	31.000
Horizontal main circuit connection							
II	2000		3WL9212-3DC□□-□□A1	1	1 unit	103	31.000
	4000		3WL9212-6DC□□-□□A1	1	1 unit	103	60.000
Vertical main circuit connection							
II	2000		3WL9212-3DD□□-□□A1	1	1 unit	103	31.000
	4000		3WL9212-6DD□□-□□A1	1	1 unit	103	60.000
Main circuit connection connecting flanges							
II	2000		3WL9212-3DE□□-□□A1	1	1 unit	103	31.000
	4000		3WL9212-6DE□□-□□A1	1	1 unit	103	60.000
Options							
No. of aux. supply connectors	Without		0				None
	1 connector		1				✓
	2 connectors		2				✓
	3 connectors		3				✓
	4 connectors		4				✓
Note							
For required number of auxiliary supply connectors, see table on page 1/44 .							
Type of aux. circuit connections	Without		0				None
	With screw connection (SIGUT, standard)		1				✓
	With screwless connection method (tension spring)		2				✓
Position signaling switches	Without		0				None
	Option 1: Connected position 1 CO, test position 1 CO, disconnected position 1 CO		1				✓
	Option 2: Connected position 3 CO, test position 2 CO, disconnected position 1 CO		2				✓
Shutters	Without		A				None
	With shutter, 2-part, lockable		B				✓

Add "-Z" to the complete Article No. and indicate the appropriate order code(s).

3WL9212-.....A1-Z

Additional price

□ □ □

Rated voltage 1000 V DC

Size II	A 0 5	✓
Tinned version of the customer's connections on the guide frame¹⁾ Only for guide frames with horizontal connection or flange connection		
Size II	A 0 8	✓
Notes		
- For guide frames for 4-pole DC non-automatic air circuit breakers see the following page. - All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see "3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC", "Options", page 1/38 onwards.		

✓ Additional price

¹⁾ The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.

Air Circuit Breakers

3WL Non-Automatic Air Circuit Breakers up to 4000 A (DC)

Accessories and spare parts

Size	Max. rated circuit breaker current <i>I</i> _{n max}	DT	Guide frames for 4-pole non-automatic air circuit breakers	PU (UNIT, SET, M)	PS*/ P. unit	PG	Weight per PU approx.
	A		Article No.	Price per PU			kg
Front main circuit connection, single hole							
II	2000		3WL9212-3EA□□-□□A1	1	1 unit	103	37.000
Front main circuit connection, double hole							
II	2000		3WL9212-3EB□□-□□A1	1	1 unit	103	37.000
Horizontal main circuit connection							
II	2000		3WL9212-3EC□□-□□A1	1	1 unit	103	37.000
II	4000		3WL9212-6EC□□-□□A1	1	1 unit	103	84.000
Vertical main circuit connection							
II	2000		3WL9212-3ED□□-□□A1	1	1 unit	103	37.000
II	4000		3WL9212-6ED□□-□□A1	1	1 unit	103	84.000
Main circuit connection connecting flanges							
II	2000		3WL9212-3EE□□-□□A1	1	1 unit	103	37.000
II	4000		3WL9212-6EE□□-□□A1	1	1 unit	103	84.000
Options				Additional price 4-pole			
No. of aux. supply connectors	Without		0		None		
	1 connector		1		✓		
	2 connectors		2		✓		
	3 connectors		3		✓		
	4 connectors		4		✓		
Note							
For required number of auxiliary supply connectors, see table on page 1/44.							
Type of auxiliary circuit connections	Without		0		None		
	With screw connection (SIGUT, standard)		1		✓		
	With screwless connection method (tension spring)		2		✓		
Position signaling switches	Without		0		None		
	Option 1: Connected position 1 CO, test position 1 CO, disconnected position 1 CO		1		✓		
	Option 2: Connected position 3 CO, test position 2 CO, disconnected position 1 CO		2		✓		
Shutters	Without		A		None		
	With shutter, 2-part, lockable		B		✓		
Add "-Z" to the complete Article No. and indicate the appropriate order code(s).				3WL9212-.....A1-Z		Additional price	
				□ □ □			
Rated voltage 1000 V DC							
Size II				A 0 5		✓	
Tinned version of the customer's connections on the guide frame ¹⁾ Only for guide frames with horizontal connection or flange connection							
Size II				A 0 8		✓	
Notes							
- For guide frames for 3-pole DC non-automatic air circuit breakers see previous page. - All other accessory parts must be ordered by specifying "-Z" and the corresponding order code, see "3WL Air Circuit Breakers/Non-Automatic Air Circuit Breakers up to 6300 A (AC), IEC", "Options", page 1/38 onwards.							

✓ Additional price

¹⁾ The permissible temperature-rise limits according to IEC 60947-2 are 5 K lower for a tin surface than for a silver surface.